

APPENDIX B

(See Disk)

Project Report No. 8
South Georgia Minerals Program

State Department of Conservation
Department of Mines, Mining and Geology

A. S. Furcron, Director

HEAVY MINERAL BEARING SAND
OF THE COASTAL REGION OF GEORGIA

By

J. W. Smith and S.M. Pickering, Jr.

J. Roger Landrum

August 1967



PROJECT REPORT NO. 8
SOUTH GEORGIA MINERALS PROGRAM

Georgia
State Division of Conservation
Department of Mines, Mining and Geology

A. S. Furcron, Director

Heavy-Mineral-Bearing Sand
of the
Coastal Region of Georgia

by

James W. Smith
Samuel M. Pickering, Jr.
J. Roger Landrum

July 1967

ERRATA

The following corrections are applicable to Project Report No. 8:

- Page iii, line 20.for Wells read Holes
- Page iv, line 7.for Trial read Trail
- Page vii, paragraph 3, line 7.for amonazite read monazite
- Page 12, paragraph 2, line 1for Otton read Otto
- Page 12, paragraph 3, line 1for Teax read Teas
- Page 35, paragraph 5, line 1for mandellic read mandelic acid
- Page 36, paragraph 2, line 5for mandellic read mandelic
- Page 44, line 1.for WELLS read HOLES
- Page 44, paragraph 1, line 8for loosing read losing
- Page 62, paragraph 1, line 5for starolite read staurolite

CONTENTS

	Page
ABSTRACT -----	v
ACKNOWLEDGMENTS -----	vii
INTRODUCTION -----	1
Definition and Uses -----	1
Purpose of Report -----	1
Area of Report -----	2
Previous Work -----	12
GEOLOGY -----	18
KNOWN DEPOSITS -----	19
METHOD OF STUDY -----	21
Field Methods -----	21
Laboratory Procedures -----	22
Determination of Heavy-Mineral Percentages -----	22
Determination of Titanium-Mineral Percentages in Heavy-Mineral Fractions -----	23
Chemical Analyses of the Heavy-Mineral Fractions -----	35
Radiometric Monazite Analysis -----	36
CONCLUSIONS -----	41
SUGGESTIONS TO FUTURE WORKERS -----	43
ADDENDUM 1: Wells Drilled by Southern Railway System in Charlton County -----	44
ADDENDUM 2: Petrographic Analysis of Core from Effingham County by James Neiheisel -----	51
Laboratory Procedure -----	52
Petrographic Description -----	59
Conclusions on Effingham County Well -----	62
REFERENCES CITED -----	64

TABLES

	Page
1. Locations of auger holes given by geographic descriptions and by Georgia coordinates -----	4
2. Physical properties of samples -----	24
3. Mineral percentages of selected samples -----	31
4. Chemical analyses results on heavy-mineral concentrates -----	38
5. Percentages of heavy minerals and clastic sizes from holes drilled on Trial Ridge by Southern Railway System -----	46
6. Mechanical sieve analysis and composition of sediment samples from Effingham County, Georgia -----	54
7. Average acid insoluble heavy-mineral suite as fractional percent samples from Effingham County, Georgia -----	57

FIGURES

1. County outline map of Southeast Georgia showing auger hole locations -----	3
2. Map of coastal region of Georgia showing large areas of heavy-mineral concentrations and auger hole localities with greater than 2% heavy minerals -----	20
3. Map of southern part of Charlton County, Georgia, showing locations of holes drilled by Southern Railway System -----	45

ABSTRACT

The area of sand in Georgia similar to that mined near Folkston, Georgia, for titanium, zircon and monazite was determined from the literature. Covering this area is a surface sheet of Recent and Pleistocene sand which extends for about 100 miles inland from the Atlantic coast. Eighty holes were augered to an average depth of about eight feet. Core was divided into one- to three-foot interval samples.

The percentages by weight of clay, sand and silt, and larger grains were determined. The sand and silt portion was separated into light and heavy fractions. The percentage of titanium minerals was determined by counting grains, and titanium and zirconium were determined by wet chemical analysis. Monazite content was estimated by radiometric techniques.

Heavy-mineral content was also determined for 12 deep holes fishtail drilled on Trail Ridge, and data are included for one deep hole in Effingham County.

Large areas of heavy-mineral concentrations occur at Folkston, Cumberland Island, Jekyll Island, six miles east of Woodbine, and six miles north of Brunswick.

Holes with samples containing greater than two percent heavy minerals were also augered at Savannah Beach, near Marsh Island, near Walthourville, near Ridgeville, and near Kingsland. No sample of Pleistocene sand containing greater than one percent heavy minerals was found west of Trail Ridge and the approximate 125-foot contour extending northward from the ridge. Concentrations of heavy minerals are generally associated with fine-grained quartz sand.

The higher level Pleistocene sands tested have been leached of some of the undesirable heavy-mineral species, such as the amphiboles and epidote.

Preliminary chemical analyses suggest that the titanium minerals in these sands have been leached of iron. Consequently, these sands are probably of more economic interest than the lower level Pleistocene sands to the east or the Recent sands along the coast and along the Altamaha and Savannah Rivers.

ACKNOWLEDGMENTS

A. S. Furcron suggested and directed the project. This report was prepared by the Georgia Department of Mines, Mining and Geology with the assistance of numerous full and part-time employees.

This report was prepared by James W. Smith, Geologist III, and S. M. Pickering, Jr., Geologist II, of the Department of Mines, Mining and Geology between the summer of 1964 and June of 1967. Vance L. Hendrix, Gerald B. Garr, and Robert E. Hunter assisted the authors in the drilling phase of the work. Gerald B. Garr, Steven C. Englebright, Robert E. Hunter, Anna M. Conn, Martha A. Green, and Claudia O. Storey assisted in the physical and petrographic analyses, and J. Roger Landrum did the chemical analyses. A. S. Furcron and Jesse H. Auvil assisted in editing the report. Claudia O. Storey did the drafting and assisted in editing.

Prior to field work on this project, Thomas E. Garnar, Jr., geologist for E. I. DuPont de Nemours Company near Starke, Florida, discussed and demonstrated many of the aspects of sampling, analyzing, mining, and processing heavy-mineral-bearing sands. Milton E. McLain and Dorsey Smith of the Nuclear Sciences Division, Engineering Experiment Station, Georgia Institute of Technology, analyzed selected samples radiometrically to determine amonazite content. Eugene V. Whittle, Plant Engineer of Humphreys Mining Company at Folkston, kindly arranged for comparison analyses of several samples. H. W. Straley, III, Professor of Geology at the Georgia Institute of Technology, and John E. Husted and Maximo F. Munoz of the Mineral Engineering Branch, Georgia Institute of Technology, discussed methods of exploration and analyses with the authors. James Neiheisel, geologist with the U. S. Army Corps of Engineers, Marietta, Georgia, suggested methods of sampling and analysis, assisted in editing the report, and analyzed the core from the Effingham County hole, Addendum 2. Norman K. Olson, geologist for Southern Railway System, made available the samples discussed in Addendum 1.

INTRODUCTION

Definition and Uses

Heavy-mineral-bearing sands are predominately quartz containing a small percentage of minerals which have considerably higher specific gravities than quartz and, therefore, are easily separated from the quartz. A concentration of the titanium minerals ilmenite-leucosene and rutile is at present the most likely type of heavy-mineral deposit of economic potential in the sands of the coastal region of Georgia. The major use for the titanium in these minerals is in the production of white paint pigment. Titanium is also used extensively for welding-rod coatings. The demand for titanium metal for aircraft and missile manufacture is increasing.

Other heavy minerals of possible value are monazite and xenotime for their rare earth elements and thorium; zircon principally for refractories, foundry sand and facings, ceramics, and zirconium metal; staurolite for portland cement additive; garnet for abrasives; and kyanite and sillimanite for refractory material.

These clastic sediments probably have value other than for the heavy minerals. Of possible potential would be the quartz sand for glass and construction, gravel for construction, and the clay minerals. Clay minerals are now being separated economically from sand in North Florida.

Purpose of Report

The major aim of this work, which utilized only shallow, hand-augered holes, is to familiarize the authors with the problems of heavy-mineral exploration in the coastal region of Georgia so that a more extensive exploration program may be undertaken utilizing a power drill capable of drilling to 50 feet. Also, it is hoped that the hand-operated augering program will be

sufficient to narrow the area of search, and thus indicate to industry the possible location of areas of heavy-mineral concentrations of high quality.

Area of Report

The area studied is a north-south strip adjacent and parallel to the Atlantic Coast, about 150 miles long and 100 miles wide. This includes the following twenty-two counties: Appling, Atkinson, Bacon, Bullock, Brantley, Bryan, Camden, Charlton, Chatham, Clinch, Effingham, Evans, Glynn, Jeff Davis, Lanier, Liberty, Long, McIntosh, Pierce, Tattnall, Ware, and Wayne (Figure 1 and Table 1).



Figure 1. County outline map of Southeast Georgia showing auger hole locations.

TABLE 1

LOCATIONS OF AUGER HOLES GIVEN BY GEOGRAPHIC
 DESCRIPTIONS AND BY GEORGIA COORDINATES

The Georgia Coordinate System's two base points are just southwest of the State for the western part of the system, and just south of the State for the eastern part. Localities in Georgia can be expressed as being so many feet north and east from these base points. Tic marks of the Georgia Coordinate System appear on the margin of the more recent quadrangle topographic maps and the State Highway Department of Georgia county maps. The quadrangle maps used for the coordinates in this table are the 1:250,000 scale topographic maps prepared by the Army Map Service.

The Georgia Coordinate System is divided into two zones--the East Zone and the West Zone. The dividing line between these zones is an irregular north-south line, following county boundary lines, approximately through the middle of the State. Each of these zones has been assigned a central meridian which approximately divides each zone in half. These central meridians are $82^{\circ}10'$ west longitude for the East Zone and $84^{\circ}10'$ west longitude for the West Zone. The central meridians for each zone have arbitrarily been assigned the value of 500,000 feet east for the x-coordinate. The base line for both zones has been assigned to $30^{\circ}00'$ north latitude. This, therefore, puts all numbers in the Georgia Coordinate System in a northeast quadrant and, thus, are positive.

To determine the x, y coordinate, it is necessary to state the zone (East or West) and the coordinates then calculated:

$$\begin{aligned} y &= \text{ft. north of } 30^{\circ}00' \text{ north latitude} \\ x &= 500,000 + x' \text{ where } x' \text{ is feet east of central meridian} \\ x &= 500,000 - x' \text{ where } x' \text{ is feet west of central meridian} \end{aligned}$$

Table 1 - (continued)

<u>Hole No.</u>	<u>Geographic Location</u>	<u>Georgia Coordinates, East Zone</u>
<u>BULLOCH COUNTY</u>		
1.	East side of Ga. Highway 73, 5.7 miles southwest of Statesboro city limit.	860,500 North 598,600 East
2.	North side of Ga. Highway 26, 7.3 miles southeast of Statesboro city limit.	869,300 North 656,300 East
3.	East side of County Road S-1845, 0.7 mile north of Stilson.	849,900 North 690,000 East
<u>EFFINGHAM COUNTY</u>		
4.	Northeast side of Ga. Highway 21, 6.5 miles northwest of Springfield	889,900 North 744,800 East
5.	East side of Ga. Highway 21, 3.3 miles north of Rincon.	848,800 North 784,000 East
6.	East side of Ga. Highway 21, 3.0 miles south of Rincon.	821,000 North 795,500 East
7.	North side of Ga. Highway 30, 3.2 miles west of Chatham County line	799,000 North 766,900 East
<u>TATTNALL COUNTY</u>		
8.	North side of Ga. Highway 23, 0.8 mile southeast of Reidsville.	754,700 North 521,500 East
<u>EVANS COUNTY</u>		
9.	North side of Ga. Highway 30, 8.5 miles northeast of Reidsville.	783,900 North 567,300 East
<u>BRYAN COUNTY</u>		
10.	North side of Ga. Highway 30, 8.2 miles west of Pembroke.	782,900 North 624,500 East
11.	East side of County Road S-1838, 3.3 miles north of Pembroke.	795,800 North 671,500 East
12.	North side of U. S. Highway 280, 0.2 mile west of Effingham County line.	798,300 North 731,200 East

Table 1 - (continued)

6

<u>Hole No.</u>	<u>Geographic Location</u>	<u>Georgia Coordinates, East Zone</u>
<u>BRYAN COUNTY (Con't)</u>		
13.	East side of Ga. Highway 67, 0.2 mile south of Pembroke.	773,800 North 669,600 East
14.	South side of Ga. Highway 204, 13.5 miles east of Pembroke.	773,100 North 723,400 East
15.	North side of Ga. Highway 63, 11 miles southeast of Pembroke.	741,000 North 705,900 East
16.	North side of Ga. Highway 63, 7.3 miles northwest of Richmond Hill.	728,000 North 754,200 East
17.	North side of Ga. Highway 63, 1.2 miles northwest of Richmond Hill.	711,200 North 764,000 East
18.	Turn east off Ga. Highway 63 on road to Ft. McAllister (4.5 miles southeast of Richmond Hill). Sample taken from north side of road, 0.7 mile west of Ft. McAllister.	689,200 North 798,300 East
<u>CHATHAM COUNTY</u>		
19.	North side of Ga. Highway 204, 6.5 miles northwest from intersection with Ga. Highway 25.	749,500 North 756,900 East
20.	West side of Ga. Highway 25, 2.0 miles south of Port Wentworth	768,200 North 814,700 East
21.	North side of Ga. Highway 26 on Wilmington Island, 4.0 miles east of Savannah.	735,600 North 866,000 East
22.	South end of Savannah Beach, dune sand.	725,300 North 908,000 East
<u>LONG COUNTY</u>		
23.	West side of U. S. Highway 301 at Ludowici.	622,000 North 627,000 East
24.	West side of Ga. Highway 38, 7 miles northeast of Ludowici.	644,600 North 661,500 East

Table 1 - (continued)

<u>Hole No.</u>	<u>Geographic Location</u>	<u>Georgia Coordinates, East Zone</u>
<u>LONG COUNTY (Con't)</u>		
25.	South side of Ga. Highway 99, 6.5 miles southeast of intersection with U. S. Highway 301 in Ludowici.	594,400 North 655,600 East
26.	North side of Ga. Highway 99, 11.5 miles southeast of Ludowici.	583,200 North 678,400 East
<u>LIBERTY COUNTY</u>		
27.	North side of Ga. Highway 196, 11 miles west of Hinesville.	676,700 North 634,600 East
28.	East side of Ga. Highway 67, 0.8 mile north of Hinesville city limit.	690,000 North 667,000 East
29.	North side of Ga. Highway 144, 9.0 miles northeast of Hinesville city limit.	711,200 North 704,200 East
30.	North side of Ga. Highway 38, 1.6 miles west of Midway.	657,000 North 722,000 East
31.	North side of Ga. Highway 38, 8 miles southeast of Midway.	632,200 North 757,400 East
32.	West side of Ga. Highway 38, 15 miles southeast of Midway.	625,100 North 788,000 East
<u>JEFF DAVIS COUNTY</u>		
33.	At Hazelhurst.	680,100 North 370,300 East
<u>APPLING COUNTY</u>		
34.	North side of U. S. Highway 341, 7.5 miles southeast of Hazelhurst.	664,700 North 405,900 East
35.	South side of U. S. Highway 341, 4.0 miles southeast of Baxley.	637,100 North 463,600 East

Table 1 - (continued)

<u>Hole No.</u>	<u>Geographic Location</u>	<u>Georgia Coordinates, East Zone</u>
<u>WAYNE COUNTY</u>		
36.	South side of Ga. Highway 27, 3.8 miles west of Odum.	609,400 North 524,500 East
37.	North side of U. S. Highway 341, 2.0 miles northwest of Jesup.	592,000 North 582,000 East
38.	South side of U. S. Highway 341, 2.0 miles southeast of Jesup.	574,500 North 596,200 East
39.	West side of U. S. Highway 82, 4.0 miles northeast of Screven.	556,000 North 555,000 East
40.	5.0 miles north of Mount Pleasant off Ga. Highway 27, near Altamaha River.	547,400 North 658,000 East
41.	West side of County Road S-615, 1.8 miles south of Mount Pleasant.	513,200 North 650,200 East
<u>MCINTOSH COUNTY</u>		
42.	East side of Ga. Highway 25, 8.5 miles north of Eulonia	591,800 North 740,200 East
43.	North side of Ga. Highway 99 at Townsend	561,700 North 698,800 East
44.	West side of County Road S-1892, 0.5 mile north of intersection with Ga. Highway 99 in Crescent.	553,100 North 748,300 East
45.	East side of Ga. Highway 99, 10.0 miles northeast of Darien.	544,800 North 753,900 East
46.	East side of Ga. Highway 99, 4.5 miles northeast of Darien.	517,800 North 739,000 East
47.	West side of Ga. Highway 99, 0.8 mile northeast of Darien.	503,800 North 733,400 East
<u>BACON COUNTY</u>		
48.	East side of County Road S-1589, 3.9 miles north of intersection with Ga. Highway 32.	582,200 North 384,200 East

Table 1 - (continued)

<u>Hole No.</u>	<u>Geographic Location</u>	<u>Georgia Coordinates, East Zone</u>
<u>BACON COUNTY (Con't)</u>		
49.	South side of Ga. Highway 32, 2.8 miles east of Alma.	561,000 North 425,400 East
50.	North side of Ga. Highway 32, 9.5 miles southeast of Alma.	547,900 North 451,800 East
<u>PIERCE COUNTY</u>		
51.	South side of Ga. Highway 32, 0.2 mile south of Bristol.	524,100 North 486,000 East
52.	South side of Ga. Highway 32, 0.6 mile northwest of Patterson	504,700 North 506,100 East
<u>ATKINSON COUNTY</u>		
53.	Inside Pearson city limits near intersection U. S. Highways 82 and 441.	474,200 North 287,500 East
<u>WARE COUNTY</u>		
54.	North side of U. S. Highway 82, 6.0 miles northwest of Waycross city limit.	455,800 North 459,500 East
55.	North side of U. S. Highway 84, 3.7 miles southeast of Waycross city limit.	434,100 North 464,500 East
<u>BRANTLEY COUNTY</u>		
56.	North side of Ga. Highway 32, 1.2 miles from Pierce County line.	489,400 North 548,100 East
57.	North side of County Road S-1227, 1.2 miles west of intersection with U. S. Highway 301.	474,900 North 556,300 East
58.	East side of U. S. Highway 301, 0.8 mile north of intersection with County Road S-1227.	477,000 North 567,200 East

Table 1 - (continued)

<u>Hole No.</u>	<u>Geographic Location</u>	<u>Georgia Coordinates, East Zone</u>
<u>BRANTLEY COUNTY</u> (Cont'd)		
59.	On top of ridge on southwest side of Ga. Highway 32, 1.6 miles southeast of Browntown.	481,500 North 626,200 East
60.	North side of U. S. Highway 84, 0.6 mile west of intersection with U. S. Highway 301.	438,800 North 553,100 East
61.	South side of U. S. Highway 84, 5.9 miles east of intersection with U. S. Highway 301.	442,300 North 586,500 East
62.	North side of U. S. Highway 84 at Atkinson, 8.4 miles east of intersection with U. S. Highway 301.	444,800 North 598,400 East
63.	Sand pit, 25 feet north of U. S. Highway 84, 0.9 mile from Glynn County line.	448,500 North 622,200 East
64.	East side of U. S. Highway 301, 0.5 mile north of Charlton County line.	389,300 North 549,700 East
65.	South side of Ga. Highway 32, 50 yards from Glynn County line.	476,500 North 635,000 East
<u>GLYNN COUNTY</u>		
66.	10 feet south of Ga. Highway 32, 0.2 mile from Brantley County line.	475,500 North 636,800 East
67.	South side of Ga. Highway 32, 0.4 mile from Brantley County line.	474,100 North 639,500 East
68.	South side of Ga. Highway 32, 1.1 mile west of intersection with U. S. Highway 341.	463,300 North 683,900 East
69.	Ga. Highway 99, 2.4 miles west of intersection with Ga. Highway 25.	471,000 North 718,900 East
70.	Near Ga. Boys Estate off Ga. Highway 99, 9.0 miles northeast of Brunswick.	476,600 North 718,900 East

Table 1 - (continued)

<u>Hole No.</u>	<u>Geographic Location</u>	<u>Georgia Coordinates, East Zone</u>
<u>LANIER COUNTY</u>		
71.	North side of Ga. Highway 37, 2.4 miles east of intersection with U. S. Highway 129.	382,500 North 240,400 East
<u>CLINCH COUNTY</u>		
72.	South side of Ga. Highway 37, 0.6 mile west of intersection with Ga. Highway 38.	374,000 North 300,200 East
<u>CHARLTON COUNTY</u>		
73.	East side of Ga. Highway 252, 4.5 miles north of intersection with Ga. Highway 40.	321,000 North 561,900 East
74.	East side of Ga. Highway 23, 21.2 miles north of St. George.	292,100 North 543,900 East
75.	West side of U. S. Highway 301, 10.7 miles north of St. George.	245,300 North 531,400 East
76.	West side of Ga. Highway 23, 5.4 miles south of St. George.	165,200 North 529,900 East
<u>CAMDEN COUNTY</u>		
77.	Under tower on west side of County Road S-1850, 1.7 miles northeast of intersection with Ga. Highway 259.	388,700 North 601,200 East
78.	West side of Ga. Highway 252, 1.4 miles east of Charlton County line.	352,000 North 589,200 East
79.	South side of Ga. Highway 252, 2.8 miles east of Charlton County line.	353,900 North 594,800 East
80.	North side of Ga. Highway 40, 0.5 mile east of Kingsland city limit.	291,300 North 654,700 East

Previous Work

The following reports, presented chronologically, cover at least a portion of the coastal region of Georgia and seem significantly related to this heavy-mineral exploration.

Otton Veatch and L. W. Stephenson (1911) outlined the "Pleistocene" deposits of Georgia--roughly the limits of the area covered in this report.

Teax (1921) reported heavy-mineral concentrations on St. Simons and Sapelo Islands, especially between low- and high-tide marks at the south end of the islands. He also reported a concentration three miles west of St. George, Charlton County, on the Georgia and Florida Railway. This is near the holes drilled by the Southern Railway System (Addendum 2, this report).

C. W. Cooke (LaForge, Cooke, Keith, and Campbell, 1925) divided the Recent and Pleistocene coastal deposits into "terraces", broad flatlands of similar elevation. The west side of their Penholoway terrace is the approximate western limit of areas the authors found to contain a high percentage of heavy minerals.

J.H.C. Martens (1928) reported a concentration of heavy minerals one mile from the north end of Long Island near the crest of the beach ridge. Martens (1935) studied heavy-minerals from three localities in Georgia and sampled to depths of six inches to two feet.

C. W. Cooke (1939, 1943) and F. S. MacNeil (1947) mapped the geology of the study area and revised the geologic interpretation somewhat.

V. E. McKelvey and J. R. Balsley, Jr. (1948), mapped from an airplane the distribution of coastal black sands in North Carolina, South Carolina, and Georgia. The black sand diminishes in abundance northward, and

they are found only on beaches along the open ocean. The best concentrations are on the south end of islands. "Characteristically, the sands are concentrated on the back of the beach by storm waves and are generally best exposed just after a heavy storm." They mapped black sands along almost the entire length of open ocean beaches of Georgia.

F. S. MacNeil (1949) mapped a high terrace and four Pleistocene shorelines of Georgia and Florida.

John B. Mertie (1953, 1958) panned 13 samples from shallow depths in the southeastern part of the coastal region of Georgia. He reported that the greatest concentrations of heavy minerals in this area were about one percent, and these occur at a few places along the eastern margin of the Okefenokee Swamp.

The U. S. Geological Survey (1953) indicated in a very general manner radioactive anomalies along the Georgia and northeast Florida coast.

Geophysical work of practical application to heavy-mineral exploration is that of R. M. Moxham (1954), an airborne radioactivity survey in the Folkston area.

Sigmund J. Rosenfeld (1955) analyzed 130 auger and channel samples representing thicknesses up to five feet. His area covered roughly the northern half of the authors' area. He grouped limonite, which is likely secondary in many cases, with the other opaque minerals in his analyses; therefore, the authors could not compare titanium-mineral percentages with Rosenfeld. Also, Rosenfeld restricted his analyses to a fraction of the sand-size material.

Jesse A. Miller (1957) reported that titaniferous heavy-sand deposits have been observed near the southern end of Sapelo Island, at the

northern end of Long Island, and near the southern end of St. Simons Island. Also, heavy-mineral exploration was undertaken during early 1955 by several companies along the beaches and coastal plain "terraces."

Evelyn Z. Sinha's (1959) report includes maps of the geomorphic features and sediment types at the surface in the northern part of the coastal region of Georgia.

John A. Doering (1960) mapped the Quaternary surface formations of the southern part of the Atlantic Coastal Plain, and he discussed the stratigraphy and geologic history.

Stephen M. Herrick (1961, 1965) studied well cuttings and determined the thickness of the Pleistocene sediments in the coastal region of Georgia. Maximum thickness is about 65 feet on the east side. He divided these sediments into three lithologic units.

James Neiheisel (1962, 1965) studied in detail samples collected from holes to depths of 14 feet from the Altamaha and tributary rivers, Jekyll Island, Brunswick Harbor and vicinity, and the Silver Bluff and Pamlico shoreline areas in Pleistocene sands near the Altamaha River.

George I. Whitlatch (1962) discussed the possibility of heavy-mineral exploitation in Georgia and commented on several references.

Donn S. Gorsline (1963) reported on samples collected with a small Hayward Orange Peel Grab. Several of the samples were from the Georgia continental shelf. All heavy-mineral concentrations were less than one percent.

J. H. Hoyt and R. J. Weimer (1963) and R. J. Weimer and J. H. Hoyt (1964) compared features of the modern beach with the older inland beaches.

They recognized areas of shallow marine water by animal (Callianassa major) burrows.

Orrin H. Pilkey (1963) included in his work several shallow samples from the continental shelf off the Georgia coast. "The average concentration of heavy minerals in the South Atlantic shelf sediments is slightly less than 0.5 percent. No strong areal trend in these percentages was noted" (p. 643).

John H. Hoyt, Robert J. Weimer, and Vernon J. Henry, Jr. (1964), who studied the sediments of Sapelo Island and the nearby mainland, indicated the complexities involved in the formation of barrier islands. Their cross sections show that during the formation of barrier islands the tidal zone (thought to be a zone of heavy-mineral concentration) migrates vertically and horizontally; therefore, heavy-mineral concentrations may occur at many different positions beneath a barrier island.

Orrin H. Pilkey and Dirk Frankenberg (1964) delineated the boundary between relict, or Pleistocene, sediments and Recent sediments on the Georgia continental shelf.

Robert T. Giles and Orrin H. Pilkey (1965) included in their work the percentage of heavy minerals in the fine-grained fraction of several surface samples from Georgia dunes, beaches, and rivers. One of their significant observations corresponds with those of Dryden and Dryden (1956), Lincoln Dryden and G. A. Miller in Overstreet, Cupples and White (1956), Dryden (1958), and Neiheisel (1962, 1965). "Rivers deriving their load exclusively from Coastal Plain sediments are characterized by a stable heavy mineral suite. Sediments of rivers with headwaters extending into the Piedmont are characteristically mineralogically unstable" (Giles and Pilkey, 1965, p. 910).

Robert T. Giles (1966) made some general comparisons between heavy minerals of river, beach and dune sands of the southeastern Atlantic Coast.

John H. Hoyt and John R. Hails (1966) confirmed six Pleistocene shorelines in the coastal region of Georgia and attributed the prominent sand ridges to barrier island environments and the flat areas in-between as lagoonal salt-marsh flat environments.

John E. Husted, A. S. Furcron, and Frederick Bellinger (1966) included heavy-mineral data from four holes in Lanier County. Their highest concentration of heavy minerals was one percent.

The Minerals Engineering Group, Engineering Experiment Station, Georgia Institute of Technology and the Georgia Department of Mines, Mining and Geology (1966) included heavy-mineral data from 14 drill holes in Echols County. Their highest concentration was 1.8 percent.

Allan K. Temple (1966) studied the gradual alteration of ilmenite to rutile in the weathering environment. He found that in sand deposits the more weathered material is in and above the zone of the fluctuating water table, and that titanium-mineral concentrates are higher in titanium near the surface of the ground. A portion of his report on a drill hole from Folkston is as follows:

Footage	% TiO ₂ in Titanium Minerals
0-4	75.6
4-6	71.8
6-8	68.5
8-10	67.2
10-12	66.6

Temple found that for sand deposits in general the titanium content of the titanium-mineral concentrate varies depending on the relative age of the deposit. That found near present sea level contains less titanium than that at higher levels. These results of Temple are similar to those obtained by the authors of this report.

GEOLOGY

Sand similar to that mined for heavy minerals near Folkston, Georgia, and in North Florida occurs in a surface sheet of clastic sediments from out on the continental shelf to about 100 miles inland. These sediments are Pleistocene and Recent in age and consist predominantly of sand and sandy clay. This sand sheet is up to 60 feet thick along the coast and wedges out to the west.

Along the coast, there are barrier islands composed predominantly of Recent and Pleistocene sand. Inland, paralleling the coast, are several ridges about the size and shape of the present-day barrier island chain. The ridges are up to 50 miles long and 5 miles wide. Between the ridges are flatlands which are progressively higher inland. These ridges and flatlands are former barrier islands and lagoonal areas which developed during stages of sea-level stabilization during Pleistocene time.

Several major rivers run roughly perpendicular to the coast. Along these streams there are Recent clastic deposits up to a few miles across and up to several feet deep.

KNOWN DEPOSITS

Heavy-mineral sands have been mined in Northeast Florida for many years, primarily for their titanium minerals. Zircon and monazite are usually recovered also. In 1965, Humphreys Mining Company began mining similar deposits near Folkston, Georgia, about three miles from the Florida line (Figure 2). A few companies have sporadically prospected the coastal region, but little information has been made public. However, it is general knowledge among local citizens that deposits have been extensively drilled about six miles east of Woodbine, Camden County, six miles north of Brunswick, Glynn County, and on Cumberland and Jekyll Islands (Figure 2).



Figure 2. Map of coastal region of Georgia showing large areas of heavy-mineral concentrations (large X) and auger hole localities with greater than 2% heavy minerals (small x).

METHOD OF STUDY

Field Methods

The area of sand in Georgia showing possible similarity to those areas which have been mined in Florida and Georgia was determined from geologic maps and reports. This area of study is a strip of land about 100 miles wide adjacent to and paralleling the coast (Figure 1). Sampling traverses were drawn along east-west roads on topographic maps (1:250,000 scale) across the area. In general, a hole was augered about every 10 miles along the traverse, preferably at rarely found road cuts. In the absence of outcrops, areas which appeared sandy and dry (on higher ground) were chosen where the water table should be lower. Where augering below the water table the hole usually closes. Frequently, where no outcrops or dry, sandy areas could be found for several miles distance along the chosen traverse, a hole was augered in swampy land. A total of 80 holes was augered (Figure 2).

Sampling equipment consisted of a man-powered auger which made a hole about three inches in diameter, a drive-pipe sample, a tub in which to collect the samples, a shovel, and cloth sample bags large enough to hold about 50 pounds of sand. The stem of the auger was 3 feet long, and additional 3 foot sections of 3/4-inch pipe were added as drilling progressed so that holes up to 18 feet deep were made. Where there was a near-vertical face of sand exposed, a thin-walled steel pipe, 3 1/2 feet long, was driven with a sledge hammer to collect a sample, and then the pipe was shoveled free. The entire sample from a 3 foot interval, about 40-50 pounds for the auger and 15-20 pounds for the drive-pipe, was combined where practical. Where there was a major change in lithology, the sample was divided.

In addition to holes augered by the authors, Southern Railway System drilled 12 holes in Charlton County (Addendum 1), and a deep well was drilled in Effingham County (Addendum 2).

Laboratory Procedures

Determination of Heavy-Mineral Percentages

The sample was first spread on paper to dry in the open air. Clods were crushed with a wooden rolling pin, and the sample was mixed on a square sheet of oilcloth by alternately pulling the corners. A Jones Splitter was used to reduce the sample to about 100 grams, and then it was weighed accurately.

To determine the amount of clay and eliminate it, the sample was placed in a quart jar and water containing a clay dispersing agent (0.07 percent by weight of sodium pyrophosphate) was added until the jar was almost filled. The water and sample were then stirred and allowed to stand for two hours. According to Stokes Law, this is about the time required for spherical particles greater than clay size ($1/256$ mm.), having a specific gravity equal to quartz to settle 10 centimeters in water at room temperature. The top 10 centimeters of fluid was then vacuumed off through a tube, and this process was repeated until the water was clear. The remaining sample was collected on filter paper, air dried, and weighed. This weight subtracted from the original weight equals the clay content (Table 2).

To determine the percent of material greater than sand size (2 mm.), the sample was then passed through a U. S. Standard mesh screen No. 10 and weighed (Table 2).

The sand and silt size portion of the sample was separated into heavy and light fractions by placing the sample in a heavy-mineral separatory

funnel containing tetrabromoethane (specific gravity of about 2.96). The sample was stirred periodically until no mineral grains could be seen sinking from the lighter portion. After being washed and dried the lighter fraction was examined and approximate grain size and color were noted; thus, some idea of its possible use as glass sand, high silica sand, blasting sand, construction sand, and other uses could be determined (Table 2).

Determination of Titanium-Mineral
Percentages in Heavy-Mineral Fractions

The heavy-mineral fraction of most of the samples containing greater than one percent concentration was screened to +100, +200, and -200 U. S. Standard sieve sizes to give three fractions of about equal grain size. Each of the three fractions was spread on millimeter-ruled graph paper and observed through a binocular microscope. The total number of grains and the titanium-mineral grains (ilmenite-leucosene and rutile) were counted on random one-millimeter squares and a total of approximately 400 grains was tabulated for each size fraction. The size fractions were then weighed and an estimated weight percentage of titanium minerals in the heavy-mineral fraction was calculated (Table 3).

TABLE 2

PHYSICAL PROPERTIES OF SAMPLES

Percent clay, percent greater than sand size, color and average estimated grain size of light-weight portion of sand and silt fraction, and percent heavy minerals in sand and silt fraction.

Hole Number	Sampled Interval In Feet	% Clay Size	% +2 mm.	LIGHT-WEIGHT PORTION		% Heavy Minerals
				Estimated Color	Average Estimated Grain Size	
1	0-3	3.6	0.0	White	Med.	0.1
	3-6	2.6	0.0	White	Med.	0.2
	6-9	1.4	0.0	White	Med.	0.2
	9-11	2.0	0.0	White	Med.	0.3
2	0-3	20.0	1.3	Tan	Fine	0.6
	3-6	24.8	1.4	Red-Brn.	Med.	1.8
3	0-3	10.0	0.0	White	Fine	0.7
	3-6	24.5	0.3	Tan	Fine	0.6
4	0-3	7.0	0.0	Tan	Coarse	0.3
	3-6	9.1	0.4	White	Coarse	0.4
	6-9	19.0	1.1	Tan	Med.	0.3
5	0-3	11.5	0.0	White	Fine	0.7
	3-6 $\frac{1}{2}$	3.8	0.0	Dk. Brn.	Coarse	0.7
6	0-3	6.4	0.0	White	Med.	0.3
	3-6	24.3	0.0	White	Med.	0.3
	6-9	23.9	Trace	White	Med.	0.6
7	0-3	5.6	0.0	White	Fine	0.6
	3-6	20.2	0.0	Tan	Med.	0.6
	6-9	21.6	1.6	Tan	Coarse	0.5
8	0-3	12.7	0.7	White	Fine	0.6
9	0-3	7.8	0.0	White	Med.	0.3
	3-6	11.7	0.2	Tan	Med.	0.1
10	0-3	2.4	0.0	White	Med.	0.2
	3-6	1.9	0.0	White	Med.	0.2
	6-9	1.2	0.0	White	Med.	0.2
	9-12	1.4	0.0	Tan	Med.	0.2
	12-15	2.5	0.0	White	Med. to Coarse	0.2
	15-18	2.5	0.0	Tan	Med.	0.2

Table 2 - (continued)

Hole Number	Sampled Interval In Feet	% Clay Size	% +2 mm.	LIGHT-WEIGHT PORTION		% Heavy Minerals
				Estimated Color	Average Estimated Grain Size	
11	0-3	20.0	0.0	Tan	Med.	0.4
	3-6	35.0	0.0	Dk.Tan	Med.	0.6
12	0-3	4.2	0.0	White	Fine	0.7
	3-6	6.7	0.0	White	Fine	0.6
	6-9	24.6	0.0	White	Fine	0.6
	9-12	17.5	0.0	White	Very Fine	1.1
	12-15	2.6	0.0	White	Very Fine	1.2
	15-18	5.8	0.0	White	Fine	0.7
13	0-3	22.3	0.2	Tan	Med.	0.4
	3-6	19.6	0.7	White	Med.	0.4
14	0-3	4.4	0.0	White	Fine	0.8
	3-6	8.9	Trace	White	Fine	0.8
	6-9	34.9	0.0	White	Fine	1.1
15	0-3	7.1	0.0	White	Fine	1.5
16	0-3½	18.6	1.9	Gray	Very Fine	0.4
17	0-3	15.1	0.0	White	Very Fine	1.5
	3-6	33.0	0.0	Tan	Fine	1.1
	6-7	27.8	0.0	White	Fine to Very Fine)	1.0
18	0-3	8.7	0.0	White	Fine	0.8
	3-6	4.9	0.0	White	Fine	0.8
	6-9	2.5	0.0	Tan	Fine	1.6
19	0-3	3.7	0.0	Tan	Coarse	0.5
	3-6	1.7	0.0	White	Coarse	0.5
	6-9	0.7	0.0	Tan	Coarse	0.5
	9-12	0.8	0.0	Tan	Med.	0.4
	12-15	1.4	0.0	Tan	Med.	0.4
	15-18	1.6	0.0	Tan	Med.	0.4
20	0-3	9.2	0.0	White	Fine	1.6
	3-6	18.0	0.0	White	Fine to Very Fine)	1.9
	6-9	32.5	0.0	Tan	Fine	1.0
21	0-3	5.7	0.0	White	Fine	1.6
	3-6	1.2	0.0	Dk.Tan	Fine	1.8

Table 2 - (continued)

26

Hole Number	Sampled Interval In Feet	% Clay Size	% +2 mm.	LIGHT-WEIGHT PORTION		% Heavy Minerals
				Estimated Color	Average Estimated Grain Size	
22	0-3	1.2	0.0	Lt. Brn.	Fine	3.5
	3-6	0.8	0.0	Tan	Fine	2.6
	6-9	0.0	0.0	White to Tan	Fine	2.5
	9-12	0.9	0.0	Tan	Fine	2.7
23	0-3	5.5	0.0	White	Med.	0.4
	3-6	12.7	Trace	White	Med.	0.4
24	0-3	7.3	0.0	White	Fine	2.5
25	0-3	6.6	0.8	White	Fine	0.4
	3-6	14.9	4.1	White	Coarse	0.3
26	0-3	3.7	0.0	White	Fine	0.3
	3-6	4.8	0.0	White	Med.	0.3
	6-9	3.8	0.0	White	Med.	0.3
	9-12	2.5	0.0	White	Med.	0.3
	12-15	8.1	0.0	White	Med.	0.4
27	0-3	16.3	1.0	White to Tan	Med.	0.3
	3-6	30.6	0.6	Tan	Med.	0.4
28	0-3	4.5	0.4	White	Fine	0.8
	3-6	7.8	1.1	White	Med.	1.0
	6-9	20.2	0.0	White	Fine	0.9
29	0-3	16.4	0.8	White	Fine	0.3
	3-6½	30.4	1.0	Tan	Med.	0.3
30	0-3	4.2	0.2	Tan	Fine	1.6
	3-6	8.4	0.0	White	Fine	1.8
	6-9	18.9	0.0	White	Fine	1.8
	9-11	13.3	7.1	White	Med.	1.0
31	0-3	13.5	0.0	White	Fine	1.6
	3-5½	23.1	0.0	White	Fine	1.2
32	0-3	5.3	2.6	Tan	Fine	2.1
	3-6	12.0	0.0	White	Fine	2.5
33	0-3	9.9	0.7	White	Fine	0.5
	3-6	26.4	1.4	Tan	Coarse	0.5

Table 2 - (continued)

Hole Number	Sampled Interval In Feet	% Clay Size	% +2 mm.	LIGHT-WEIGHT PORTION		% Heavy Minerals
				Estimated Color	Average Estimated Grain Size	
34	0-3	11.4	1.4	Tan	Coarse	0.3
35	0-3	12.0	0.0	White	Fine	0.5
	3-6	22.8	0.0	Tan	Fine	0.3
36	0-3	14.5	2.6	Tan	Med.	0.4
37	0-3	4.6	0.0	Tan	Med.	0.6
	3-6	0.9	0.0	White	Med.	0.5
	6-9	3.4	0.0	White	Fine	0.8
	9-12	6.5	Trace	White	Fine	0.8
38	0-3	3.9	0.0	White	Med.	0.2
	3-6	13.9	0.0	Tan	Coarse	0.2
	6-9	13.7	1.6	Lt.Tan	Coarse	0.2
39	0-3	9.0	Trace	White	Med.	1.9
	3-7	20.9	0.9	Tan	Coarse	1.0
40	0-3	9.1	0.0	White	Fine	1.2
	3-6	38.6	0.0	White	Fine	1.1
	6-9	19.8	Trace	White	Med.	0.2
	9-12	19.8	0.0	White	Very Fine	0.7
41	0-3	5.1	0.0	White	Coarse	1.6
	3-6	4.8	0.0	White	Fine	1.6
42	0-3	8.6	0.0	White	Fine	0.8
	3-6	9.1	0.0	White	Fine	1.0
43	0-3	22.9	0.0	White	Fine	0.9
	3-6	42.6	0.0	Red-Brn.	Fine	1.2
44	0-3	4.8	0.0	White	Fine	1.4
45	0-3	5.0	0.0	Tan	Med.	0.9
	3-6	4.5	0.0	Dk.Brn.	Fine	0.4
46	0-3	4.1	0.0	White	Fine	2.0
	3-6	2.4	0.0	White	Fine	2.2
47	0-3	5.0	0.0	White	Fine	1.5
	3-6	3.4	0.0	White	Fine	1.7

Table 2 - (continued)

28

Hole Number	Sampled Interval In Feet	% Clay Size	% +2 mm.	LIGHT-WEIGHT PORTION		% Heavy Minerals
				Estimated Color	Average Estimated Grain Size	
48	0-3	5.5	0.4	Gray	Med.	0.5
	3-6	19.6	1.0	Tan	Coarse	0.4
	6-9	17.3	2.0	Tan	Coarse	0.3
	9-12	24.2	4.0	Tan	Coarse	0.2
	12-14	28.6	5.2	White	Coarse	0.4
49	0-3	7.5	Trace	White	Med.	0.3
	3-6	29.8	0.0	Tan	Med.	0.3
	6-9	24.5	0.7	Tan	Coarse	0.3
	9-12	18.0	3.4	Tan	Med.	0.3
50	0-3	3.9	0.3	White	Fine to Med.)	0.3
	3-6	8.6	0.6	White	Med.	0.3
51	0-2½	7.0	0.3	White	Med. to Fine)	0.4
52	0-1	2.9	0.0	White	Med.	0.4
53	0-3	4.7	1.2	Gray	Med.	0.5
54	0-3	11.4	3.8	White	Med.	0.7
	3-6	27.5	1.1	Tan	Coarse	0.7
	6-9	21.4	1.4	Tan	Coarse	0.5
	9-12	17.6	1.5	White	Coarse	0.3
55	0-3	4.4	0.0	White	Med.	0.7
	3-6	30.0	0.0	Tan	Med.	0.8
	6-9	24.8	Trace	Tan	Med.	0.7
56	0-3	3.2	0.0	Gray	Med.	0.3
	3-5	2.8	0.0	White	Med.	0.4
57	0-3	10.4	0.0	White	Fine	0.6
	3-4	21.7	0.0	White	Fine	0.3
	4-6	34.8	0.0	White	Fine	1.2
	6-9	23.9	0.0	Lt.Tan	Fine	1.2
	9-12	32.4	0.0	Lt.Tan	Fine	1.9
	12-15	52.3	0.0	Tan	Fine	5.8
58	0-2	8.5	0.0	White	Med.	0.5
	2-4	14.9	0.0	White	Med.	0.7
	4-5	10.9	0.0	White	Coarse	0.2
	5-7	4.1	Trace	White	Med.	0.5
	7-10	1.0	1.0	White	Coarse	0.3

Table 2 - (continued)

Hole Number	Sampled Interval In Feet	% Clay Size	% +2 mm.	LIGHT-WEIGHT PORTION		% Heavy Minerals
				Estimated Color	Average Estimated Grain Size	
59	0-3	4.5	0.0	White	Fine	0.7
	3-6	3.3	Trace	White	Med.	0.7
	6-9	23.3	Trace	White	Fine	0.3
	9-12	22.0	0.0	White	Fine	0.6
	12-15	27.8	0.0	White	Fine	1.1
	15-16 $\frac{1}{2}$	22.3	0.0	White	Fine	1.1
	16 $\frac{1}{2}$ -18	6.7	0.0	White	Med.	0.6
60	0-3	5.9	0.0	Gray	Med.	1.0
	3-4	11.2	0.0	White	Med.	0.9
61	0-3	6.0	0.0	White	Med.	0.6
	3-6	4.3	0.0	White	Med.	0.6
	6-9	2.5	0.0	White	Med.	0.4
	9-12	6.3	0.2	White	Med.	0.5
	12-15	3.0	0.2	Tan	Med.	0.6
	15-17	1.8	0.3	Dk.Brn.	Med.	1.1
62	0-3	4.6	0.0	White	Fine	0.4
63	0-3	4.0	0.0	White	Med.	0.4
	3-6	8.9	0.0	White	Med.	0.4
	6-9	25.8	Trace	White	Med.	0.3
	9-12	31.1	0.2	Tan	Fine	0.5
64	0-3	2.1	0.0	White	Fine	1.0
65	0-3	4.8	0.0	White	Med.	0.5
	3-6	3.3	0.0	White	Med.	0.5
	6-9	2.6	0.0	White	Med.	0.5
	9-12	2.4	0.0	White	Fine	0.5
	12-15	9.2	0.0	White	Med.	0.9
66	0-3	2.8	0.0	White	Med.	0.4
	3-6	3.5	0.0	White	Med.	0.4
	6-9	2.3	0.0	White	Med.	0.4
	9-12	1.3	0.0	White	Med.	0.5
	12-13	1.6	0.0	White	Med.	0.5
	13-15	1.6	0.0	White	Med.	0.8
67	0-3	4.5	0.0	Tan	Med.	0.5
	3-5	6.8	0.0	White	Coarse	0.3
68	0-3	16.2	0.0	White	Fine	0.7
	3-6	32.2	0.0	White	Fine	1.2
	6-9	22.6	0.0	White	Fine	1.3
	9-12	34.2	0.0	White	Fine	1.5
	12-14	46.5	0.0	White	Fine	1.6

Table 2 - (continued)

Hole Number	Sampled Interval In Feet	% Clay Size	% +2 mm.	LIGHT-WEIGHT PORTION		% Heavy Minerals
				Estimated Color	Average Estimated Grain Size	
69	0-3	2.4	0.0	White	Med.	3.3
70	0-3	4.9	Trace	Tan	Fine	1.2
	3-6	2.5	0.0	Tan	Fine	1.0
	6-9	1.6	0.0	White	Very Fine	0.8
71	0-3	5.5	0.3	White	Med.	0.5
	3-6	20.8	0.7	Tan	Coarse	0.3
	6-9	18.4	0.3	White	Coarse	0.2
	9-12	20.2	0.3	White	Coarse	0.3
	12-15	18.1	0.6	White	Med.	0.3
	15-17 $\frac{1}{2}$	21.7	Trace	White	Med.	0.4
	17 $\frac{1}{2}$ -18	43.6	0.0	White	Fine	0.3
72	0-3	3.8	0.0	White	Med.	0.4
	3-4	3.2	0.0	White	Fine	0.4
73	0-2	10.2	0.0	Gray	Fine	2.8
	2-4	3.4	0.0	Gray	Fine	2.9
	4-6	5.3	0.0	Gray	Fine	2.8
	6-8	6.4	0.0	White	Fine	4.1
74	0-3	2.8	0.0	White	Med.	0.6
	3-6	3.0	0.0	White	Fine	0.5
	6-9	1.5	0.0	White	Fine	0.5
	9-12	2.0	0.0	White	Fine	0.4
75	0-3	3.3	0.0	White	Med.	0.7
	3-6	20.3	0.0	Tan	Fine	1.0
76	0-3	2.9	0.0	White	Med.	1.0
	3-6	2.1	0.0	White	Med.	1.0
77	0-3	4.1	0.8	White	Coarse	0.4
78	0-3	4.7	0.0	White	Med.	0.7
	3-6	6.6	0.0	White	Med.	0.8
79	0-3	3.4	0.0	White	Med.	0.8
	3-6	2.5	0.0	White	Fine	0.8
	6-8 $\frac{1}{2}$	5.0	0.0	White	Med.	0.7
80	0-3	5.3	0.3	White	Fine	6.0

TABLE 3

MINERAL PERCENTAGES
OF SELECTED SAMPLES

Percent heavy minerals in sand and silt fraction;
percent titanium minerals, percent zircon and percent
monazite in heavy-mineral fraction of samples selected
for heavy-mineral concentrations of one percent or
greater. Determinations are in weight percent.

Hole Number	Sampled Interval In Feet	% Heavy Minerals	% Titanium Minerals	% Zircon	% Monazite
1	0-3	0.1	51.7		
	6-9	0.2	50.4		
2	0-3	0.6			0.2
	3-6	1.8			0.5
10	0-3	0.2	50.8		
	6-9	0.2	51.8		
	12-15	0.2	53.8		
12	0-3	0.7	56.2		
	9-12	1.1	62.6		
	15-18	0.7	61.3		
15	0-3	1.5	55.9	14.7	0.6
17	0-3	1.5	58.8	12.1	1.3
	3-6	1.1			1.7
	6-7	1.0			2.1
18	0-3	0.8	42.9	6.2	1.4
	3-6	0.8	38.6	6.8	1.0
	6-9	1.6	43.5	4.2	0.7
19	0-3	0.5	56.2		
	6-9	0.5	56.7		
	12-15	0.4	57.4		
	15-18	0.4	54.4		
20	0-3	1.6	48.4	8.9	0.7
	3-6	1.9	55.6	8.6	1.1
	6-9	1.0			

Table 3 - (continued)

Hole Number	Sampled Interval In Feet	% Heavy Minerals	% Titanium Minerals	% Zircon	% Monazite
21	0-3	1.6	46.4	7.6	1.6
	3-6	1.8	43.5	3.1	0.7
22	0-3	3.5	39.4	1.5	0.4
	3-6	2.6	45.9	1.5	0.5
	6-9	2.5	38.7	2.1	0.2
	9-12	2.7	42.7	2.5	0.4
24	0-3	2.5	54.3	13.4	0.7
30	0-3	1.6	34.3	6.2	0.9
	3-6	1.8	39.4	4.5	0.5
	6-9	1.8	41.5	7.0	1.5
	9-11	1.0	46.6	7.5	2.2
31	0-3	1.6	48.0	7.4	1.5
	3-5 $\frac{1}{2}$	1.2	50.3	6.3	2.1
32	0-3	2.1	58.1	10.3	1.6
	3-6	2.5	51.3	9.0	1.5
39	0-3	1.9	44.5	7.6	1.2
	3-7	1.0			2.1
40	0-3	1.2	56.2	14.0	2.5
	3-6	1.1			3.0
	6-9	0.2			
	9-12	0.7			
41	0-3	1.6	58.5	14.1	2.5
	3-6	1.6	66.2	14.9	2.1
44	0-3	1.4	58.5	9.8	1.2
46	0-3	2.0	62.7	10.9	1.6
	3-6	2.2	62.8	12.6	1.1
47	0-3	1.5	62.7	8.9	1.3
	3-6	1.7	64.5	8.6	1.4
48	0-3	0.5	46.3		
	6-9	0.3	45.0		
	12-14	0.4	64.8		
54	0-3	0.7	44.6		
	3-6	0.7	42.1		
	9-12	0.3	59.4		

Table 3 - (continued)

Hole Number	Sampled Interval In Feet	% Heavy Minerals	% Titanium Minerals	% Zircon	% Monazite
57	0-3	0.6			
	3-4	0.3			
	4-6	1.2			3.2
	6-9	1.2			1.0
	9-12	1.9			0.9
	12-15	5.8			0.1
58	0-2	0.5	53.8		
	4-5	0.2	60.6		
	7-10	0.3	59.0		
60	0-3	1.0	56.5	17.1	1.5
	3-4	0.9	54.0	17.1	1.6
61	0-3	0.6	54.3		
	6-9	0.4	55.1		
	12-15	0.6	43.4		
64	0-3	1.0	50.1	3.9	3.0
66	0-3	0.4	54.9		
	6-9	0.4	60.1		
	13-15	0.8	63.7		
68	0-3	0.7	54.1	9.8	1.0
	3-6	1.2	57.6	10.6	2.3
	6-9	1.3	62.3	10.6	1.3
	9-12	1.5	45.0	10.9	1.3
	12-14	1.6	47.1	8.5	1.3
69	0-3	3.3	59.3	12.0	1.2
70	0-3	1.2	60.4	6.7	0.4
	3-6	1.0	51.1	5.7	1.0
	6-9	0.8	45.0	3.1	0.8
71	0-3	0.5	40.1		
	6-9	0.2	59.1		
	12-15	0.3	54.3		
73	0-2	2.8	62.9	7.4	1.2
	2-4	2.9	53.8	15.7	1.1
	4-6	2.8	61.2	15.7	1.2
	6-8	4.1	58.6	12.9	1.3

Table 3 - (continued)

34

Hole Number	Sampled Interval In Feet	% Heavy Minerals	% Titanium Minerals	% Zircon	% Monazite
76	0-3	1.0	44.1	4.8	0.0
	3-6	1.0	47.2	4.5	0.0
80	0-3	6.0	57.0	4.2	1.2

Chemical Analyses of the Heavy-Mineral Fractions

The entire sample of heavy minerals from the tetrabromoethane separation was ground for analysis by an electric mortar grinder using an agate mortar and pestle. The powdered sample was dried overnight at 103° to 105° C.

Titanium Dioxide - TiO_2 (Furman, 1962) (Sandell, 1944).

The titanium dioxide percentage (Table 4) in the heavy-mineral fraction was determined colorimetrically by the hydrogen peroxide method. A 0.1000 gram sample was fused with potassium pyrosulfate, and the melt was dissolved in five percent sulfuric acid and made up to 1,000 milliliters. A portion of the solution not treated with peroxide was used as a blank. Hydrogen peroxide was added to the solution, and the optical density was measured on a Coleman Junior spectrophotometer set at a wavelength of 420 millimicrons. The optical density of the peroxidized titanium solution was corrected for the blank, and the percent titanium dioxide was read from a standard curve.

The color of the peroxidized titanium solution was bleached with hydrofluoric acid, and interference from vanadium was not noted by visual observation.

Values obtained for duplicate samples were reproducible to within two percent, and runs on a standard prepared in the laboratory were within two percent of the standard value.

Zirconium Dioxide - ZrO_2 and Zircon - $ZrSiO_4$ (Furman, 1962)
(Hill and Miles, 1959).

Zirconium dioxide (Table 4) was determined by the mandelic method.

A 0.2000 gram sample was fused with anhydrous sodium carbonate and the melt dissolved in sulfuric acid (1+3). Three milliliters of 30 percent hydrogen peroxide was added and the solution evaporated to fumes of sulfur trioxide. The diluted solution was made alkaline with ammonium hydroxide, and the precipitated hydroxides were filtered to separate sulfate.

The hydroxide precipitate was dissolved in hydrochloric acid (1+3), and zirconium was precipitated as zirconium mandelate with 16 percent mandelic acid. The precipitate was filtered and washed with ammonium hydroxide (1+4) to dissolve zirconium mandelate and separate any titanium. The solution was made acid with hydrochloric acid and zirconium reprecipitated with mandelic acid.

The zirconium mandelate precipitate was ignited for one hour at 900° C. and weighed as ZrO_2 . The percent zircon ($ZrSiO_4$) was found by multiplying the percent ZrO_2 by 1.4874.

Values obtained for duplicate samples were reproducible to within two percent, and runs on a standard prepared in the laboratory were within two percent of the standard value.

Radiometric Monazite Analysis (by Milton E. McLain and Dorsey Smith of the Georgia Institute of Technology.)

A radiometric method was used to determine monazite content of the heavy-mineral fraction (Table 3). Since monazite is the only thorium-radioactive mineral known to occur in the sands of the coastal region of Georgia in appreciable amounts, known percentages of pure monazite concentrate from North Florida were mixed with an ilmenite concentrate as standards, and the thorium radioactivity of these standards was compared to the thorium radioactivity of the heavy-mineral-fraction samples. Specifically, a standard curve was

prepared by weighing known amounts of monazite concentrate mixed with several volumes of ilmenite concentrate in 25 cc. glass vials. These mixtures were counted for 40 minutes on the cap of the NaI crystal of a Technical Measurement Corporation analyzer. Counts were integrated under the .2386 mev. thorium peak. The standard curve was drawn by plotting milligrams of monazite versus integrated counts minus the base line.

The unknown heavy-mineral samples were analyzed in the same manner and compared to the standard curve, and the percent monazite was calculated.

A uranium source was used to check the uranium content of the samples. None was detected.

TABLE 4

CHEMICAL ANALYSES
RESULTS ON HEAVY-MINERAL
CONCENTRATES

Percent titanium dioxide in sand and silt fraction,
in heavy minerals, and in titanium minerals. Percent
zirconium dioxide in sand and silt fraction and in heavy
minerals. Determinations are in weight percent.

Hole Number	Sampled Interval In Feet	% TiO ₂ in Sand and Silt Fraction	% TiO ₂ in Heavy ₂ Minerals	% TiO ₂ in Titanium Minerals	% ZrO ₂ in Sand and Silt Fraction	% ZrO ₂ in Heavy ₂ Minerals
1	0-3		26.6	51.5		
	6-9		27.8	55.2		
10	0-3		28.2	55.6		
	6-9		27.8	53.7		
	12-15		28.2	52.4		
12	0-3		33.0	58.7		
	9-12		35.8	57.2		
	15-18		33.0	53.8		
15	0-3	0.56	37.0	66.2	0.15	9.8
17	0-3	0.46	30.6	52.0	0.12	8.1
18	0-3	0.19	24.2	56.4	0.03	4.0
	3-6	0.15	19.2	49.7	0.04	4.6
	6-9	0.36	22.8	52.4	0.04	2.8
19	0-3		32.0	57.0		
	6-9		32.0	56.5		
	12-15		30.8	53.7		
	15-18		30.8	56.7		
20	0-3	0.53	32.8	67.8	0.10	6.0
	3-6	0.62	32.8	64.8	0.11	5.8
21	0-3	0.40	25.0	53.9	0.08	5.1
	3-6	0.35	18.6	42.8	0.04	2.1
22	0-3	0.60	17.2	43.6	0.04	1.0
	3-6	0.43	16.4	35.7	0.03	1.0
	6-9	0.38	15.0	38.8	0.04	1.4
	9-12	0.50	18.6	43.6	0.04	1.6

Table 4 - (continued)

Hole Number	Sampled Interval In Feet	% TiO ₂ in Sand and Silt Fraction	% TiO ₂ in Heavy Minerals	% TiO ₂ in Titanium Minerals	% ZrO ₂ in Sand and Silt Fraction	% ZrO ₂ in Heavy Minerals
24	0-3	0.91	36.4	67.0	0.22	9.0
30	0-3	0.36	22.2	65.0	0.07	4.2
	3-6	0.41	22.8	57.9	0.05	3.0
	6-9	0.50	27.9	62.7	0.08	4.7
	9-11	0.28	27.9	59.9	0.05	5.0
31	0-3	0.45	27.9	58.2	0.10	5.0
	3-5½	0.36	30.2	60.0	0.05	4.2
32	0-3	0.73	34.8	59.9	0.14	6.9
	3-6	0.68	27.0	52.6	0.15	6.0
39	0-3	0.57	30.1	67.6	0.10	5.1
40	0-3	0.43	35.6	63.4	0.11	9.4
41	0-3	0.63	39.2	67.0	0.15	9.5
	3-6	0.60	37.8	60.7	0.16	10.0
44	0-3	0.53	37.8	64.6	0.10	6.6
46	0-3	0.81	40.6	64.6	0.15	7.4
	3-6	0.88	40.2	64.0	0.19	8.5
47	0-3	0.57	37.8	60.4	0.10	6.0
	3-6	0.64	37.8	58.6	0.10	5.8
48	0-3		37.9	81.9		
	6-9		31.0	68.9		
	12-14		35.2	54.3		
54	0-3		28.8	64.6		
	3-6		26.6	63.2		
	9-12		35.8	60.3		
58	0-2		35.6	66.2		
	4-5		35.0	57.7		
	7-10		35.0	59.4		
60	0-3	0.35	35.0	62.0	0.12	11.5
	3-4	0.33	37.0	68.5	0.10	11.5

Table 4 - (continued)

40

Hole Number	Sampled Interval In Feet	% TiO ₂ in Sand and Silt Fraction	% TiO ₂ in Heavy ₂ Minerals	% TiO ₂ in Titanium Minerals	% ZrO ₂ in Sand and Silt Fraction	% ZrO ₂ in Heavy ₂ Minerals
61	0-3 6-9 12-15		31.0 28.2 20.8	57.1 51.2 48.0		
64	0-3	0.32	32.0	63.9	0.03	2.6
66	0-3 6-9 13-15		35.0 35.6 35.0	63.8 59.2 55.0		
68	0-3 3-6 6-9 9-12 12-14	0.26 0.44 0.49 0.50 0.49	37.4 36.8 37.4 28.0 30.6	69.1 63.9 60.0 74.7 64.9	0.05 0.08 0.09 0.11 0.09	6.6 7.1 7.2 7.4 5.7
69	0-3	1.22	37.0	62.4	0.26	8.0
70	0-3 3-6 6-9	0.39 0.31 0.18	32.8 31.0 22.0	54.3 60.8 48.9	0.05 0.04 0.02	4.5 3.8 2.1
71	0-3 6-9 12-15		34.2 35.4 28.2	85.4 59.9 52.0		
73	0-2 2-4 4-6 6-8	1.12 1.14 1.05 1.26	40.0 39.2 37.0 30.7	63.6 72.8 60.5 52.4	0.14 0.31 0.30 0.35	5.0 10.6 10.6 8.6
76	0-3 3-6	0.32 0.32	32.0 32.0	72.5 67.8	0.03 0.03	3.2 3.0
80	0-3	2.10	35.0	61.4	0.17	2.8

CONCLUSIONS

One area of heavy-mineral-bearing sand is presently being mined in Georgia near Folkston. There are at least four other large areas where there are known concentrations of heavy minerals (Figure 2). Elsewhere, five of our auger holes (Figure 2, Nos. 22, 24, 32, 45, and 80) were found to contain intervals of between two to six percent heavy minerals. To be profitably mineable, a deposit will probably have to contain at least three percent heavy minerals and one percent TiO_2 . The deposit should be several feet thick and within a few feet of the surface of the ground. There was no concentration greater than one percent heavy minerals west of Trail Ridge and the approximate 125-foot contour which runs north-south and divides the studied area about in half (Figure 2). Higher percentages of heavy minerals occur near the shoreline areas of MacNeil (1949).

The major heavy mineral mined in South Georgia and North Florida is ilmenite and its alteration products. The other minerals recovered are by-products. The titanium-mineral concentrates vary greatly in their iron content. That with a low iron content and consequent high titanium content is less expensively processed to a titanium dioxide product. It is presently desirable for the ilmenite-leucoxene concentrate to contain greater than 60 percent titanium dioxide, and those with about 70 percent are very desirable.

From the few titanium analyses (Table 3) it appears that the titanium minerals with less iron are found furthest west and near the surface of the ground. The lower iron content is probably due to leaching by ground water.

Previous workers have shown that the more recently deposited sands along the coast and along the Altamaha and Savannah Rivers, with extensive head

waters in the crystalline rocks to the west, are less leached of certain minerals by percolating ground water. These areas probably contain ilmenite with a high iron content.

Concentrations of heavy minerals are more often found in fine-grained sand (Table 2).

SUGGESTIONS TO FUTURE WORKERS

Holes should be drilled to a depth of 50 feet to fully explore heavy-mineral deposits which may be mined in the near future. The deposits in North Florida are mined to about this depth. Use of a jet-rotary-type drill as described by Thoenen and Warne (1949) or the drive-pipe-jet rig presently used by Humphreys Mining Company at Folkston is suggested.

After checking the areas shown in this report to have a concentration of titanium minerals with a low iron content (Figure 2, localities 24, 45, 80), further exploration should probably begin at about the 125-foot contour and progress southeastward, excluding from the search the Recent sediments along the Altamaha River System and Savannah River. The shoreline areas of MacNeil (1949) should especially be checked.

There are indirect approaches to searching for heavy minerals which have not been thoroughly tested. Systematic surveys using a portable instrument to measure thorium radioactivity may outline areas of monazite concentration. Detailed ground magnetic maps may show concentrations of ilmenite.

Laboratory techniques can probably be expedited by centrifuging the heavy-liquid-sample mixture as described by Spencer (1948) and by applying x-ray diffraction and fluorescence and spectrographic techniques of analysis.

ADDENDUM 1

WELLS DRILLED BY SOUTHERN RAILWAY SYSTEM IN CHARLTON COUNTY

Part of the phosphate exploration by Southern Railway System in 1964 resulted in the drilling of 12 holes on Trail Ridge in Charlton County, Georgia (Figure 3) (Olson, 1966). This area is approximately 25 miles north of the heavy-mineral mining on Trail Ridge in Florida. Samples from the Southern Railway System drilling were made available to the authors for heavy-mineral analysis. Although these samples were not completely representative because they were washed up the hole and caught on a wire-screen strainer, thereby losing the fines and slimes, they are of value, for they penetrated much deeper than the authors were able to auger by hand.

The samples were processed and analyzed in the same manner as the other samples in the main part of this report to give percent heavy minerals in the sand and silt fraction, percent clay, and percent greater than sand size. The results are in Table 5. Holes 4 and 11 are the only ones containing an interval of greater than 2 percent heavy minerals within 30 feet of the surface of the ground.

Hole four (4) was selected at random and mineralogical and chemical tests like those described in the main part of this report were run on the heavy mineral fractions at several depth intervals. The following results were obtained:

HOLE 4

Sampled Interval In Feet	% Titanium Minerals In Heavy Minerals	% TiO ₂ In Heavy Minerals	% TiO ₂ In Titanium Minerals
0-5	54.8	33.2	60.6
10-15	59.2	32.0	54.1
20-25	57.2	26.0	45.5
40-45	57.2	24.6	43.0
50-60	59.4	26.6	44.8

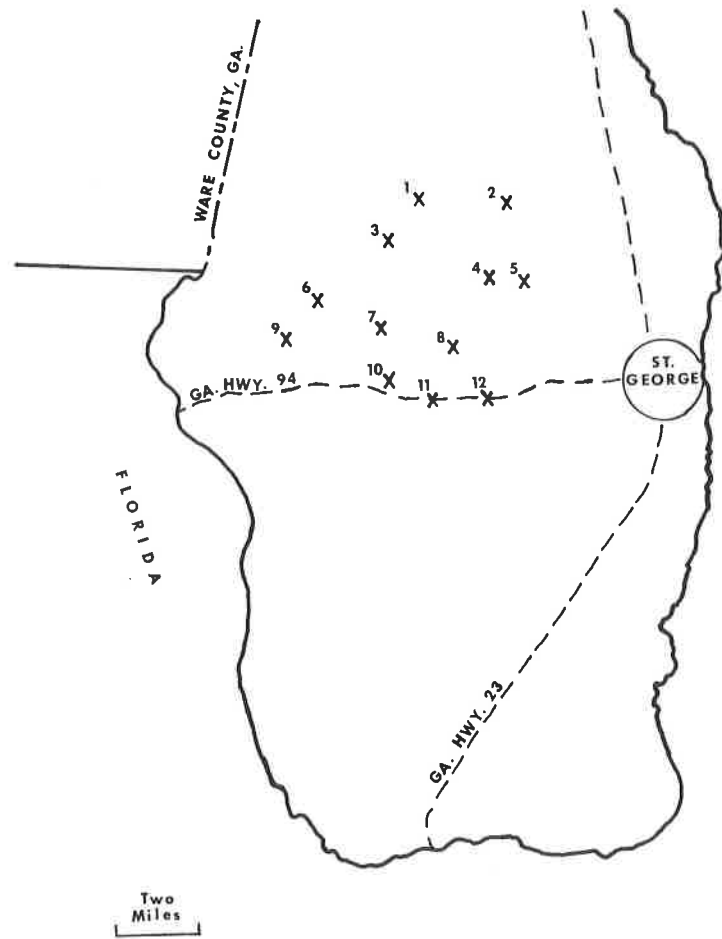


Figure 3. Map of southern part of Charlton County, Georgia, showing locations of holes drilled by Southern Railway System

TABLE 5

PERCENTAGES OF HEAVY MINERALS AND CLASTIC
SIZES FROM HOLES DRILLED ON TRAIL RIDGE BY
SOUTHERN RAILWAY SYSTEM

Hole Number (Figure 3)	Sampled Interval In Feet	% Clay	% +2 mm.	% Heavy Minerals In Sand and Silt Fraction
#1.	0-5	7.4	0.0	0.71
	5-10	3.0	0.0	0.61
	10-15	2.1	0.0	0.46
	15-20	1.5	0.0	0.46
	20-30	2.5	0.2	0.52
	30-40	13.5	0.6	1.02
	40-50	9.0	0.2	0.94
	50-60	3.5	0.1	0.66
	60-70	1.5	0.1	0.58
	70-75	3.5	0.6	0.80
#2.	0-5	1.7	0.0	0.60
	5-10	0.0	0.0	0.83
	10-15	1.0	0.0	1.00
	15-20	0.5	0.0	1.64
	20-30	2.0	0.0	1.40
	30-40	0.0	0.0	1.05
	40-50	1.0	0.0	2.87
	50-55	2.0	0.0	1.23
	55-60	1.2	0.0	1.01
	60-70	3.5	0.1	1.26
	70-75	3.2	0.0	1.50

Table 5 - (continued)

Hole Number (Figure 3)	Sampled Interval In Feet	% Clay	% +2 mm.	% Heavy Minerals In Sand and Silt Fraction
#3.	0-5	2.9	0.0	0.54
	5-10	2.6	0.0	0.67
	10-15	2.0	0.0	0.49
	15-20	1.9	0.0	0.62
	20-30	4.7	0.0	0.45
	30-40	5.6	0.0	0.77
	40-50	3.8	0.0	0.86
	50-60	2.8	0.0	0.70
	60-65	1.9	0.0	0.98
70-75	14.6	1.7	0.95	
#4.	0-5	2.0	0.0	0.98
	5-10	1.2	0.0	2.46
	10-15	0.0	0.0	2.66
	15-20	1.7	0.0	1.11
	20-25	2.1	0.2	0.76
	25-30	2.0	0.0	1.52
	30-40	1.5	0.0	1.99
	40-45	0.6	0.1	1.92
	45-50	1.0	0.0	2.21
	50-60	0.5	0.0	2.27
	60-65	1.0	0.0	1.45
	65-70	3.8	0.0	1.30
70-75	9.8	0.0	1.26	

Table 5 - (continued)

Hole Number (Figure 3)	Sampled Interval In Feet	% Clay	% +2 mm.	% Heavy Minerals In Sand and Silt Fraction
#5.	0-5	2.4	0.0	0.86
	15-20	1.5	0.0	1.15
	20-30	1.5	0.0	1.65
	30-40	1.0	0.0	1.28
	40-45	2.3	0.0	0.85
	45-50	2.0	0.0	0.89
	55-60	8.2	0.0	1.40
	60-70	1.4	0.0	0.84
#6.	0-5	2.0	0.0	0.82
	5-10	4.0	0.0	0.97
	10-15	4.6	0.0	0.92
	15-20	5.9	0.0	0.66
	20-30	4.8	0.0	0.84
	30-40	3.8	0.0	0.67
	40-50	3.4	0.0	0.95
	60-65	8.9	0.8	0.56
#7.	0-5	2.9	0.0	0.59
	5-10	9.0	0.0	0.52
	10-15	2.9	0.0	0.76
	15-20	8.8	0.0	0.74
	20-30	8.6	0.0	0.42
	30-40	5.0	0.0	0.94

Hole Number (Figure 3)	Sampled Interval In Feet	% Clay	% +2 mm.	% Heavy Minerals In Sand and Silt Fraction
#8.	0-5	1.6	0.0	0.99
	5-10	1.0	0.0	0.76
	10-15	2.1	0.0	0.67
	15-20	1.3	0.0	0.97
	20-25	0.9	0.0	1.10
	25-30	0.9	0.0	1.64
	35-40	0.9	0.0	2.83
	40-50	1.0	0.0	2.55
	50-60	1.0	0.0	0.77
	60-65	1.1	0.0	0.83
	65-70	0.0	0.0	0.89
	70-75	0.5	0.0	1.10
#9.	0-5	8.1	0.0	0.57
	5-10	3.9	0.0	0.75
	10-15	8.1	0.0	0.78
	15-20	14.9	0.0	0.81
	20-30	6.5	0.1	1.01
	30-35	7.3	0.5	1.12
	40-45	limestone		
	60-70	limestone		
	70-75	limestone		

Table 5 - (continued)

Hole Number (Figure 3)	Sampled Interval In Feet	% Clay	% +2 mm.	% Heavy Minerals In Sand and Silt Fraction
#10.	0-5	5.5	0.0	0.84
	5-10	5.5	0.0	1.15
	10-15	9.8	0.0	0.92
	15-20	9.7	0.0	0.81
	20-25	6.6	0.0	0.72
	25-30	4.1	0.0	0.49
	30-40	1.8	0.0	0.61
	40-45	3.4	0.0	0.80
#11.	5-10	1.0	0.0	1.26
	10-15	1.4	0.0	2.23
	15-20	0.9	0.0	1.65
	20-30	0.9	0.0	1.60
	35-40	1.2	0.0	1.77
	40-50	2.0	0.0	1.54
	50-60	2.7	0.0	0.97
	60-70	2.0	0.0	0.75
#12	0-5	0.8	0.0	0.40
	5-10	3.7	0.0	0.69
	10-15	1.0	0.0	0.83
	15-20	2.5	0.0	1.11
	20-25	3.0	0.0	0.55
	25-30	1.2	0.0	0.80
	35-40	1.1	0.0	1.50
	40-45	0.9	0.0	1.59
	45-50	1.6	0.0	2.00
	50-60	4.1	0.0	1.40
	60-70	7.0	0.0	1.30
70-75	4.0	0.0	0.91	

ADDENDUM 2

PETROGRAPHIC ANALYSIS OF CORE FROM EFFINGHAM COUNTY

by James Neiheisel

Core from a 300-foot hole drilled in Effingham County, Georgia, by the Mineral Engineering Branch, Georgia Institute of Technology, and Georgia Department of Mines, Mining and Geology (Husted, Furcron and Bellinger, 1966) was examined mechanically and petrographically. The hole is 3.2 miles north-northwest of the intersection of Georgia Highways 119 and 17 in Guyton. Analysis results are in Tables 6 and 7.

Laboratory Procedure

A series of representative samples was obtained for each 5 feet of core hole and the sample was reduced by a microsplitter into 2 representative samples weighing between 25 and 50 grams each.

The first sample was washed through a set of sieves and the fines (less than 325 sieve size) collected in a large vessel. The sand was dried and passed through a set of small sieves by hand screening for five minutes and the percent of total sample computed for each sieve size. The fines were reduced in volume by decantation and then evaporated to dryness and this weight added to the previous screenings. Each individual sieve size was examined for composition under the binocular and petrographic microscopes and an average percent composition, based on a 200 point count per sieve size and weighted size fraction, recorded. Clay was estimated from the -325 sieve size fraction. Where abundant calcite was present, acid leaching was employed to separate the clay from the carbonate minerals.

The second sample was acid leached with dilute hydrochloric acid and carbonate and phosphate minerals decanted through the -325 sieve along with the clay minerals. Comparison with the first sample and visual microscopic examination enabled an estimate of percent clay and carbonate and phosphate in the sediment sample.

The -40 sieve size and +325 sieve size portion of the acid-leached sample was weighed, the heavy minerals separated with bromoform, washed, dried, and weight percent of heavy minerals in the total sample computed. The dried heavy minerals were sieved through 100, 200, and 325 sieves and the weight percent of each sieve size determined. A representative portion of each sieve size was placed on a glass slide in index oil and another represen-

tative portion of each sieve size placed in Lakeside Plastic No. 70 on a glass slide; the latter provides a permanent record of the heavy-mineral suite. Each slide was examined under the petrographic microscope and at least a 200 count per size fraction made. A weighted average was computed for each heavy-mineral species and results tabulated in Table 7.

The composition of the sediment is listed in Table 6. Some materials are more accurately computed than others; for example, the clay mineral content is at best an approximation while acid-insoluble heavy minerals are known very accurately. Acid-leached carbonate rock enabled more accuracy as to weight percent than point count could have afforded. Because of its flat shape, mica percent is at best an approximation. Feldspar and quartz are believed to be accurate as regards weight percent distribution.

TABLE 6 MECHANICAL SIEVE ANALYSIS AND COMPOSITION OF SEDIMENT SAMPLES FROM EFFINGHAM COUNTY, GEORGIA

DEPTH (ft.)	% RETAINED						MEDIAN DIAMETER (mm.)	AVERAGE PER CENT COMPOSITION						
								QUARTZ	FELDSPAR	CALCITE	PHOSPHATE	CLAY (2)	H. MINERAL	MICA
	40	80	100	200	PAN									
8-15	93.2	6.0	0.4	0.4	Tr	1.31	98.8	1.0	-	-	-	0.1	0.1	Trace
15-24	80.4	12.8	1.6	2.4	2.8	1.20	96.9	1.0	-	-	-	2.0	0.1	Trace
24-28	89.8	4.4	0.8	2.0	3.0	1.25	96.9	1.0	-	-	-	2.0	0.1	Trace
28-32	15.2	39.2	17.6	5.6	21.6	0.22	70.8	10.0	-	-	-	18	1.2	Trace
38-45	13.2	16.8	15.6	35.6	18.8	0.15	74.4	6.0	-	-	-	17	1.6	1
45-49	14.0	6.8	24.0	49.8	5.4	0.17	83.9	6.0	Tr	Tr	Tr	6	3.1	1
49-52	8.0	6.4	22.8	50.4	12.4	0.13	85.2	6.0	-	-	-	5	2.8	1
52-57	2.4	6.8	24.0	52.0	7.2	0.14	79.8	10.0	-	-	-	7	2.2	3
57-61	0.2	4.4	9.2	58.6	27.6	0.09	61.5	12.0	-	-	-	20	1.5	5
61-65	4.0	2.4	2.8	59.2	32.6	0.09	61.4	10.0	-	Tr	Tr	25	1.6	2
65-78	35.6	3.0	1.0	34.8	25.6	0.12	67.8	4.0	15	15	2	10	1.2	Trace
78-93	18.3	41.7	6.7	12.5	20.8	0.18	74.8	8.0	Tr	Tr	5	11	1.2	Trace
93-100	52.4	22.4	12.8	8.4	4.0	0.48	66.7	8.0	2	2	20	3	0.3	Trace
100-108	29.3	59.8	8.7	1.6	0.6	0.41	54.6	5.0	36	36	2	2	0.4	Trace
108-128	35.8	42.0	9.3	8.7	4.2	0.20	47.8	6.0	40	40	2	3	1.2	Trace
128-145	8.3	8.2	4.2	10.7	68.6	0.06	20.7	6.0	68	68	3	2	0.3	Trace

Table 6 - (continued)

DEPTH (ft.)	% RETAINED					MEDIAN DIAMETER (mm.)	AVERAGE PER CENT COMPOSITION							CLAY (2)	H. MINERAL	MICA
	MEDIAN (1)						QUARTZ	FELDSPAR	CALCITE	PHOSPHATE	CLAY (2)	H. MINERAL	MICA			
	40	80	100	200	PAN											
145-150	54.8	15.8	4.8	10.0	15.2	0.50	71.7	4.0	20	2	2	0.3	Trace			
150-155	34.5	23.1	11.1	9.3	22.0	0.28	55.3	3.0	20	3	18	0.7	Trace			
155-160	24.2	28.2	15.3	8.4	24.2	0.20	64.6	5.0	17	2	11	0.4	Trace			
165-170	31.2	9.6	9.6	10.8	38.8	0.18	57.7	3.0	7	2	30	0.3	Trace			
170-175	27.2	14.2	14.2	10.0	34.4	0.17	54.6	5	8	2	30	0.4	Trace			
175-180	22.0	6.0	9.2	16.0	46.8	0.09	52.8	4	10	3	30	0.2	Trace			
180-185	21.2	7.5	8.6	14.5	48.2	0.09	55.7	2	5	2	35	0.3	Trace			
185-190	20.0	7.2	6.0	10.8	56.0	0.06	46.9	2	5	2	44	0.1	Trace			
190-195	35.8	14.0	6.0	12.0	32.2	0.20	68.8	4	3	2	22	0.2	Trace			
195-200	40.0	2.1	2.7	7.2	48.0	0.10	62.6	2	2	Tr	33	0.4	Trace			
200-205	40.0	12.8	12.0	17.6	18.6	0.20	77.5	5	4	Tr	13	0.5	Trace			
205-210	28.6	3.2	9.2	16.8	42.8	0.13	62.6	3	4	Tr	30	0.4	Trace			
210-215	28.0	4.4	2.8	22.0	42.8	0.11	54.4	5	3	2	35	0.6	Trace			
215-220	34.8	8.0	8.8	10.8	37.6	0.17	53.6	3	8	2	33	0.4	Trace			
220-225	62.2	20.4	5.3	7.9	4.2	0.42	55.5	3	38	1	2	0.5	Trace			

Table 6 - (continued)

DEPTH (ft.)	% RETAINED						MEDIAN (1) DIAMETER (mm.)	AVERAGE PER CENT COMPOSITION						
								QUARTZ	FELDSPAR	CALCITE	PHOSPHATE	CLAY (2)	H. MINERAL	MICA
	40	80	100	200	PAN									
225-230	56.8	8.1	4.0	5.6	25.7	0.45	71.8	5	18	3	2	0.2	Trace	
230-235	62.0	12.0	3.2	9.2	13.6	0.60	47.9	4	42	4	2	0.1	Trace	
235-240	48.0	12.0	8.4	8.8	20.8	0.38	43.6	4	48	3	1	0.4	Trace	
240-245	47.2	12.0	10.4	7.2	23.2	0.38	50.9	5	41	2	1	0.1	Trace	
245-250	53.2	12.8	8.0	6.8	19.2	0.41	41.7	4	48	4	2	0.3	Trace	
250-255	56.8	12.0	8.4	7.2	15.6	0.44	46.9	4	45	3	1	0.1	Trace	
255-260	60.8	11.2	6.0	6.0	24.0	0.48	47.6	4	42	3	3	0.4	Trace	
260-265	50.4	15.2	8.8	8.0	21.6	0.42	49.8	5	40	4	1	0.2	Trace	
265-270	48.0	8.0	4.0	4.4	35.4	0.41	47.6	6	40	3	3	0.4	Trace	
270-275	60.0	13.0	2.2	3.2	21.6	0.56	33.7	6	56	3	1	0.3	Trace	
275-280	58.2	11.6	3.4	3.0	23.8	0.48	33.5	2	60	2	2	0.5	Trace	
280-285	56.0	14.4	3.6	0.8	25.2	0.45	25.8	2	68	2	2	0.2	Trace	
285-290	88.1	4.0	1.2	2.4	4.3	1.02	24.8	1	70	2	2	0.2	Trace	
290-295	78.4	8.4	2.8	3.6	8.4	1.00	22.8	2	72	2	1	0.2	Trace	
295-300	68.0	9.6	3.6	6.8	12.0	0.62	23.8	2	70	2	2	0.2	Trace	

NOTES: 1. MEDIAN DIAMETER IN MILLIMETERS AS OBTAINED FROM THE CUMULATIVE CURVE.

2. PER CENT COMPOSITION OF CLAY ESTIMATED AS -325 (ACID INSOLUBLE) MESH SIEVE SIZE.

TABLE 7. AVERAGE⁽²⁾ ACID-INSOLUBLE HEAVY-MINERAL SUITE AS FRACTIONAL
PER CENT SAMPLES FROM EFFINGHAM COUNTY, GEORGIA

DEPTH (FT.)	0-	28-	38-	45-	49-	52-	57-	61-	65-	78-	100-	108-	128-	145-	150-	155-	160-	165-	170-	175-	185-	190-	195-
	28	32	45	49	52	57	61	65	78	93	108	128	145	150	155	160	165	170	175	180	190	195	
ILMENITE- LEUCOXENE	57	57	41	21	28	25	39	33	34	44	54	49	51	51	44	48	36	46	50	51	46	51	
EPIDOTE	3	5	25	47	42	46	39	35	38	23	20	16	22	20	16	30	16	16	19	24	18	17	
ZIRCON	7	13	11	6	5	6	11	12	12	14	10	10	7	11	8	9	6	10	8	7	12	13	
SILLIMANITE	12	13	14	13	9	10	5	8	6	6	5	5	6	6	12	11	10	10	6	8	8	7	
STAUROLITE	10	2	1	2	1	1	1	1	1	3	3	9	9	3	6	5	7	7	6	4	8	4	
GARNET	Tr	Tr	1	2	1	Tr	1	1	1	2	2	3	3	1	2	2	2	2	2	1	2	2	
TOURMALINE	2	2	1	1	1	1	1	1	2	2	2	2	2	2	2	2	2	3	2	1	2	1	
HORNBLLENDE	Tr	Tr	Tr	6	10	8	Tr	5	1	1	Tr	Tr	1	2	1	4	4	1	2	Tr	Tr	Tr	
RUTILE	5	5	5	1	1	2	2	3	4	3	2	1	3	2	4	4	1	3	3	3	3	4	
KYANITE	2	2	Tr	Tr	1	Tr	Tr	Tr	Tr	1	1	Tr	Tr	Tr	1	1	1	1	1	Tr	Tr	Tr	
OTHER ⁽¹⁾	2	1	1	1	1	1	1	1	1	1	1	1	2	Tr	Tr	1	1	1	1	1	1	1	

NOTES: TR = TRACE AMOUNTS LESS THAN 0.5% HEAVY-MINERAL FRACTION.

1. OTHER INCLUDES APATITE, MONAZITE, MAGNETITE, BERYL, ETC.
2. AVERAGE BASED ON WEIGHTED POINT COUNT OF THREE-SIEVE SIZES.

Table 7 - (continued)

DEPTH (FT)	195- 200	200- 205	205- 210	210- 215	215- 220	220- 225	225- 230	230- 235	235- 240	240- 245	245- 250	250- 255	255- 260	260- 265	265- 270	270- 275	275- 280	280- 285	285- 290	290- 295	295- 300
TIMENITE- LEUCOXENE	42	47	46	42	48	42	43	33	34	34	34	32	31	34	39	30	50	38	41	50	42
EPIDOTE	14	20	15	20	17	21	19	32	27	30	26	28	27	32	23	27	9	28	29	22	34
ZIRCON	18	12	16	18	11	10	10	5	9	5	10	10	8	7	5	9	11	8	6	10	5
SILLIMANITE	9	7	9	9	10	12	9	10	11	11	12	11	15	8	11	13	12	9	8	4	4
STAUROLITE	4	3	2	3	4	4	4	4	3	3	4	2	5	4	3	5	4	5	5	4	4
GARNET	2	3	3	2	5	6	8	9	11	12	10	12	10	10	13	8	6	7	6	6	4
TOURMALINE	3	1	2	1	1	2	2	3	2	2	1	2	1	2	1	3	2	1	2	Tr	1
HORNBLLENDE	2	Tr	Tr	Tr	Tr	Tr	Tr	Tr	Tr	Tr	Tr	Tr	Tr	Tr	Tr	1	3	Tr	Tr	1	2
RUTILE	4	5	5	4	3	2	4	3	2	2	2	2	2	2	3	2	2	3	2	2	2
KYANITE	1	1	1	Tr	Tr	Tr	Tr	Tr	Tr	Tr	Tr	Tr	Tr	Tr	Tr	Tr	1	Tr	Tr	1	1
OTHER (1)	1	1	1	1	1	1	1	1	1	1	1	1	1	1	2	Tr	Tr	1	1	Tr	1

NOTES: TR = TRACE AMOUNTS LESS THAN 0.5% HEAVY-MINERAL FRACTION.

1. OTHER INCLUDES APATITE, MONAZITE, MAGNETITE, BERYL, ETC.
2. AVERAGE BASED ON WEIGHTED POINT COUNT OF THREE-SIEVE SIZES.

Petrographic Description

The sediment from the surface to 45 foot depth consists of clean, fine- to medium-grained, angular sand (top 32 feet) overlying a clayey, fine-grained, micaceous, limonitic sand (32 to 45 foot depth). Average mineral composition approximates the following:

<u>Sand, 0-32 Foot Depth</u>	<u>Fine Sand, 32-45 Foot Depth</u>
Quartz..... 97.5	Quartz..... 73.1
Feldspar..... 1.0	Feldspar..... 8.0
Clay..... 1.4	Clay..... 17.0
Heavy Minerals..... 0.1	Heavy Minerals..... 1.4
Mica..... <u>Tr</u>	Mica..... <u>0.5</u>
100	100

<u>Median Diameter in mm.</u>	<u>Median Diameter in mm.</u>
Range..... 1.20 - 1.31	Range..... 0.15 - 0.22
Average..... 1.25	Average..... 0.18

The lithologic unit from the 45 to 65 foot depth is an olive-green, micaceous, feldspathic, clayey silt which is unique in containing abundant hornblende in the heavy-mineral fraction and higher values of mica and feldspar than any of the other sediments of the core.

The sediment from 65 to 100 foot depth consists of dark-green, phosphatic pebble-bearing, clayey sand. This lithologic unit is unique in containing black, rounded, polished pellets and pebbles up to 2 cm. size and concentrations up to 20 percent of the sample from 93 to 100 foot depth. The black color of the phosphorite is caused by inclusions of pyrite and carbonaceous matter and may reflect the reducing conditions in typical estuarine environments.

Some of the phosphorite clearly reveals teeth and bone fragment origin. The similar size relation with quartz suggests that all the phosphorite pellets are detrital.

The sediment from 100 to 160 foot depth is cream to light-gray clastic carbonate and shell hash, feldspathic, slightly phosphatic sand. From 25 to 50 percent of the carbonate fraction is shell fragments.

Average mineral composition and sedimentary parameters approximate the following percentage distribution:

<u>Sandy Silt</u> <u>45 to 65 foot depth</u>	<u>Phosphatic Sand</u> <u>65 to 100 foot depth</u>	<u>Calcareous Sand</u> <u>100 to 160 foot depth</u>
Quartz..... 74.5	Quartz..... 69.1	Quartz..... 51.2
Feldspar..... 8.5	Feldspar..... 7.0	Feldspar..... 5.0
Clay..... 12.4	Clay..... 8.0	Clay..... 6.3
Heavy Minerals..... 2.2	Heavy Minerals..... 0.9	Heavy Minerals... 0.6
Calcite..... Tr	Calcite..... 6.0	Calcite..... 34.6
Mica..... 2.4	Mica..... Tr	Mica..... Tr
Phosphorite..... <u>Tr</u>	Phosphorite..... <u>9.0</u>	Phosphorite..... <u>2.3</u>
100	100	100
<u>Median Diameter</u> <u>in mm.</u>	<u>Median Diameter</u> <u>in mm.</u>	<u>Median Diameter</u> <u>in mm.</u>
Range..... 0.09 - 0.17	Range..... 0.12 - 0.48	Range..... 0.06 - 0.50
Average..... 0.10	Average..... 0.26	Average... 0.28

The sediment from 160 to 220 foot depth is comprised of greenish-gray, clayey, feldspathic, slightly phosphatic, calcareous-shelly sand. Both the amber and black phosphorite pellets of similar grain size as quartz occur in amounts up to 3 percent. All the samples display remarkable uniformity in texture. Approximately half of the carbonate fraction consists of shell fragments.

Average mineral composition and sedimentary parameters approximate the following percentage distribution:

Clayey, Shelly Sand, 160 to 220 Foot depthMedian Diameter in mm.

Quartz.....	56.5	Range.....	0.09 - 0.20
Feldspar.....	3.5	Average....	0.14
Clay.....	31.3		
Heavy Minerals.....	0.4		
Calcite.....	6.6		
Phosphorite.....	1.7		
Mica.....	Tr		
	<u>100.0</u>		

The sediment from the 220 to 300 foot depth is comprised of uniform, light-grey, sandy, slightly phosphatic, shelly limestone. The mineral composition and physical character of the limestone is remarkably uniform. This uniformity may be demonstrated by superimposing cumulative weight distribution curves or computing individual sedimentary parameters for comparison purposes. Inspection of the heavy-mineral suite also reveals uniform garnet distribution in the limestone which is several times that experienced in any other sediment unit in the core. This garnet concentration appears related to environmental factors. Phosphorite also occurs in both the amber and black, round, polished pellets of similar grain size as quartz.

Average mineral composition and sedimentary parameters approximate the following percentage distribution:

Sandy Limestone, 220 to 300 foot depthMedian Diameter in mm.

Quartz.....	42.0	Range.....	0.38 - 1.00
Feldspar.....	3.4	Average....	0.53
Clay.....	1.7		
Heavy Minerals.....	0.3		
Calcite.....	50.0		
Phosphorite (black & amber)....	2.6		
Mica.....	Tr		

Conclusions on Effingham County Well

Heavy minerals, exclusive of phosphorite, average about 0.6 percent of the total sediment. The greatest concentration of heavy minerals (1.5 to 3.1 percent) is in the 38 to 65-foot interval. The average heavy-mineral suite in percent of the heavy-mineral fraction is as follows: 43% ilmenite-leucoxene, 24% epidote, 9% zircon, 9% sillimanite, 4% staurolite, 4% garnet, 3% rutile, 2% tourmaline, 1% hornblende, 1% magnetite, monazite, apatite, beryl, hypersthene and others.

Anomalous amounts of hornblende occur in olive-green, clayey silt at 45 to 65 feet. Garnet, while insignificant in most heavy-mineral suites, occurs in appreciable amounts at 220 to 300 feet. Hornblende and garnet are the least stable of the heavy minerals and their relative abundance is related to environmental factors favoring preservation. Staurolite, on the other hand, is one of the more stable heavy mineral species, and its erratic distribution is more related to size preference. Staurolite is always in greater population in larger sieve sizes which tends to support this view. Rutile, zircon, and ilmenite-leucoxene, on the other hand, are finer grained. Greater than 10 percent feldspar occurs in the olive-green, clayey silt, at 45 to 65 feet, where the feldspars are relatively fresh with well defined twinning. In all sediment, K-feldspar, as orthoclase and microcline, is more abundant than plagioclase varieties.

Calcite, as clastic shell fragments, comprises but very minor amounts of the sediment to 100 foot depth. Below 100 foot depth, calcite occurs in abundance. The most indurated calcite occurs in the sample from 100 to 108 foot depth and the least indurated where clastic shell comprises the major portion of the carbonate fraction. There is no interlocking-granular limestone

or crystalline limestone in the sediment.

In most sediment samples quartz is the most abundant constituent and second only to calcite in limestone-rich sediment. The largest quartz particles occur as smooth, flattened, pebbles up to 3 cm. in size in the phosphate-rich horizons.

Mica is locally abundant only in clayey silt or fine sands from the 32 to 65 foot depth.

Median diameter values for sediment are readily computed and useful in correlating strata. Other sedimentary parameters could also prove of value in correlation, if computed.

REFERENCES CITED

Cooke, C. Wythe (1939), Coastal Plain portion:

Geologic Map of Georgia, prepared by the Ga. Dept. of Mines,
Mining and Geology in cooperation with the U. S. Geological Survey.

_____ (1943), Geology of the Coastal Plain of Georgia:

U. S. Geol. Survey Bull. 941.

Doering, J. A. (1960), Quaternary surface formations of the southern
part of the Atlantic Coastal Plain; Jour. Geology, v. 68, no. 2,
p. 182-202.

Dryden, Lincoln (1958), Monazite in part of the Southern Atlantic Coastal
Plain: U. S. Geol. Survey Bull. 1042-L, p. 393-429.

Dryden, L. and Dryden, C. (1956), Coastal Plain heavy minerals:

A speculative summary: 20th Inter. Geol. Cong., Mexico, p. 16.

Furman, N. H. (1962), Standard methods of chemical analysis:

Van Nostrand, New York, 6th ed., v. 1.

Giles, Robert T. (1966), River, beach and dune sands of the southeastern
Atlantic Coast of the United States: Geol. Soc. America, Southeastern
Section, Field Trip No. 1 Guidebook, University of Ga. Marine Institute,
p. 71-76.

_____ and Pilkey, O. H. (1965), Atlantic beach and dune sands
of the southern United States: Jour. Sed. Petrology, v. 35, p. 900-910.

Gorsline, D. S. (1963), Bottom sediments of the Atlantic shelf and slope off the southern United States: Jour. Geology, v. 71, no. 4, p. 422-440.

Herrick, Stephen M. (1961), Well logs of the Coastal Plain of Georgia: Ga. Geol. Survey Bull. 70.

_____ (1965), A subsurface study of Pleistocene deposits in Coastal Georgia: Ga. Geol. Survey Information Cir. 31.

Hill, J. H., and Miles, M. J. (1959), Gravimetric determination of zirconium in titanium: Analytical Chemistry, v. 31, no. 2, p. 252-254.

Hoyt, J. H., and Hails, J. R. (1966), Formation and modification of Pleistocene shorelines in coastal Georgia (abs.): Geol. Soc. America, AAAS Program, Sec. E., Washington, D. C., p. 20.

_____ and Weimer, R. J. (1963), Comparison of modern and ancient beaches, central Georgia coast: Am. Assoc. Petroleum Geologists Bull. 47, p. 529-531.

_____ Weimer, R. J., and Henry, V. J., Jr., (1964), Late Pleistocene and Recent sedimentation, central Georgia coast, U.S.A., in L.M.J.U. Van Straaten (ed.), Developments in Sedimentology, v. 1, Deltaic and Shallow Marine Deposits, p. 170-176.

Husted, John E., Furcron, A. S., and Bellinger, Frederick (1966), Project report No. 3, South Georgia minerals program: Mineral Engineering Branch, Engineering Experiment Station, Georgia Institute of Technology and Georgia Dept. of Mines, Mining and Geology.

- LaForge, Laurence, Cooke, C. Wythe, Keith, Arthur, and Campbell, Marius R. (1925), Physical geography of Georgia: Ga. Geol. Survey Bull. 42.
- MacNeil, F. S. (1947), Geologic map of the Tertiary and Quarternary formations of Georgia: U. S. Geol. Survey Oil and Gas Prel. Map 72.
- _____ (1949), Pleistocene shorelines in Florida and Georgia: U. S. Geol. Survey Prof. Paper 221-F.
- Martens, J. H. C. (1928), Beach deposits of ilmenite, zircon and rutile in Florida: Fla. State Geol. Survey, 19th Annual Rept., p. 124-154.
- _____ (1935), Beach sands between Charleston, South Carolina and Miami, Florida: Geol. Soc. America Bull., v. 46, no. 10, p. 1563-1596.
- McKelvey, V. E., and Balsley, J. R., Jr. (1948), Distribution of coastal black-sands in North Carolina, South Carolina, and Georgia, as mapped from an airplane: Econ. Geol., v. 43, no. 6, p. 518-524.
- Mertie, J. B. (1953), Monazite deposits of the Southeastern Atlantic States: U. S. Geol. Survey Circ. 237.
- _____ (1958), Zirconium and hafnium in the Southeastern Atlantic States: U. S. Geol. Survey Bull. 1082-A.
- Miller, Jesse A. (1957), Titanium, a materials survey: U. S. Bur. Mines I. C. 7791.
- Minerals Engineering Group, Engineering Experiment Station, Georgia Institute of Technology and Georgia Department of Mines, Mining and Geology (1966), Ga. Dept. of Mines Proj. Rept. No. 2.

Moxham, R. M. (1954), Airborne radioactivity survey in the Folkston area, Charlton County, Georgia, and Nassau County, Florida: U. S. Geol. Survey Geophys. Inv. Map GP 119.

Neiheisel, James (1962), Heavy mineral investigation of Recent and Pleistocene sands of lower Coastal Plain of Georgia: Geol. Soc. American Bull., v. 73, no. 3, p. 365-374.

_____ (1965), Source and distribution of sediments at Brunswick Harbor and vicinity, Georgia: U. S. Army Coastal Eng. Research Center Tech. Man., no. 12.

Overstreet, W. C., Cuppels, N. P., and White, A. M. (1956), Monazite in Southeastern United States: U. S. Geol. Survey Prof. Paper 300, p. 597-617.

Pilkey, O. H. (1963), Heavy minerals of the U. S. South Atlantic continental shelf and slope: Geol. Soc. American Bull., v. 74, no. 5, p. 641-648.

_____ and Frankenberg, Dirk (1964), The relict-recent sediment boundary on the Georgia continental shelf: Ga. Academy of Science Bull. 22, no. 1, p. 37-40.

Rosenfeld, Sigmund J. (1955), A study of the Pleistocene shorelines between the Altamaha and Savannah Rivers in Georgia: unpublished M. S. Thesis, Emory University.

Sandell, E. B. (1944), Colorimetric determination of traces of metals: Interscience Publishers, New York.

- Sinha, E. F. (1959), Geomorphology of the lower Coastal Plain from the Savannah River area, Georgia to the Roanoke River area, North Carolina: unpublished Ph. D. Thesis, Univ. of N. C.
- Spencer, Robert V. (1948), Titanium minerals in Trail Ridge: U. S. Bur. Mines Rept. Inv. 4208.
- Teas, L. P. (1921), Preliminary report on the sand and gravel deposits of Georgia: Ga. Geol. Survey Bull. 37.
- Temple, Alan K. (1966), Alteration of ilmenite: Econ. Geol., v. 61, no. 4, p. 695-714.
- Thoenen, J. R., and Warne, J. D. (1949), Titanium minerals in central and northeastern Florida: U. S. Bur. Mines Rept. Inv. 4515.
- U. S. Geological Survey (1953), airborne radioactivity anomalies map: Southern Chemical Industry, Nov.-Dec., p. 18.
- Veatch, Otto and Stephenson, L. W. (1911), Geology of the Coastal Plain of Georgia: Ga. Geol. Survey Bull. 26.
- Weimer, R. J., and Hoyt, J. H. (1964), Burrows of Callianassa major Say, geologic indicators of littoral and shallow neritic environments: Jour. of Paleontology, v. 38, no. 4, p. 761-767.
- Whitlatch, George I. (1962), Georgia's mineral resources, Project No. E-233-3: Engineering Experiment Station, Georgia Institute of Technology, Atlanta, Ga.



Occurrence and geochemistry of radium in water from principal drinking-water aquifer systems of the United States

Zoltan Szabo^{a,*}, Vincent T. dePaul^a, Jeffrey M. Fischer^a, Thomas F. Kraemer^b, Eric Jacobsen^a

^a US Geological Survey, 810 Bear Tavern Rd., W. Trenton, NJ 08628, United States

^b US Geological Survey, 12201 Sunrise Valley Rd., Reston, VA 20192, United States

ARTICLE INFO

Article history:

Received 24 June 2010

Accepted 3 November 2011

Available online 22 November 2011

Editorial handling by A. Vengosh

ABSTRACT

A total of 1270 raw-water samples (before treatment) were collected from 15 principal and other major aquifer systems (PAs) used for drinking water in 45 states in all major physiographic provinces of the USA and analyzed for concentrations of the Ra isotopes ²²⁴Ra, ²²⁶Ra and ²²⁸Ra establishing the framework for evaluating Ra occurrence. The US Environmental Protection Agency Maximum Contaminant Level (MCL) of 0.185 Bq/L (5 pCi/L) for combined Ra (²²⁶Ra plus ²²⁸Ra) for drinking water was exceeded in 4.02% (39 of 971) of samples for which both ²²⁶Ra and ²²⁸Ra were determined, or in 3.15% (40 of 1266) of the samples in which at least one isotope concentration (²²⁶Ra or ²²⁸Ra) was determined. The maximum concentration of combined Ra was 0.755 Bq/L (20.4 pCi/L) in water from the North Atlantic Coastal Plain quartzose sand aquifer system. All the exceedences of the MCL for combined Ra occurred in water samples from the following 7 PAs (in order of decreasing relative frequency of occurrence): the Midcontinent and Ozark Plateau Cambro-Ordovician dolomites and sandstones, the North Atlantic Coastal Plain, the Floridan, the crystalline rocks (granitic, metamorphic) of New England, the Mesozoic basins of the Appalachian Piedmont, the Gulf Coastal Plain, and the glacial sands and gravels (highest concentrations in New England).

The concentration of Ra was consistently controlled by geochemical properties of the aquifer systems, with the highest concentrations most likely to be present where, as a consequence of the geochemical environment, adsorption of the Ra was slightly decreased. The result is a slight relative increase in Ra mobility, especially notable in aquifers with poor sorptive capacity (Fe-oxide-poor quartzose sands and carbonates), even if Ra is not abundant in the aquifer solids. The most common occurrence of elevated Ra throughout the USA occurred in anoxic water (low dissolved-O₂) with high concentrations of Fe or Mn, and in places, high concentrations of the competing ions Ca, Mg, Ba and Sr, and occasionally of dissolved solids, K, SO₄ and HCO₃. The other water type to frequently contain elevated concentrations of the Ra radioisotopes was acidic (low pH), and had in places, high concentrations of NO₃ and other acid anions, and on occasion, of the competing divalent cations, Mn and Al. One or the other of these broad water types was commonly present in each of the PAs in which elevated concentrations of combined Ra occurred. Concentrations of ²²⁶Ra or ²²⁸Ra or combined Ra correlated significantly with those of the above listed water-quality constituents (on the basis of the non-parametric Spearman correlation technique) and loaded on principal components describing the above water types from the entire data set and for samples from the PAs with the highest combined Ra concentrations.

Concentrations of ²²⁴Ra and ²²⁶Ra were significantly correlated to those of ²²⁸Ra (Spearman's rank correlation coefficient, +0.236 and +0.326, respectively). Activity ratios of ²²⁴Ra/²²⁸Ra in the water samples were mostly near 1 when concentrations of both isotopes were greater than or equal to 0.037 Bq/L (1 pCi/L), the level above which analytical results were most reliable. Co-occurrence among these highest concentrations of the Ra radionuclides was most likely in those PAs where chemical conditions are most conducive to Ra mobility (e.g. acidic North Atlantic Coastal Plain). The concentrations of ²²⁴Ra were occasionally greater than 0.037 Bq/L and the ratios of ²²⁴Ra/²²⁸Ra were generally highest in the PAs composed of alluvial sands and Cretaceous/Tertiary sandstones from the western USA, likely because concentrations of ²²⁴Ra are enhanced in solution relative to those of ²²⁸Ra by alpha recoil from the aquifer matrix. Rapid adsorption of the two Ra isotopes (controlled by the alkaline and oxic aquifer

* Corresponding author. Tel.: +1 609 771 3929; fax: +1 609 771 3915.

E-mail address: zszabo@usgs.gov (Z. Szabo).

geochemistry) combined with preferential faster recoil of ^{224}Ra generates a $^{224}\text{Ra}/^{228}\text{Ra}$ ratio much greater than 1. The $^{228}\text{Ra}/^{226}\text{Ra}$ activity ratio was locally variable, and was generally lower than 1 (^{226}Ra rich) in samples from PAs with carbonate bedrock, but was typically greater than 1 (^{228}Ra rich) in PAs composed of unconsolidated sand.

Published by Elsevier Ltd. Open access under [CC BY-NC-ND license](#).

1. Introduction

The US Geological Survey (USGS), as part of its National Water Quality Assessment (NAWQA) Program, and in cooperation with the US Environmental Protection Agency (USEPA), has been assessing the occurrence of selected naturally occurring radionuclides in ground water from principal and other major aquifer systems (PAs) used as sources of drinking water in the USA. This article summarizes the results of the nationwide sampling effort conducted to determine the occurrence of the 3 commonly occurring isotopes of Ra, ^{224}Ra , ^{226}Ra and ^{228}Ra in water from the 15 PAs studied. In addition to concentrations of Ra isotopes, concentrations of U and ^{222}Rn , gross alpha- and beta-particle activities, and ancillary water-quality, geochemical, geologic, hydrologic, well-construction, land-use, and other related information were collected at well sites within the PAs. This information creates the framework for understanding Ra occurrence in drinking water from PAs in the USA, defines occurrence where data has been previously lacking on this scale including the west-central and western USA, and addresses issues regarding relationships of Ra occurrence with geology, geochemistry, and general measures of radioactivity, such as gross alpha-particle activity or concentrations of ^{222}Rn .

For more than 75 a, ingestion of Ra has been linked to human cancer risk (Evans, 1933), and cancer-risk estimates have changed little in that time (USEPA, 1999). The greatest health risk is due to Ra being sequestered efficiently into bone tissue, especially from water where Ra is present as the dissolved cation (Mays et al., 1985). The risk is presumed linearly proportional to exposure (amount and duration; USEPA, 1999). Provisional drinking-water standards for Ra (USEPA, 1976) became final with the Radionuclide Rule of 2000 (USEPA, 2000a). For Ra, the Maximum Contaminant Level (MCL) is established such that the sum of ^{226}Ra and ^{228}Ra (termed “combined Ra”) cannot exceed 0.185 Bq/L (5 pCi/L; where 1 pCi/L equals 0.037 Bq/L). The other MCLs promulgated for radionuclides in 2000 are: gross alpha-particle activity (including ^{226}Ra but excluding U and ^{222}Rn), 0.555 Bq/L (15 pCi/L), gross beta-particle activity, 4 millirem per year (isotope specific dose), and U, 30 $\mu\text{g}/\text{L}$. Gross alpha-particle activity has also been suggested for use as a compliance-monitoring “screen” for combined Ra (Hess et al., 1985).

Knowledge of local and regional geochemical and hydrological conditions and the distributions of ^{226}Ra , ^{228}Ra , and ^{224}Ra radioisotopes, as well as those of U, can help water-resource managers and regulators prioritize scarce resources to use for monitoring, to assess exposure, and to inform and educate the local population, especially those consuming water from private drinking-water wells, about the regions most at risk of having high Ra concentrations. To insure water suppliers can meet the MCLs for combined Ra and that for gross alpha-particle activity requires knowledge of the local and regional distribution of both the ^{226}Ra and ^{228}Ra radioisotopes for the former MCL, as well as those of ^{224}Ra and U in addition to that of ^{226}Ra for the latter. If the MCLs cannot be met, knowledge of the local and regional geochemical and hydrological conditions and concentration distributions are of use in the search for an alternate supply. Data of various types and quality, including concentrations of one or more isotopes of Ra, primarily of ^{226}Ra and to a lesser extent, ^{228}Ra , have been collected and summarized in previous national Ra- or radionuclide-occurrence surveys (Scott and Barker, 1962; Hess et al., 1985; Longtin, 1988;

Focazio et al., 2001). None of these surveys coupled data on Ra or radionuclide occurrence with extensive geologic, geochemical, and hydrologic information to provide characterization of the environments of Ra occurrence in the principal drinking-water aquifer systems of the USA.

The recent documentation by Parsa (1998), Focazio et al. (2001) and Szabo et al. (2005) showed that ^{224}Ra as well as ^{228}Ra are more widespread in major aquifers used for drinking water than originally estimated by Hess et al. (1985). Turner et al. (1961) first recognized the effect that the presence of ^{224}Ra in ground water may have on the measurement of gross alpha-particle activity. If the measurement takes place shortly (48–72 h) after sample collection, the ^{224}Ra and its progeny can contribute substantially to alpha-particle activity with the emission of about 0.10 Bq/L (2.7 pCi/L) of alpha particles for each 0.037 Bq/L (1 pCi/L) of ^{224}Ra present (Parsa, 1998; Szabo et al., 2005; Arndt and West, 2008; Arndt, 2010). Thus, 72 h after sample collection, a concentration of 0.20 Bq/L (5.5 pCi/L) of ^{224}Ra in a sample can result in a measured gross alpha-particle activity just about equal to (within 1%) the MCL (Parsa, 1998; Szabo et al., 2005). Consumers ingest the water mostly in this time frame, soon after it is pumped, within 3 days to one week. Conventional gross alpha-particle activity measurements are permissible 30 to even 90 days after sample collection, however. The monitoring and implementation guidance (USEPA, 2000b) recommends but does not mandate that gross alpha-particle activity be determined within 48–72 h in areas rich in Ra in order to account for the presence of the short-lived alpha-particle-emitting isotopes such as ^{224}Ra . The areas most needing these analyses require further definition and prioritization.

The results of the current study, based on water-concentration data from 1270 wells in 45 states, provides extensive geographical coverage of the USA, describes occurrence of and relationships among Ra isotopes, describes Ra isotope ratios where quantifiable, and describes the occurrence of the Ra isotopes in terms of specific geological and geochemical environments. The information on the geology, geochemistry, and hydrology associated with Ra occurrence was used to assess interplay among the important geochemical processes that control Ra mobility and the confluences with general geologic features of the PAs with the highest frequency of Ra occurrence. The results are also used to fill the data gaps described above by adding to the documentation of the distribution of isotopes of Ra in ground water used for drinking water, especially the occurrence of ^{224}Ra in the western USA where data was most lacking, and by examining contributions of isotopes of Ra, including ^{224}Ra , to gross alpha-particle activity there.

1.1. Naturally occurring radium

Radium in nature exists as one of four isotopes: ^{223}Ra , ^{224}Ra , ^{226}Ra or ^{228}Ra . The naturally occurring Ra radionuclides are derived from isotopes of U and Th, specifically long-lived ^{238}U , ^{235}U and ^{232}Th , which produce the various progeny isotopes, including those of Ra, and terminate with formation of stable isotopes of Pb. The ^{223}Ra isotope is a member of the ^{235}U decay series and, therefore, occurs less frequently in the environment in high concentrations than the other Ra isotopes because ^{235}U itself comprises about 0.72% of natural U. Given its limited occurrence, ^{223}Ra is not discussed further. The ^{226}Ra isotope is the sixth member of the ^{238}U decay series, has a half-life of about 1.622 ka, decays by

alpha-particle emission and because of its long half-life, is the most abundant Ra isotope in the environment in terms of actual mass. The ^{228}Ra isotope is the second member of the ^{232}Th decay series, has a half-life of 5.75 a, and decays by beta-particle emission. The ^{224}Ra isotope is the fifth member of the ^{232}Th decay series, has a half-life of 3.64 days, and decays by alpha-particle emission. The relatively short half-life of ^{228}Ra and ^{224}Ra may limit the potential for unsupported transport (transport without the presence of an equivalent amount of the parent in solution) relative to that of the much longer-lived ^{226}Ra isotope, and thereby may lead to change in isotopic ratios in advecting ground water that has long residence time, especially in strata variably enriched in U and Th, and in sorptive clays and oxyhydroxides.

The occurrence of radionuclides in ground water depends first on the concentration and distribution of the parent element in the rock matrix, second on the solubility of the parent element, third on the solubility of the radionuclide itself, fourth on the rate of release of the radionuclide by weathering (leaching) and by recoil relative to the rate of geochemical reactions controlling or limiting mobility, and fifth on the residence time of the water. The occurrence of a parent radionuclide in solution does not necessarily indicate the presence of its decay products because of differences in chemical behavior. Chemically, Ra reacts similarly to other divalent alkaline-earth cations such as Ca and Sr, and is most similar to Ba (Langmuir and Riese, 1985; Gilkeson and Cowart, 1987). Both Ra and Ba are exclusively divalent cations in water, and do not undergo redox transformations; at high pH (near 10), they can form neutral or anionic (primarily SO_4) complexes (Langmuir and Riese, 1985). Radium can readily co-precipitate with Ba sulfate (barite), with Ba carbonate (witherite), or with Sr sulfate (celestite) when the constituents forming these salts are abundant enough in solution that they exceed solubility limits (Langmuir and Melchoir, 1985; Martin and Akber, 1999). Radium is not sufficiently abundant in nature to precipitate Ra sulfate salts, even though Ra sulfate is insoluble (Langmuir and Melchoir, 1985; Grundl and Cape, 2006). In dilute waters, Ra is chemically reactive (sorptive). Laboratory studies have shown that Ra is readily adsorbed by clay minerals (Ames et al., 1983a), but has an even stronger pattern of preferential adsorption to amorphous Fe- and Mn-oxyhydroxides (Moore and Reid, 1973; Ames et al., 1983b; Benes et al., 1984) to which it adsorbs in a matter of seconds to minutes (Krishnaswami et al., 1982). Analyses of natural Fe hydroxide samples have shown that they contain much more ^{226}Ra than surrounding rock matrix (Korner and Rose, 1977) and dissolution of the Fe- and Mn-oxyhydroxides releases Ra to the water (Landa et al., 1991). The increase in Ra mobility with an increase in mineralization is mostly attributed to the competitive exchange with similar ions, the so-called “competing ion” effect (Nathwani and Phillips, 1979) that has been documented for waters that are “mineralized” or saline (Kraemer and Reid, 1984; Langmuir and Melchoir, 1985; Miller et al., 1985; Krest et al., 1999; Sturchio et al., 2001). The physical process known as alpha-recoil, during which the newly created progeny radionuclide recoils in the opposite direction of the ejected alpha particle may liberate Ra rapidly relative to leaching by the weathering process (Tricca et al., 2001; Reynolds et al., 2003). The energy associated with this recoil is 10^4 – 10^6 -times larger than typical chemical-bond energies (Fleischer, 1980; Tanner, 1964). Therefore, isotopes of Ra can be continuously released to ground water by alpha-recoil mechanisms from mineral surfaces.

1.2. Previous national and local radium occurrence surveys

The USEPA has sponsored National Ra- or radionuclide-occurrence surveys for public water-supply systems that use ground-water sources (Hess et al., 1985; Longtin, 1988; Focazio et al., 2001). Results of the randomly designed National Inorganics

and Radionuclide Survey (NIRS; see Longtin, 1988) showed that the MCL was exceeded by ^{226}Ra alone in about 1.0% of the 990 raw and finished public (ground) water-supply samples collected. Of these sites, concentrations of ^{226}Ra equaled or exceeded the minimum reporting level (MRL) of that study of 0.0067 Bq/L (0.18 pCi/L) in 40.2% of the samples. The median national concentration for the samples with concentrations greater than the MRL was 0.0144 Bq/L (0.39 pCi/L) and the maximum was 0.559 Bq/L (15.1 pCi/L). Concentrations of ^{228}Ra exceeded 0.037 Bq/L (1 pCi/L), 0.074 Bq/L (2 pCi/L), and 0.185 Bq/L (5 pCi/L) in 12, 2.2, and 0.50% of the samples (Longtin, 1988), and the maximum concentration was 0.448 Bq/L (12.1 pCi/L). Hess et al. (1985) reported a small number of samples in their survey had combined Ra concentrations of about 0.96–1.0 Bq/L (26–27 pCi/L). Focazio et al. (2001) identified (for samples of raw (untreated) ground water from randomly selected public-supply wells) slightly higher maximum concentrations (^{226}Ra , 0.625 Bq/L or 16.9 pCi/L; ^{228}Ra , 1.35 Bq/L or 36.4 pCi/L) in Ra-rich areas for aquifer systems located mostly in the eastern and central USA, though the median concentration determined for ^{226}Ra was identical to that found in the NIRS study. High concentrations were also determined for ^{224}Ra from a small number of public and private supply wells.

Data from multiple local sources have been collected and were summarized by Michel and Cothorn (1986) and Zapeczka and Szabo (1987). In the eastern USA, local studies have found Ra-rich waters occasionally in the Appalachian province in anoxic waters from black shales and arkoses within Mesozoic Basins (Szabo and Zapeczka, 1991), and in acidic waters from orthoquartzites in the Valley and Ridge Province (Senior and Vogel, 1995; Sloto, 2000). Studies have found Ra-rich water derived from the Cretaceous age unconsolidated quartzose sand aquifer systems of the Southeastern Atlantic Coastal Plain in South Carolina and Georgia (King et al., 1982; Focazio et al., 2001), further studies of Cretaceous, Miocene and younger age surficial aquifer systems in the North Atlantic Coastal Plain from Maryland to New Jersey (Bolton, 2000; Szabo et al., 1997, 2005) found the Ra-rich water to be strongly acidic. The presence of high concentrations of short-lived ^{224}Ra in waters from these aquifers indicates the source of the Ra must be the aquifer materials (Szabo et al., 2005). Occurrence of elevated Ra has been noted locally in supply wells that intercept lenses of mineralized or saline waters from aquifer systems of the Gulf Coastal Plain (Cech et al., 1987), and locally in the carbonate Floridan aquifer system (Miller et al., 1985). High concentrations of U and ^{222}Rn have been documented from the waters from the crystalline-rock and glacial sand and gravel aquifer systems (Ayotte et al., 2007), but the regional occurrence or distribution of Ra has not been studied in either, except to evaluate recoil of Ra in glacial sand and gravel aquifers on Long Island (Tricca et al., 2001) and adsorption of Ra to rocks of the region (Krishnaswami et al., 1982). In the central USA, high concentrations especially of ^{226}Ra , but also of ^{228}Ra have been shown to occur in water from the anoxic and somewhat mineralized Midcontinent and Ozark Plateau Cambro-Ordovician dolomite-sandstone aquifer systems from Oklahoma to Minnesota (Gilkeson and Cowart, 1987; Focazio et al., 2001; Sturchio et al., 2001; Grundl and Cape, 2006), and also in the associated Cretaceous sandstones (Kriege and Hahne, 1992).

Areas in the western USA were ranked as having medium to high probability of containing elevated concentration of ^{228}Ra in ground water by Michel and Cothorn (1986), but initial studies of Ra occurrence were mainly associated with mine waste (Kaufmann et al., 1976; Landa et al., 1991; Martin and Akber, 1999). In recent drinking water supply studies, ^{226}Ra has been found locally in high concentrations in water from valley-fill sedimentary aquifers from small and large fault-block basins (Ruber et al., 2005), including some in organic-C-rich basin-fill sedimentary aquifers (Thomas et al., 1993), and on occasion, from deep confined aquifers with

anoxic waters (Herczeg et al., 1988; Reynolds et al., 2003). Measurable to high concentrations of ^{224}Ra have on occasion been documented in local aquifers (Sturchio et al., 1993; Focazio et al., 2001; Ruberu et al., 2005).

2. Methods

2.1. Principal aquifer system classifications and descriptions

The sampled wells were distributed in 15 principal or other major aquifer systems (termed PAs) that extend over much of the USA as shown in Fig. 1 (available in color, Online Supplemental Fig. S-1). The PAs initially identified as part of the USGS NAWQA Program (Lapham et al., 2005) account for about 75% of the estimated withdrawals of ground water for drinking-water supply in the USA and were the primary focus of sampling efforts. The 15 PA groupings used in this article differ to a small degree from the classification of Lapham et al. (2005) however because for data-reduction and classification purposes, some of the PAs were combined on the basis of geologic similarity, geologic age, geographic proximity, and similarity of other natural features, and Ra concentration results from some less productive aquifers were included in the final data set. The broader geological classification of DeSimone (2009) was used to classify the 15 PAs into eight geological groups: coastal plain unconsolidated quartzose sands, arkosic and lithic-fragment rich unconsolidated basin fill and alluvium, glacial sand and gravel deposits, sandstones and shales, interbedded (mixed) sandstone and carbonate rocks, carbonate rocks, felsic to intermediate crystalline rocks plus metasediments, and basalts, as shown in Table 1, where brief descriptions from the sampled areas are provided. (For broader descriptions, see the Supplemental Information, and also the National Atlas, USGS, 2005.) Abbreviations shown for PAs in Table 1 are used hereafter). The most areally extensive PA is the

glacial sand and gravel system (GLCL), which extends across the northern USA from Maine to Washington (broadly described by Warner and Arnold (2005) and Arnold et al. (2008)).

The broad range of radionuclide contents (^{40}K , equivalent ^{238}U and equivalent ^{232}Th) of the near-surface sediments of the PAs (Table 1) was interpolated in a generalized fashion from the national terrestrial gamma-ray spectral emission maps constructed from measurements during aerial overflights of the USA in the late 1970s as part of the USGS National Uranium Resource Evaluation (NURE) Program (Duval and Riggle, 1999). Although ground water rarely resides in the upper 25 cm that produces the detected gamma rays, the gamma emissions of the surficial materials can indicate the general presence of radionuclide-enriched rock material that might also be present in the subsurface. The ranges of concentrations of ^{222}Rn for the wells sampled for this study from the PAs are also presented in Table 1 as a measure of general lithological radioactivity (Tanner, 1964). The two different measures were found to correlate for felsic crystalline rock and for glacial sand and gravel aquifer systems in the northeastern USA by Ayotte et al. (2007).

2.2. Well selection

The well selection focused on providing the most areally extensive assessment of Ra occurrence among the PAs. A minimum of 30 samples were collected and analyzed for at least one isotope of Ra from each PA. Given its wide extent, the GLCL PA was sampled most (417 samples). Wells were generally sampled once for Ra analysis, primarily (83%) in the 9-a period of intensive study from 1997 to 2005. For the small subset of wells from where more than one sample was collected, the most recent Ra analysis result was used in the nationwide distribution analysis. For several PAs, no well sites, or only half the sites, were sampled and analyzed for the ^{224}Ra isotope.

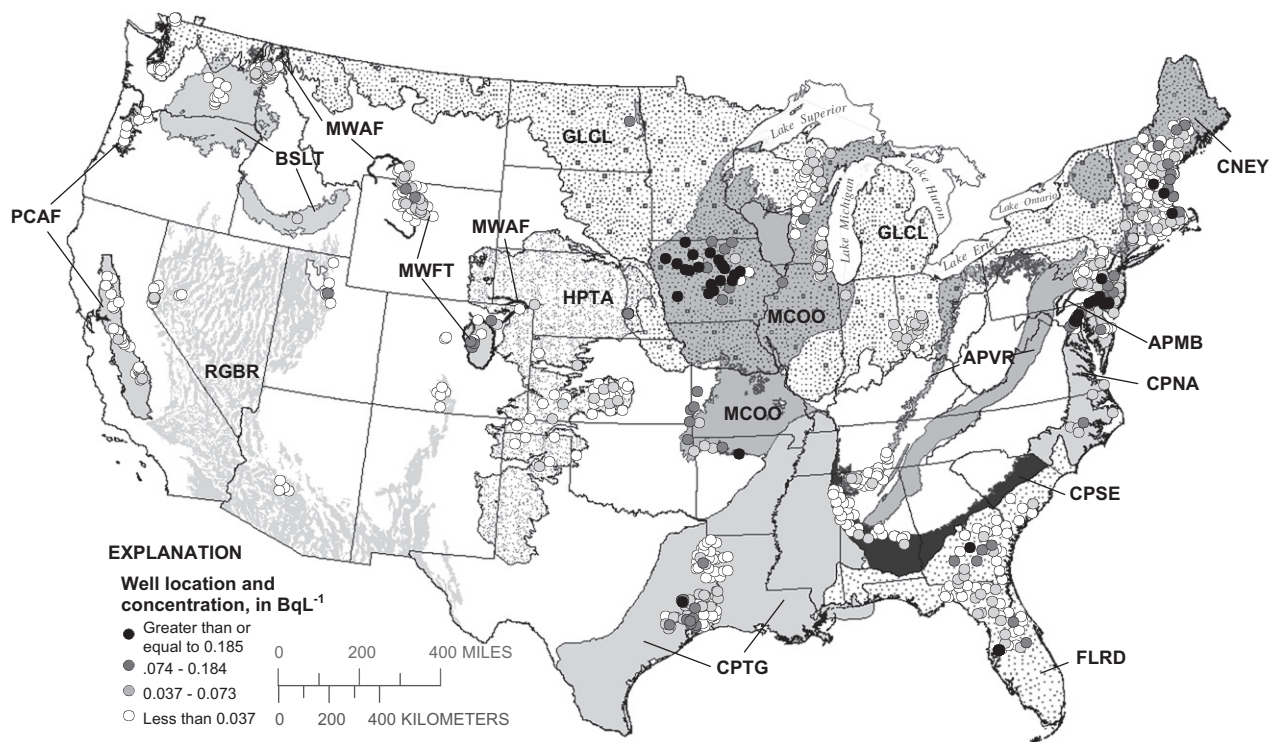


Fig. 1. Map showing concentrations of combined Ra (^{226}Ra plus ^{228}Ra) in water samples from 971 wells throughout 15 principal aquifer systems of the USA, 1987–2005. For the sake of completeness, also shown are concentration results for water samples from 22 additional wells where the concentration of only one isotope of Ra (^{226}Ra or ^{228}Ra) was determined and was greater than or equal to 0.037 Bq/L. [Shaded areas represent principal aquifer systems whose characteristics are detailed in Table 1 and are shown in color on Online Supplemental Fig. S-1 (1 Bq/L = 27.027 pCi/L).]

Table 1

General lithologic, radiologic, and water-quality characteristics of the 15 principal and other major aquifer systems in the USA evaluated in this study, 1987–2005, and distribution of the 1270 sampled wells by water use [epm, equivalent parts per million from aerial gamma survey; 1 Bq/L = 27.027 pCi/L. Well type: PS, public supply; D, domestic; O, observation; well type was not recorded at some sites. Anoxic redox group, concentration of DO < 1.0 mg/L and one additional criterion: FeHSO₄, Fe > 0.1 mg/L and SO₄ ≤ 4 mg/L; FeLSO₄, Fe ≤ 0.1 mg/L and SO₄ ≤ 4 mg/L; Mn, Mn ≤ 0.05 mg/L and Fe ≤ 0.1 mg/L; NO₃, NO₃ > 0.2 mg/L, Mn ≤ 0.05 mg/L and Fe ≤ 0.1 mg/L; suboxic, NO₃ ≤ 0.2 mg/L, Mn ≤ 0.05 mg/L, and Fe ≤ 0.1 mg/L. Mixed redox group, MixO₂–Mn, concentration of DO > 1.0 mg/L and Mn > 0.05 mg/L and Fe ≤ 0.1 mg/L. **Bold**, greatest median value; *italics*, smallest median value].

Principal aquifer system name (Code) ¹	States with samples	Predominant lithologies ²	Indicators: radioactivity concentration		General water quality ²			Number and type of wells (PS/D ⁴ /O ⁵)	
			Range, surficial equivalent U/Th (epm) ²	²²² Radon, median ² , and maximum (Bq/L) [pCi/L]	Median and range	Frequency of DO ≤ 1-mg/L cut-point (%), and common anoxic redox group (s) ³			
<i>Coastal Plain sands; commonly quartzose</i>									
Coastal Plain: North Atlantic (CPNA)	DE, MD, NC, NJ, VA	Sand and clay, some mixed w. gravel or silt	0.1–2.5/0.2–3.5	6.3 [170], 24.8 [670]	177, 17–4210	5.6, 4.0–8.0	3.0, ≤0.1–13.8	31.0, FeHSO ₄	24/25/36
Coastal Plain: Southeastern (CPSE)	AL, MS	Sand and clay, some mixed w. gravel	1.5–3.0/2.0–3.5	7.8 [212], 23.0 [623]	58, 12–843	5.4, 4.7–8.3	5.2, ≤0.1–9.3	33.0, FeLSO ₄	0/27/3
Coastal Plain: Texas Uplands, Gulf Lowlands, Mississippi Embayment (CPTG)	AR, LA, MO, MS, TN, TX	Sand and clay, some mixed w. gravel; some silt and clayey silt	0.5–2.5/1.5–3.5	11.8 [320], 321 [8670]	490, 40–1980	7.2, 4.4–8.7	0.6, ≤0.1–9.1	63.2, FeHSO ₄ , suboxic	19/75/30
<i>Basin-fill, alluvial, or fluvial sands and gravels; commonly arkosic or lithic-fragment rich</i>									
High Plains, Tertiary alluvium, fill (HPTA)	KS, NE, OK, TX	Sand and gravel; some sand and clay, sand, or clay	1.0–3.0/2.0–4.0	12.5 [339], 38.8 [1048]	562, 173–2740	7.4, 5.8–8.7	4.6, ≤0.1–8.3	33.3, FeHSO ₄ , Mn	17/19/27
Mountain West: alluvium, valley fill (MWF)	CO, ID, MT, WA, WY	Gravel, poorly sorted, mixed w. sand, silt; <i>or</i> sand, poorly sorted, mixed w. gravel and clay; cobbles; some silt, clay	0.5–4.0/1.0–4.5	20.6 [556], 50.3 [1360]	1025, 140–21,500	7.3, 6.5–8.0	3.9, 0.3–10.9	32.6, FeHSO ₄ , Mn, MixO ₂ –Mn	1/1/44
Pacific Coastal, (Central Valley, Willamette Basin) alluvium, fill (PCAF)	CA, OR	Gravel, mixed w. sand, silt; <i>or</i> some sand, mixed w. silt	0.1–3.5/0.5–4.5	22.2 [600], 88.8 [2400]	490, 100–4420	7.4, 6.7–8.4	3.5, ≤0.1–9.2	23.6, NO ₃	1/24/30
Rio Grande and Basin and Range basin fill (RGBR)	AZ, CO, NV, UT	Sand and gravel, mixed w. clay; <i>or</i> gravel and sand, mixed w. silt; cobbles; <i>or</i> sand, silt, clay	2.0–≥4.5/3.0–≥10	26.7 [723], 181 [4900]	535, 92–37,800	7.2, 6.4–8.9	4.2, 0.2–8.4	15.0, NO ₃	11/9/21
<i>Glacial sands and gravels; commonly lithic-fragment rich</i>									
Glacial sand and gravel (GLCL)	17 states ⁶	Sand; <i>or</i> gravel; <i>or</i> sand and gravel, some mixed w. silt or clay; some silt or clay	0.1–3.0/0.1–3.5	13.3 [360], 317 [8570]	462, 39–5140	7.2, 4.5–9.1	1.1, ≤0.1–12.3	49.2, FeHSO ₄ , MixO ₂ –Mn	42/196/179
<i>Sandstones and shales</i>									
Appalachian Piedmont: Mesozoic Basins (APMB)	NJ, PA	Shale, mudstone; <i>or</i> shale and sandstone; <i>or</i> some conglomerate; <i>or</i> argillite	2.5–4.5/2.5–≥5	67.3 [1820], 185 [5010]	405, 192–709	7.4, 5.6–8.0	4.2, 0.2–8.2	20.7, Mn, NO ₃	1/27/2
Mountain West Foreland/Tertiary/Cretaceous sandstones (MWF)	CO, MN, MT, ND, WY	Sandstone, some arkosic; some interbedded w. shale; some mostly shaley; <i>or</i> shale	1.0–4.0/2.0–>5	22.2 [600], 164 [4420]	1920 , 607–14,490	7.9, 6.2–9.3	0.2 , ≤0.1–8.0	64.9, suboxic, FeHSO ₄ , NO ₃	0/24/16
<i>Intermixed sandstones and carbonate rocks</i>									
Appalachian Plateau: Valley and Ridge and Mississippian Limestones (APVR)	AL, PA, TN	Shale; some interbedded w. sandstone, siltstone; <i>or</i> limestone, some w. chert; <i>or</i> residuum; <i>or</i> rare sandstone	1.0–4.5/1.0–≥5	33.1 [896], 223 [6020]	188, 18–1500	6.8, 4.5–8.0	5.2, 0.1–11.6	13.8, FeHSO ₄	4/35/20
<i>Carbonate rocks</i>									
Floridan, and Surficial (FLRD)	FL, GA, NC, SC	Limestone; <i>or</i> limey sand	0.1–3.0/0.2–4.0	15.9 [430], 199 [5365]	346, 27–8680	7.4, 6.3–8.5	0.3, ≤0.1–	71.4, suboxic, FeHSO ₄ , FeLSO ₄ ,	4/71/27

(continued on next page)

Table 1 (continued)

Principal aquifer system name (Code) ¹	States with samples	Predominant lithologies ²	Indicators: radioactivity concentration		General water quality ²				Number and type of wells (PS/D ³ /O ⁵)
			Range, surficial equivalent U/Th (eppm) ²	²²² Radon, median ² , and maximum (Bq/L) [pCi/L]	Median and range	Frequency of DO ≤ 1-mg/L cut-point (%), and common anoxic redox group (s) ³	SC (µS/cm)	pH	
Carbonate rocks (continued)									
Mid-continent and Ozark Plateau Cambro-Ordovician dolostones (MCOO)	AR, IA, KS, MO, OK	Dolomite; <u>gr</u> sandstone; <u>gr</u> interbedded dolomite and sandstone	Minimal surficial exposure	5.9 [160, 50.7 [1370]	854, 225–2340	7.1, 6.6–7.8	8.8 NO ₃	93.8, FeHSO ₄ , suboxic	48/0/1
Crystalline (felsic to intermediate) igneous and metamorphic rock and basalt (CNEY)	CT, MA, ME, NH, RI, VT	Metamorphic or igneous rocks: schist, granite-gneiss, tonalite, granite, syenite	2.0–4.5/3.0–≥10	81.4 [2200], 7955 [215,000]	207, 36–1480	7.6, 5.1–9.3	1.0, ≤0.1–10.5	53.9, suboxic, FeHSO ₄	0/87/2
Basalt (BSLT)	CT, HI, ID, WA	Basalt	0.1–1.0/0.1–1.5	4.1 [110], 174 [4700]	340, 42–1460	7.2, 6.3–8.3	7.7, 4.4–9.2	oxic only	30/1/5

¹ Codes used in this report differ slightly from those of Lapham et al. (2005) and DeSimone (2009); classification is discussed in the Online Supplemental Information.

² Water quality, general radioactivity, and lithologic information is only for wells from which samples were analyzed for Ra, or includes only the approximate sampled area.

³ See McMahon and Chapelle (2008) for detailed description. For this report, cut-points for groups were modified as follows: DO, 1 mg/L; NO₃, 0.2 mg/L.

⁴ D: Domestic wells, includes commercial, commercial/industrial/fire-protection, and recreational uses.

⁵ O: Observation wells, includes irrigation and stock supply wells not used for drinking water in agricultural areas.

⁶ Includes 17 states: AK, CT, ID, IL, IN, MA, ME, MI, MN, NH, ND, OH, PA, RI, VT, WA, WI.

Of the 1270 sampled wells, the well-use distribution (202 public drinking-water supply, 621 domestic supply, and 443 shallow observation wells) indicates a slight bias toward oversampling of the shallow resource (Table 1). This bias was acceptable because the focus of the study was the potable shallow resource rather than all water resources (as opposed to Scott and Barker (1962) who did sample deep saline irrigation and stock wells). A limitation shared with previous national surveys (Longtin, 1988; Focazio et al., 2001) was that small water-supply systems relying on ground water in the western USA were least sampled.

2.3. Sample collection

Raw (untreated) samples of water were collected and filtered (0.45 µm) as close to the wellhead as possible after the pump had been running for about 30 min or more and values of measured field properties (water temperature, dissolved-O₂ (DO) content, pH and specific conductance (SC)) were stable (Koterba et al., 1995). The 1 L samples for determination of each Ra isotope to be analyzed were acidified to pH < 2 with ultra-pure HNO₃. Samples were shipped overnight to the analyzing laboratory (USGS National Water Quality Laboratory in Denver, CO; USGS National Research Program Isotope Laboratory in Reston, VA; or contract laboratories). The 122 sequential-replicate and field- and equipment-blank samples were collected randomly using the same procedures as the environmental samples. Not every sample or every replicate sample was analyzed for all the Ra isotopes.

2.4. Analytical methodology

Samples from all but 4 of the 1270 wells were analyzed for ²²⁶Ra or ²²⁸Ra, mostly using USEPA-approved techniques (Table 2). Alpha spectrometry (Sill et al., 1979; Sill and Williams, 1981; Sill, 1987; Morvan et al., 2001) was the method used to determine the concentration of ²²⁴Ra and was the second most common technique used to determine concentrations of ²²⁶Ra. The alpha spectrometry focused on alpha radiation emitted at specified energy levels for ²²⁴Ra and ²²⁶Ra (5.686 and 4.785 million electron volts, respectively). A 100-min count was long enough to typically achieve an expected (pre-defined) minimum detectable concentration (MDC) of about 0.037 Bq/L (1 pCi/L) or less for sample aliquots of up to 1 L. Cation-exchange chromatography (Bio-Rad AG 50W-X8 resin) was used to separate the Ra from the water, which was then eluted with 8-M HNO₃, and was co-precipitated with barite using a seeding suspension to ensure the formation of uniform fine-grained crystals (Sill and Williams, 1981; Sill, 1987; Focazio et al., 2001; Nour et al., 2004; Arndt, 2010). Chemical separation by forming the Ba–Ra–SO₄ precipitate was completed within about 48 h for ²²⁴Ra and ²²⁶Ra analysis by alpha spectrometry, with counting proceeding immediately thereafter. A radioactive tracer (¹³³Ba) was added to the samples to determine yield and was analyzed by gamma spectroscopy. For a subset of 135 mostly oxic and alkaline water samples collected from the western USA in 2004, the ²²⁴Ra was initially extracted for alpha-spectroscopic analysis using Mn-coated fibers (Kim et al., 2001) as the water chemistry (oxic, alkaline) was optimal for this application.

Raw values, including negative values for radionuclides, were reported and are stored in the USGS National Water Inventory System (NWIS) database. Missing raw values are primarily those censored for low concentrations of ²²⁸Ra and low gross alpha-particle activity, mostly determined before 1997. Evaluation of measurement performance for single measurements at individual sites used the raw values (Currie, 1968; Troyer et al., 1991; McCurdy et al., 2008).

Water samples from most wells were analyzed for concentrations of U and ²²²Rn, and for gross alpha- and beta-particle

Table 2

Description of methods for analysis for radionuclides and radioactivity in 1270 water samples from 15 principal aquifer systems in the USA, 1987–2005. [LRL, laboratory reporting level; SSMDC, sample specific minimum detection concentration performance indicator; 1 Bq/L = 27.027 pCi/L].

Constituent	Number of analyses	Typical range of LRL or SSMDC	Method and EPA method number	Citation
²²⁶ Radium	528	0.0037–0.0074 Bq/L (0.1–0.2 pCi/L)	Barium-sulfate co-precipitation and ²²² Radon de-emanation, with Rn cold trapped on charcoal and counted with alpha scintillation (EPA 903.1)	Krieger and Whittaker (1980)
²²⁶ Radium	143	0.0074–0.0259 Bq/L (0.2–0.7 pCi/L)	Low-background proportional count from planchet after barium sulfate co-precipitation (EPA 903.0)	Krieger and Whittaker (1980)
²²⁶ Radium	525	0.0074–0.0148 Bq/L (0.2–0.4 pCi/L)	Alpha-spectroscopy counting after barium-sulfate co-precipitation	Sill and Williams (1981), Sill and Olson (1970), Sill (1987)
²²⁴ Radium	645	0.0111–0.0296 Bq/L (0.3–0.8 pCi/L)	Alpha-spectroscopy counting after either barium-sulfate co-precipitation or manganese-fiber extraction	Sill et al. (1979), Sill and Williams (1981), Kim et al. (2001)
²²⁸ Radium	1042	0.01295–0.0296 Bq/L (0.35–0.8 pCi/L)	Low-background proportional beta counting of ²²⁸ Ac ingrowth after Barium co-precipitation (EPA 904.0)	Krieger and Whittaker (1980)
Gross alpha and beta (48–72-h holding time or 72-h holding time) or conventional with no holding time and 30 days or more elapsed time permissible before analysis)	765 (135 with 72-h holding time)	About 0.0925–0.148 Bq/L (2.5–4 pCi/L)	Low-background proportional count after evaporation for low dissolved solids ground water (EPA 900.0)(ASTM, 1999), or after co-precipitation for high dissolved solids samples or brine (EPA 900.1) using ²³⁰ Th and ¹³⁷ Cs as the standards	Krieger and Whittaker (1980), Parsa (1998), ASTM (1999)
Uranium (mass)	1237	0.1–1.0 µg/L	Inductively coupled plasma-mass spectrometry (EPA 200.8)	Faires (1993)
²²² Radon	1135	1.48–2.59 Bq/L (40–70 pCi/L)	Liquid scintillation (EPA 913.0)	Pritchard and Gesell (1977)

activities (Table 2), with the gross alpha-particle activity determined within a 48–72-h holding time (Parsa, 1998) for 135 samples collected in 2004. Samples from all but two of the 1270 wells were analyzed for a suite of major and trace inorganic chemical constituents using standard techniques (Faires, 1993; Fishman and Friedman, 1989).

2.5. Quality assurance and limitations of the analytical methods

Because a large data set collected over more than 15 a is evaluated in this study, conservative interpretations of data-quality criteria were applied. The sample-specific minimum detectable concentration (SSMDC) “performance indicator” was determined on the basis of instrument operating conditions at the time of measurement, and is typically twice the magnitude of the critical level for detection (Currie, 1968). The SSMDC was used as a conservative criterion to evaluate raw, unrounded values with respect to whether they were considered to be a detectable and a suitably quantifiable concentration. Radionuclide concentration values less than the SSMDC were considered too low in concentration for satisfactory quantification within performance expectations, and were conservatively equated with non-detection.

The quality-assurance data and performance criteria collected in this study indicate that, for the analytical techniques used, there were limitations to precise quantification and detection for ²²⁴Ra and ²²⁸Ra at concentration ranges of 0.011 to about 0.030 Bq/L (0.3–0.8 pCi/L) that are typical of many environmental samples (Online Supplemental Table S-1). The 0.030–0.037-Bq/L level is reasonable for assuming detection for ²²⁴Ra and ²²⁸Ra. Concentrations of ²²⁶Ra when determined by the Rn de-emanation technique were quantifiable, precise, and reproducible at levels ≥ 0.0037 Bq/L (0.1 pCi/L), and at about levels 0.011 Bq/L when determined by alpha spectroscopy. Beta particles are more difficult to detect than alpha particles and the background count cannot be maintained at levels as low as those achievable for measurement of alpha particles; thus, the measurement of ²²⁸Ra by the beta-counting

technique was typically more imprecise and had more difficulty in meeting the (pre-determined) MDC of 0.037 Bq/L than the measurement of ²²⁶Ra, an observation that is consistent with those of previous studies (Cothorn et al., 1984; Focazio et al., 2001). The resulting disparity in performance is a limitation of the analytical approach. Detections of ²²⁴Ra in equipment blank samples are assumed to indicate analytical “noise” in the laboratory associated with occasional poor performance of the alpha-spectrometric technique for ²²⁴Ra analysis because ²²⁶Ra and ²²⁸Ra were not detected in equipment blanks. Data for replicate samples indicate the analytical results are reproducible within the bounds of the precision estimate performance constraints of the analytical techniques (about $\pm 22 \pm 25\%$ for ²²⁶Ra and ²²⁸Ra), though uncertainty was largest for ²²⁴Ra analysis (near $\pm 34\%$; Online Supplemental Table S-2).

2.6. Data analysis

The Ra concentration data set is limited by quantification issues at the low end of concentrations and a long tail of high-end concentrations, and the use of non-parametric (rank transform) statistics was most appropriate (Helsel and Hirsch, 1992). The significance level for all the non-parametric statistical tests was set equal to 0.05. Concentrations lower than the SSMDC including reported negative values were assigned a uniform minimum value that was less than the smallest Ra isotope value detected at a concentration that was greater than the associated SSMDC (²²⁴Ra, 0.002 Bq/L (0.054 pCi/L), ²²⁶Ra, 0.0005 Bq/L (0.014 pCi/L), and ²²⁸Ra, 0.013 Bq/L (0.37 pCi/L)) before ranking for non-parametric statistical tests. For the small number of Ra analyses, mostly but not exclusively for ²²⁸Ra for which a censored result (commonly the 0.037 Bq/L MDC) was reported, the censored results were similarly treated as a uniform minimum value, but were set less than the smallest detected Ra isotope. For ²²⁸Ra, 0.0037 Bq/L (0.101 pCi/L) was used. For plotting Ra isotope population distributions in “boxplot” format and for use with the non-parametric statistics, the same lowest ranked values

that represented concentrations less than the SSMDC were used. No other manipulation, censoring, or screening of the raw-data values was attempted in order to avoid biases resulting from the omission of low concentrations that might change the true statistical distribution of the population of Ra-concentration data (Helsel and Hirsch, 1992). In a similar fashion, for each ancillary chemical constituent, the highest laboratory reporting level (LRL) was determined, and the Spearman correlation coefficients were calculated with the results less than any of the LRLs ranked equally as the lowest value. For the wells sampled for determination of Ra concentration, about 50% and 1% of the results were below the highest LRL for U and ^{222}Rn , respectively (1 $\mu\text{g/L}$ and 2.59 Bq/L (70 pCi/L), respectively). For Ra, the raw, unrounded values of concentrations were used to compute standard distributional statistics for the entire data set and for subgroups even if the concentrations were lower than the SSMDC. The standard distributional statistics were also computed for the SSMDC values to provide a measure of the degree of overlap among the population distributions and thereby assess the general level of confidence in the results.

The non-parametric group-comparison tests, the Kruskal–Wallis and Tukey–Kramer test, were used to identify which group means significantly differed in Ra concentration distributions from among the groups of data (Helsel and Hirsch, 1992). The differences among the higher and lower ranked group reflect the difference in the central tendencies of the population distribution of the groups about the mean rank, but do not necessarily indicate the group that has the highest individual concentration. Classification groups included the PAs and groups of PAs (combined surrogate for geology and hydrology) and specific geochemical-classification groups. Results were ranked and coded sequentially, with the group with the highest mean of ranks coded “A”, the group with the next highest mean ranks was coded “B”, then “C”, and so on; overlapping groups were coded with the letter for each overlapping group, “BC”, for example, or “BD”, representing overlap with groups B and C, and B, C, and D, respectively. To simplify representation of overlapping groups in data tables, only the first and last letters of the range of overlapping groups are listed.

Principal components analysis (PCA) was used to reduce the dimensionality of the multiple correlations determined among the concentrations of Ra and other chemical constituents. The individual explanatory variables (constituent concentrations) are represented by loadings into individual principal components; the highest loadings are attributed to the explanatory variables that account for the most variance within the individual principal component. The first principal component accounts for as much variation in the data set as possible. Each successive component attempts to account for the data variance not explained by previous components. The 22 constituents included in the analysis (major ions, selected trace elements, and water properties) were measured in at least 85% of the samples. The concentrations of Sr, an alkali-earth trace cation, were not included in the analysis despite strong correlation with concentrations of Ra in nearly all PAs because Sr was analyzed in only 61.5% of samples. Concentrations were normalized by converting to logarithmic values. Rotations were not applied as variance of the data set was much larger than analytical error or variance within individual explanatory variable populations.

The statistically most significant component with which combined Ra concentration was correlated most strongly was determined for this study. The typical loading coefficient values, (r) for combined Ra, were $\geq [0.20\text{--}0.40]$, with the absolute values of the coefficients represented with brackets; the full range of the loading coefficient values considered were $[0.126\text{--}0.433]$ for the entire data set, and for individual PAs. The minimum eigenvalue for any component considered initially was 2.0; two reported components with values as low as 1.34 were included after further consideration. A limitation important to note is that a given princi-

pal component may be indicative of more than one geochemical factor. Further, any one component, or even a group of components, may not be exhaustive of all possible geochemical conditions in which Ra might be present within a given PA, and the significance of lesser components were not evaluated. The non-parametric Spearman's rank correlation test was used to characterize relationships among the Ra radionuclide concentrations and the concentrations of ancillary chemical constituents for the overall data set and for the PAs and geochemical groups to further delineate specific geochemical relationships.

Ratios of radionuclide concentrations were determined using raw values only when concentrations were greater than their respective SSMDCs. Ratios may have substantial bias when the raw concentrations used are below the SSMDC. The difference in performance of the analytical techniques for the Ra isotopes likely results in potential positive population bias for tabulations of $^{228}\text{Ra}/^{226}\text{Ra}$ activity ratios, for example (see discussion in the Online Supplemental Information), the isotopic ratios are discussed in qualitative fashion, with no statistical tests applied. Because of the analytical limitation, geological groups that had low Ra concentrations were not characterized or were poorly characterized in terms of Ra isotope ratios.

The redox classification of McMahon and Chapelle (2008) was used for general descriptive purposes of PA geochemistry (Table 1). The classification was modified slightly for purposes of describing geochemical environments relating to Ra occurrence in that all samples with $\text{DO} \leq 1$ mg/L (instead of $\text{DO} \leq 0.5$ mg/L) were considered suboxic or anoxic, and samples with $\text{DO} \leq 1$ mg/L and NO_3 concentrations >0.2 mg/L (instead of >0.5 mg/L) were considered NO_3 reducing. Some samples were classified into the anoxic groups that might otherwise have been within the “mixed” redox groups of McMahon and Chapelle (2008), but this slight change in criteria emphasizes the anoxic component. Samples with $\text{DO} \leq 1$ mg/L were prevalent in many PAs. Major-ion compositional variability assessment was simplified to characterization of the predominant anion; anion concentrations were converted to (milli)equivalents/L (Back, 1966), and the anion with the highest equivalence was determined to be predominant. Thermodynamic calculations of water sample saturation with respect to barite (solubility product $10^{-9.97}$) were completed using a spreadsheet with appropriate chemical activity factors and were spot-checked with the geochemical modeling program PHREEQC (Parkhurst and Appelo, 1999). Minor high bias was occasionally noted for spreadsheet results likely because of underestimation of ion activity coefficients and complexation of species.

3. Radium occurrence in the water from the principal aquifer systems

3.1. Combined radium (sum of ^{226}Ra plus ^{228}Ra)

Concentrations of combined Ra in 39 (4.02%) of the 971 water samples for which both ^{226}Ra and ^{228}Ra concentrations were determined and summed were equal to or greater than the MCL (Figs. 1 and 2; Online Supplemental Table S-3). Of the 39 wells where the combined Ra concentrations were greater than the MCL, ^{226}Ra was the larger of the two isotopes in 21 (54%). This frequency of occurrence of concentrations of ^{228}Ra plus ^{226}Ra greater than the USEPA MCL is consistent with the general level of frequency of occurrence in excess of the respective MCLs for other important trace element constituents collected throughout the PAs in the USA, including U and As (1.7% and 6.8% frequency, respectively, in samples from domestic wells; DeSimone, 2009). Concentrations of combined Ra were greater than or equal to 0.148 Bq/L (4 pCi/L), 0.111 Bq/L (3 pCi/L), and 0.037 Bq/L (1 pCi/L) for 50 (5.15%), 63

(6.49%), and 260 (26.8%), respectively, of the 971 samples for which both ²²⁶Ra and ²²⁸Ra concentrations were measured (Online Supplemental Table S-3). When considering the larger data set of the 1266 water samples analyzed for one or both of these Ra radioisotopes, 40 (3.16%) were equal to or greater than the MCL, because in one sample the ²²⁶Ra concentration alone exceeded the MCL but the concentration of ²²⁸Ra was not measured, and concentrations exceeded 0.148 Bq/L for a total of 52 (4.10%) of the 1266 samples.

Concentrations of combined Ra greater than the MCL were mostly found in the eastern and central USA (Fig. 1). The maximum concentration of combined Ra was 0.752 Bq/L (20.4 pCi/L) in water from the Coastal Plain–North Atlantic PA. The combined-Ra MCL was exceeded in 7 PAs, listed in decreasing order of frequency of occurrence: Midcontinent and Ozark Plateau Cambro-Ordovician dolomites and sandstones (MCOO), Coastal Plain–North Atlantic quartzose sand (CPNA), Floridan (phosphatic) limestone (FLRD), felsic crystalline rock (granitic, metamorphic) in New England (CNEY), Appalachian Piedmont–Mesozoic Basins (APMB), Coastal Plain–Texas uplands–Gulf Coast Lowlands–Mississippi Embayment (CPTG), and glacial sands and gravels (GLCL) (Figs. 1 and 2; Online Supplemental Table S-3). Of the 8 broad geological groups (Table 1), the concentrations of combined Ra greater than the MCL were found in 5, listed in decreasing order of frequency of occurrence: carbonate rocks, quartzose coastal sands, lithified sandstones and shales, crystalline felsic rocks, and glacial sands and gravels.

The result of the Tukey–Kramer group comparison tests for the PAs (Table 3) indicate that for concentrations of combined Ra, 4 PAs are grouped sequentially as having the highest mean ranks (Group A and overlapping groups): the MCOO, the CPNA, the FLRD, and the Mountain West Foreland Basin Tertiary and Cretaceous

sandstones (MWFT). These 4 PAs have combined-Ra concentrations ≥0.037 Bq/L in more than 35% of the samples, including in 87% and 67% of the samples from the MCOO and CPNA PAs, respectively. Concentrations of combined Ra were greater than or equal to the MCL in more than 63%, 20% and 4.4% of the samples from the MCOO, CPNA, and FLRD PAs, respectively (Figs. 1 and 2), and were greater than or equal to 0.148 Bq/L in 73% and in 28% of the samples from the MCOO and CPNA PAs, respectively. No sample exceeded the combined Ra MCL from the MWFT PA, but concentrations exceeded 0.074 Bq/L in 12.9% of samples.

Six PAs formed the group with the next (second) highest mean ranks (Tukey–Kramer groups, B and overlapping groups): the CNEY, APMB, CPTG, GLCL, High Plains Tertiary alluvium (HPTA), and Coastal Plain – Southeastern (CPSE). The second-tier group includes the remaining 4 PAs with at least one sample with combined Ra concentration greater than the MCL. More than 25% of the samples for three of these PAs (CNEY, CPTG, HPTA) have a combined-Ra concentration ≥0.037 Bq/L, and the frequency of such samples was 23.3% for the APMB PA (Fig. 2; Online Supplemental Table S-3).

The basalt (BSLT) PA has the lowest mean rank and only one sample contained combined Ra at a concentration ≥0.037 Bq/L. The Appalachian Plateau Valley and Ridge and Mississippian limestones (APVR), Pacific Coastal alluvium and fill (PCAF), Mountain West alluvium and fill (MWAFF), and Rio Grande-Basin and Range (RGBR) PAs have the next-to-lowest mean ranks, but cannot be statistically distinguished from the PAs whose mean ranks also are among the next highest group. For these 4 PAs, combined-Ra concentrations ≥0.037 Bq/L occurred with low frequency (5.1–21.4%).

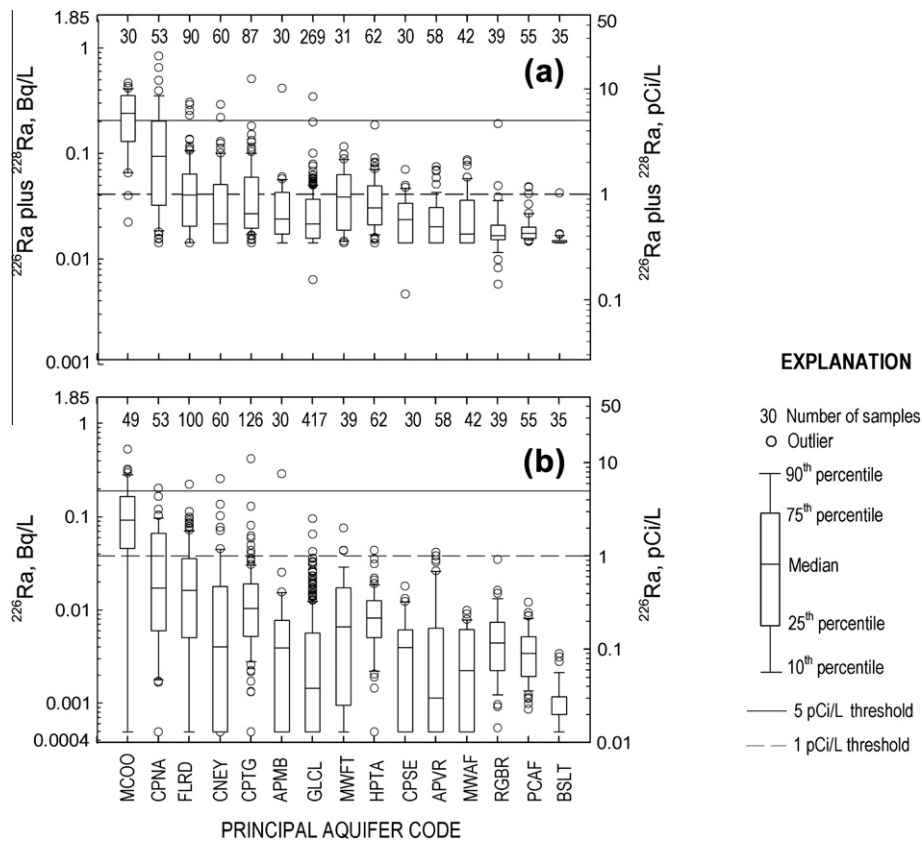


Fig. 2. Boxplots showing concentrations of (a) ²²⁶Ra plus ²²⁸Ra, and (b) ²²⁶Ra, grouped by principal aquifer systems of the USA in decreasing order of ²²⁶Ra concentration, 1987–2005. Note that for plotting purposes, values for ²²⁸Ra concentration were censored below the lowest detectable concentration that satisfactorily met performance criteria. The number of samples is indicated above the boxplots. [Principal aquifer abbreviations and descriptions are provided in Table 1 and locations are shown in Fig. 1.]

Table 3
Differences in Ra concentration by geochemical conditions (pH and redox and dominant anion) and geology (principal aquifer and matrix type) as determined by the Tukey–Kramer statistical test for 1270 water samples from 15 principal aquifer systems in the USA, 1987–2005. [**BOLD**, highest group; –, no differences; N, no analyses. Group code sequence: highest mean of ranks is “A”, next highest mean ranks, “B”, then “C”, and so on; overlapping groups include the letters for each overlapping group (examples: “BC” and “BD” represent overlap with groups B and C, and B, C, and D, respectively).]

Group	²²⁶ Radium + ²²⁸ Radium	²²⁶ Radium	²²⁸ Radium	²²⁴ Radium	Uranium	²²² Radon
<i>Grouping by pH and redox as delimited by concentration of dissolved oxygen (DO) in mg/L</i>						
pH ≤ 6; DO ≥ 1	A	A	A	–	C	A
pH ≤ 6; DO < 1	A	A	AB	–	C	B
pH > 6; DO < 1	A	A	B	–	B	B
pH > 6; DO ≥ 1	B	B	B	–	A	A
<i>Grouping by predominant anion</i>						
Sulfate	A	A	A	A	A	–
Nitrate	AB	AB	A	A	C	–
Chloride	B	B	B	B	C	–
Bicarbonate	B	B	B	B	B	–
<i>Grouping by principal aquifer code</i>						
MCOO	A	A	A	N	CE	GI
CPNA	AB	AB	B	A ^a	DG	GI
FLRD	AC	AC	BE	BD ^{a,b}	CD	CF
MWFT	AD	AE	B	AB	BD	BE
CPTG	BD	AC	B	AC ^a	DF	FH
HPTA	BD	AD	B	AC	AB	DG
APMB	BE	BG	BC	BD ^b	AC	AB
CNEY	BE	BF	BE	AD ^b	BD	A
GLCL	BE	EG	BD	BD ^{a,b}	CD	CF
CPSE	BE	DG	BD	BD	EG	FI
APVR	CE	DG	BE	BD ^b	EG	BC
MWAF	CF	DG	BE	A	A	BE
PCAF	CF	CG	BE	A ^a	AB	BD
RGBR	CF	BF	BE	AB	A	AC
BSLT	DF	EG	BE	BD ^{a,b}	DG	GI
<i>Grouping by predominant aquifer matrix type</i>						
Carbonate rocks	A	A	AB	CD ^{a,b}	C	D
Coastal Plain sands	BC	B	A	AC	D	D
Sandstones	BC	C	A	AD	B	B
Crystalline	BD	C	AC	BD ^b	B	A
Glacial sands	BD	D	AB	BD ^{a,b}	C	C
Alluvial sands	CD	C	AC	AB	A	B
Sandstone/carbonate	CD	CD	AC	CD ^b	D	B
Basalt	E	D	AC	BD ^{a,b}	D	E

^a The ²²⁴Ra radionuclide not analyzed in about 50% or more of samples.

^b More than 65% of ²²⁴Ra concentration < sample specific minimum detection concentration (SSMDC).

3.2. Individual radium radionuclide concentrations

Concentrations of ²²⁶Ra were greater than or equal to the 0.185 Bq/L MCL in 13 (1.09%) of the 1195 samples analyzed for this isotope, exceeded 0.111 Bq/L in 33 (2.76%) samples, and exceeded 0.037 Bq/L in 105 (8.79%) samples (Online Supplemental Table S-3). In terms of elevated occurrence of the individual ²²⁶Ra isotope, 4 PAs, the MCOO, CPNA, FLRD and CPTG tended to have the highest mean rank values, though the mean rank values of two more PAs, those of the MWFT and HPTA also overlapped with the range of the first four (Table 3). The maximum concentration of ²²⁶Ra, 0.518 Bq/L (14.0 pCi/L), was measured in water from the MCOO PA. Of the samples in which the ²²⁶Ra concentrations were greater than or equal to the MCL, more than half were from the MCOO PA. Concentrations of ²²⁶Ra were greater than 0.037 Bq/L in 79.6% of the samples from the MCOO, in 37.7% of the samples from the CPNA, and in 22.0% of the samples from the FLRD PA.

Concentrations of ²²⁸Ra were greater than 0.185 Bq/L in 8 (0.77%) of the 1042 samples analyzed for this isotope. Concentrations exceeded 0.037 Bq/L in 147 (14.1%) samples, 0.074 Bq/L in 47 (4.51%), and exceeded 0.111 Bq/L in 23 (2.21%). The MCOO PA had the highest overall mean rank concentration for ²²⁸Ra, with 4 PAs, the CPNA, CPTG, MWFT and HPTA, forming the group with the next highest values (Table 3). All the remaining groups of PAs had population distributions about the mean rank that were lower than, but in terms of statistical significance, over-

lapped with, that of these 4. The maximum concentration of ²²⁸Ra, 0.688 Bq/L (18.6 pCi/L), was measured in water from the CPNA PA. Half of the eight samples in which the concentration of ²²⁸Ra was greater than or equal to the MCL were from the CPNA PA, with the FLRD PA and the GLCL PA (in New England) also having concentrations of that magnitude (Fig. 3). The overall concentration distributions for ²²⁸Ra and ²²⁶Ra are generally similar to that observed for the NIRS study (Longtin, 1988).

Concentrations of ²²⁴Ra were greater than or equal to 0.185 Bq/L in two (0.31%) of the 645 samples analyzed for this isotope. Concentrations of ²²⁴Ra were greater than or equal to 0.037 Bq/L in 42 (6.51%) samples, and exceeded 0.111 Bq/L in 7 (1.08%) samples (Fig. 3; Online Supplemental Table S-3). The maximum ²²⁴Ra concentration of 0.392 Bq/L (10.6 pCi/L) was determined in water from Quaternary alluvial deposits in the Mountain West (MWAF PA) (Fig. 4). In terms of elevated occurrence of the individual ²²⁴Ra isotope, the CPNA PA (quartzose sand) had the highest overall mean rank concentration along with the MWAF and PCAF PAs (alluvium and basin fill sands), with three additional PAs, the CPTG, HPTA and MWFT (coastal and fluvial sands, and sandstone) forming the group with the next highest set of concentrations (Table 3). Concentrations of ²²⁴Ra were commonly greater than the corresponding SSMDCs in these 6 PAs with the greatest mean ranks. The concentrations of ²²⁴Ra exceeded 0.074 Bq/L in the CPNA, MWAF and MWFT PAs in more than 21% of the samples, and exceeded 0.111 Bq/L in 15% of the samples from the CPNA. Of the eight broad

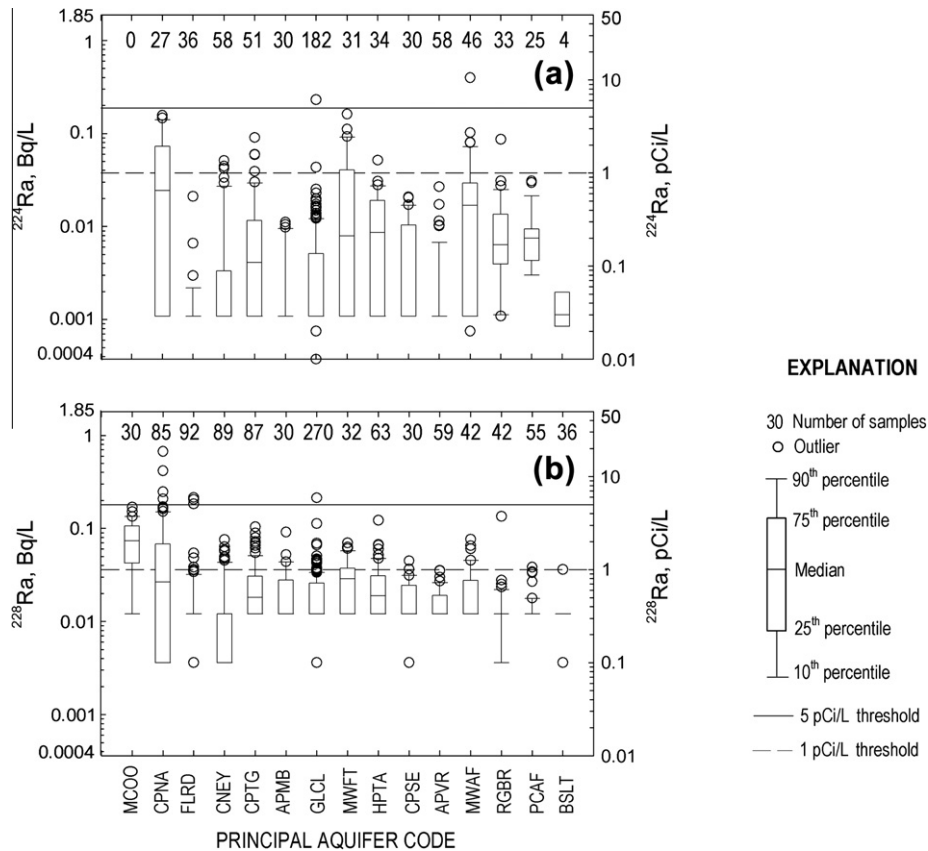


Fig. 3. Boxplots showing concentrations of (a) ^{224}Ra , and (b) ^{228}Ra , grouped by principal aquifer systems of the USA in decreasing order of ^{226}Ra concentration (shown in Fig. 2), 1987–2005. Note that for plotting purposes, values for ^{224}Ra and ^{228}Ra concentration were censored below the lowest detectable concentration that satisfactorily met performance criteria (see text). The number of samples is indicated above the boxplots. [Principal aquifer abbreviations and descriptions are provided in Table 1 and locations are shown in Fig. 1.]

geological groups (Table 1), the highest concentrations of ^{224}Ra were found in sands: the quartzose coastal sands, arkosic and lithic-fragment rich alluvial and basin-fill sands, and lithified sandstones, though the sample distribution did under-represent some of the other lithologic groups. Only 44.9% (172 of 383) samples from 5 PAs (MCOO, CPNA, FLRD, CNEY, and CPTG) with generally the highest concentrations of the other Ra isotopes were analyzed for ^{224}Ra . The cumulative frequency distribution of ^{224}Ra of Focazio et al. (2001) generally indicated greater concentrations than those observed in this study, with about 20% of their samples equaling or exceeding 0.185 Bq/L; many of those samples were, however, from the area of the MCOO PA, and no sample was analyzed for ^{224}Ra concentration from there in this study. The current study may, then, under-report the actual frequency of elevated ^{224}Ra concentration occurrence in terms of the national population distribution because analysis for ^{224}Ra was particularly sparse in some PAs where concentrations of the other Ra isotopes were high.

3.3. Correlations among individual radium radionuclide concentrations

The concentrations of ^{228}Ra correlated significantly and reasonably strongly with those of ^{224}Ra and ^{226}Ra (Spearman's rank correlation coefficient, +0.236 and +0.326, respectively). The concentration ratio of $^{228}\text{Ra}/^{226}\text{Ra}$ was variable and the concentrations plotted on a scatter diagram did not cluster closely about a line with a 1:1 slope (Fig. 5). For ^{228}Ra and ^{226}Ra concentrations greater than 0.037 Bq/L, some samples were strongly enriched in one isotope relative to the other, and the individual $^{228}\text{Ra}/^{226}\text{Ra}$ ratios ranged widely (from 0.124 to 10.21), and even though some samples did

group closely about the 1:1 line, scatter was still substantial. The slope of the best fit line for ^{228}Ra as a function of the ^{226}Ra (activity) concentrations for only those values higher than 0.037 Bq/L was not statistically significant. The generalized slope of the best fit line for samples with both isotope concentrations greater than the associated SSMDCs was 0.35 with an intercept, 0.4 Bq/L (not shown in Fig. 5). The distribution was such that when both radionuclides were detected at concentrations that were less than 0.037 Bq/L, relative differences among concentrations were commonly large and the concentrations of ^{228}Ra were commonly greater than concentrations of ^{226}Ra (Fig. 5). The median $^{228}\text{Ra}/^{226}\text{Ra}$ activity (concentration) ratio was 2.58 for all the samples where both concentrations were detectable, but was 1.02 when both detected concentrations were greater than or equal to 0.037 Bq/L. The collected data from this study indicates that the concentration of co-occurring ^{228}Ra cannot be reasonably estimated solely on the basis of the more readily measurable concentration of ^{226}Ra on the national scale. Perhaps in those individual PAs where detection frequencies for both the isotopes are high (listed below), detailed studies may provide assessment of the degree to which the ratios are constrained locally, allowing for possible development of a somewhat more useful “screening” tool using a simple regression model with the concentration result for one isotope to estimate the concentration of the other. Of the 971 samples in which the concentrations of ^{228}Ra and ^{226}Ra were determined, both were greater than the respective SSMDCs in 282 samples (29.0%), with detection and quantification of ^{228}Ra being the limiting factor most often. The concentrations of ^{228}Ra and ^{226}Ra were both greater than the respective SSMDCs in 45% or more of samples from only 4 PAs, listed in order of decreasing frequency: MCOO, CPNA, HPTA, and

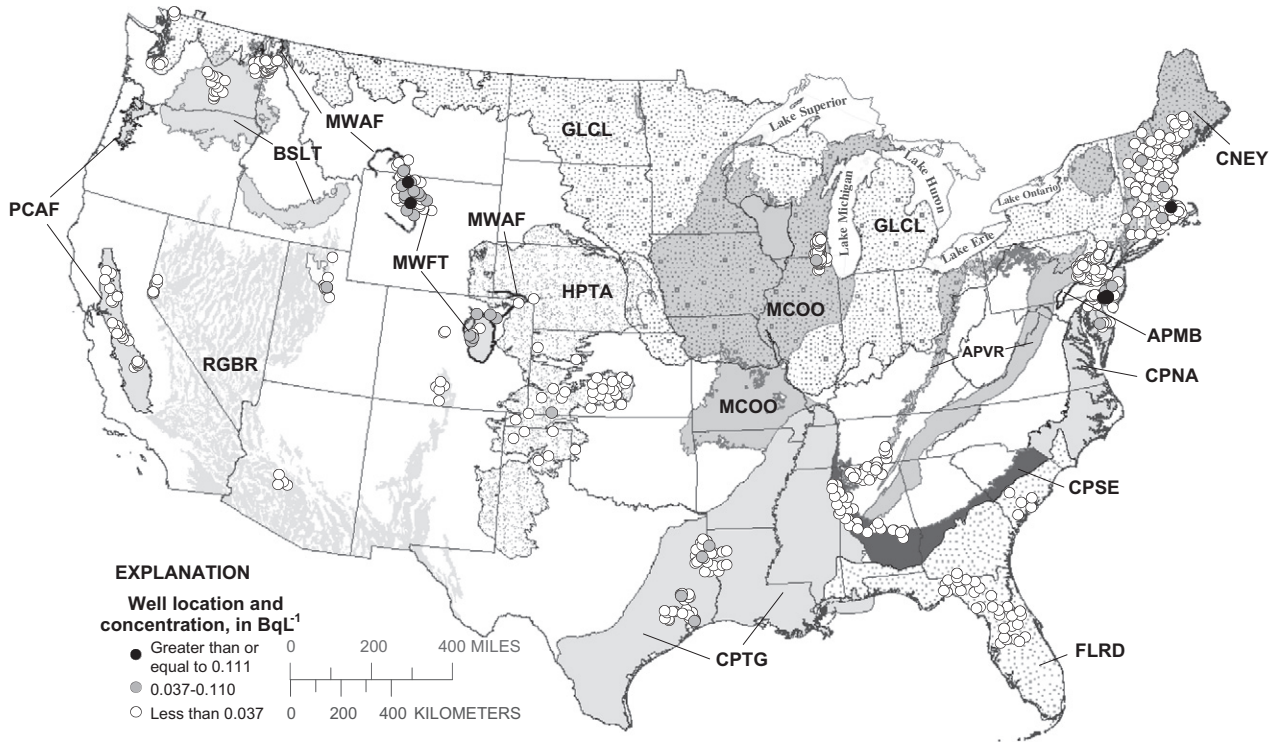


Fig. 4. Map showing concentrations of ^{224}Ra in water samples from 645 wells throughout 15 principal aquifer systems the USA, 1998–2004. [Shaded areas represent principal aquifer systems whose characteristics are detailed in Table 1.]

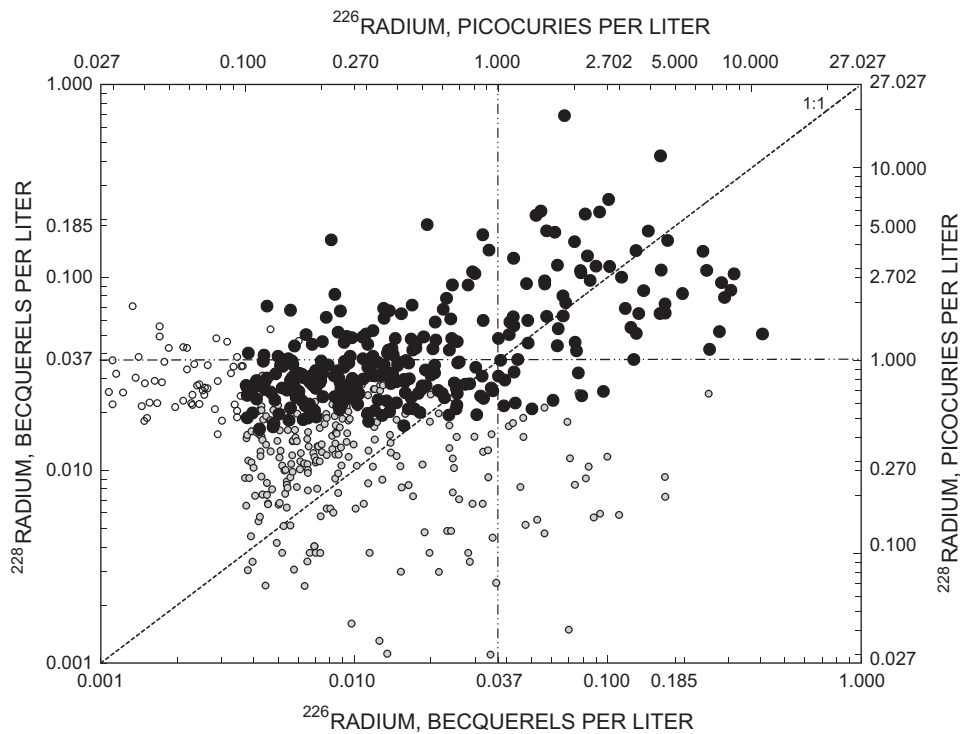


Fig. 5. Relationships between concentrations of ^{228}Ra and ^{226}Ra in water samples from 15 principal aquifer systems of the USA, 1998–2005. [Solid symbol, concentration for both isotopes greater than or equal to the sample specific minimum detectable concentration (SSMDC) data-quality performance indicator; gray symbol, concentration for the ^{226}Ra isotope greater than or equal to SSMDC; open symbol, concentration for the ^{228}Ra isotope greater than or equal to SSMDC. Dashed diagonal line is the 1:1 line. A vertical and horizontal dashed line indicates the concentration of 0.037 Bq/L or 1 pCi/L.]

CPTG. Only three lithologic types had concentrations greater than the respective SSMDCs in 33% or more of the collected samples: the quartzose coastal sands, the sandstones, and the carbonate

rocks (Online Supplemental Tables S-3 and S-4). Results of previous studies have also indicated that concentrations of ^{228}Ra and ^{226}Ra typically are strongly correlated, but detection of ^{228}Ra with beta

counting techniques was commonly the limiting factor for describing the relationships (Hess et al., 1985; Szabo and Zapezca, 1991; Focazio et al., 2001; Szabo et al., 2005).

The concentrations of ^{224}Ra relative to those of ^{228}Ra are reasonably described (for samples where both were greater than the respective SSMDCs) as approximately clustered about a line whose slope is nearly 1 (0.915; Fig. 6). The intercept was nearly 0 and was statistically not significant. The correlation between concentrations of ^{228}Ra and ^{224}Ra is reasonable in that both isotopes originate from the decay series of ^{232}Th . The similarity in concentrations was notable in water samples for which concentrations were greater than 0.037 Bq/L, with a median activity ratio of 1.04. The elevated concentrations of ^{224}Ra and ^{228}Ra co-occurred in PAs composed of unconsolidated, recent (late Tertiary, Quaternary, Holocene) sand. Concentrations of ^{224}Ra were commonly high (>0.037, or even 0.074 Bq/L) and those of ^{228}Ra were commonly low (<0.037 Bq/L) (Fig. 6) in a subset of about 15% of the samples that were mostly from PAs in the western USA, from the HPTA, MWAF, MWFT, PCAF, and RGBR (Figs 3 and 4). Scatter in relative terms was greatest for corresponding concentrations of ^{224}Ra and ^{228}Ra less than 0.037 Bq/L (Fig. 6), with the large relative analytical uncertainty and limited detection performance likely obscuring trends.

3.4. Relative distribution of radium radionuclide concentrations (isotope activity ratios)

The relative abundance of the three Ra isotopes was nearly equal (nearly 1:1:1 activity ratio) in samples from a limited number of PAs, such as from the CPNA PA, and the Ra isotope data from there plot near the center of the trilinear axes shown in Fig. 7. The differences between ^{224}Ra and ^{228}Ra concentrations for most samples from the CPNA PA were relatively small, even though concentrations of both isotopes were typically greater than 0.037 Bq/L, and indicate that the isotopes of Ra are readily soluble there. A slight bias towards the concentrations of ^{224}Ra and ^{228}Ra relative

to those of ^{226}Ra were noted, indicating relatively minor enrichment of progeny from ^{232}Th relative to those of ^{238}U . On the other hand, a number of the samples from the PAs from the western USA plotted strongly in the ^{224}Ra dominated portion of the trilinear (distribution) diagram (Fig. 7). The aquifer matrix of fluvial, alluvial and basin-fill sands from many of these PAs are variegated, but are commonly arkosic (Michel and Cothorn, 1986), are derived from granitic plutons, and are U- and Th-rich (Duval and Riggall, 1999; Table 1). In some of these PAs (MWAF, PCAF, RGBR), the concentrations of U and ^{222}Rn in the water are typically among the highest in the USA (Tables 1 and 3). Yet, among the Ra isotopes, it is only the concentrations of ^{224}Ra that were occasionally elevated in the water from these PAs (Figs. 3, 4 and 7; Table 3).

The process that explains the detection of ^{224}Ra at concentrations greater than those of ^{228}Ra in water in Th-rich (^{228}Ra -bearing) fluvial, alluvial and basin-fill sands in the western USA is recoil enrichment of ^{224}Ra relative to ^{228}Ra . The $^{224}\text{Ra}/^{228}\text{Ra}$ ratios exceed unity when the possible mechanism is combined alpha recoil of the short-lived ^{224}Ra and limited Ra solubility (mobility) controlled by adsorption onto Fe- and Mn-oxides and/or clay minerals. Alpha recoil from minerals in the aquifer matrix alone where radioactive equilibrium is established would generate a $^{224}\text{Ra}/^{228}\text{Ra}$ ratio in the groundwater that approximately mimics that of aquifer solids, which is one or very near one. The rapid and equal adsorption of the two Ra isotopes (controlled by aquifer geochemistry) combined with preferential faster recoil of ^{224}Ra generate the $^{224}\text{Ra}/^{228}\text{Ra}$ ratio >1. The mineral grains have a coating of oxides that contains an accumulation of insoluble and adsorbed isotopes of Th as the process of weathering proceeds (Tricca et al., 2001; Reynolds et al., 2003), and the direct recoil into adjacent pore space of the ^{224}Ra from the short-lived ^{228}Th parent (1.9-a half life) rich in the grain-coating oxides leads to enrichment of the ^{224}Ra in solution. Recoil damage to crystal lattice structure within the mineral grains (Fleischer, 1980) may also lead to further preferential release (desorption and diffusion from the grain interior, or indirect recoil)

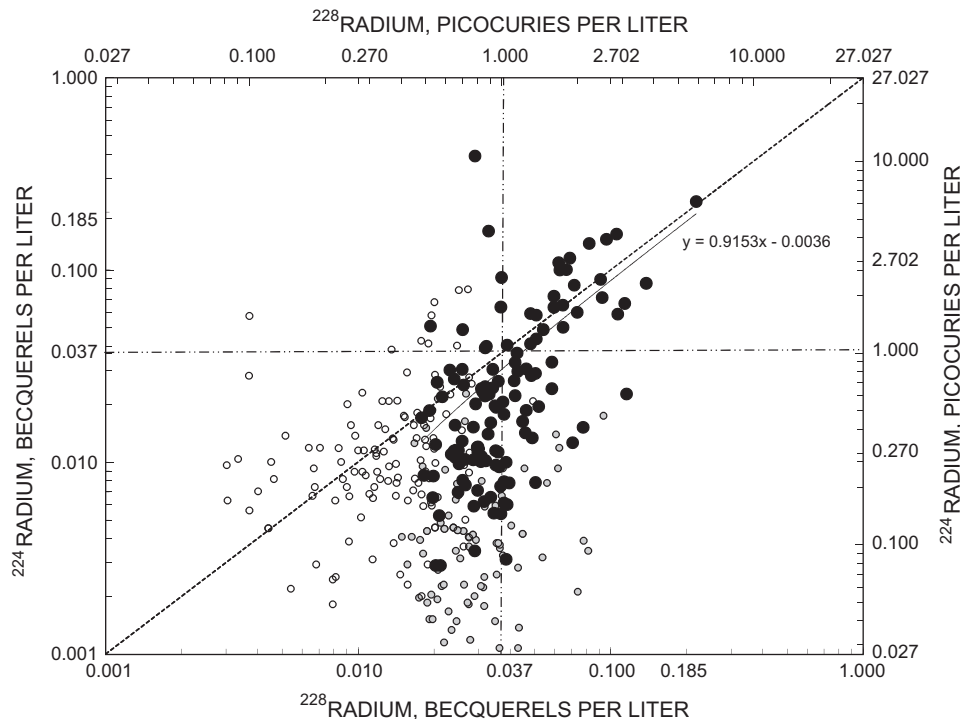


Fig. 6. Relationships between concentrations of ^{224}Ra and ^{228}Ra in water samples from 15 principal aquifer systems of the USA, 1998–2004. [Solid symbol, concentration for both isotopes greater than or equal to the sample specific minimum detectable concentration (SSMDC) data-quality performance indicator; gray symbol, concentration for the ^{228}Ra isotope greater than or equal to SSMDC; open symbol, concentration for the ^{224}Ra isotope greater than or equal to SSMDC. Dashed diagonal line is the 1:1 line. The best fit line (solid) shown had a slope of 0.915 for the ^{224}Ra and ^{228}Ra isotope pair. A vertical and horizontal dashed line indicates the concentration of 0.037 Bq/L or 1 pCi/L.]

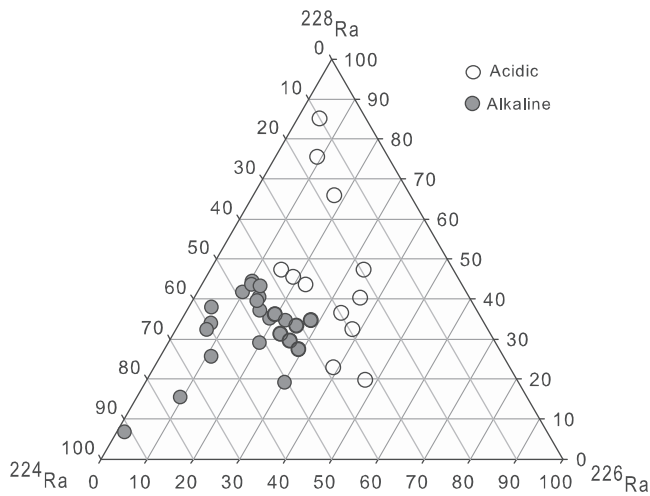


Fig. 7. Ternary diagram showing relative concentrations of Ra isotopes (^{224}Ra , ^{226}Ra , and ^{228}Ra) in samples in which all 3 were present at detected concentrations in the acidic quartzose Coastal Plain, North Atlantic principal aquifer system (open circles) and the alkaline basin-fill and alluvial sands of the High Plains Tertiary alluvium, Mountain West alluvium and fill, Pacific Coastal alluvium and fill, and Mountain West Foreland Basins Tertiary sandstone principal aquifer systems (solid circles), 1998–2004. [Principal aquifer descriptions are provided in Table 1 and locations are shown in Fig. 1.]

of the progeny forming in latter parts of the decay series, such as the ^{224}Ra isotope that is many decays removed from the original ^{232}Th parent. Any change in aquifer geochemistry affecting Ra mobility, whether along a flowpath or temporal, can further enhance high values of the ratio because ^{224}Ra will reach steady state concentrations faster than longer-lived ^{228}Ra (Sturchio et al., 1993). Where Ra solubility is low, the excess contribution of ^{224}Ra released to solution by the (physical) recoil mechanism relative to the overall amount of ^{228}Ra released by leaching could be substantial. The excess contribution of ^{234}U released to solution relative to the parent isotope, ^{238}U , by the (physical) recoil mechanism can be substantial where U is of low solubility (Osmond and Cowart, 1976; Gilkeson and Cowart, 1987), but the processes are not identical because U isotopes have longer half lives than do the isotope pair of ^{224}Ra and ^{228}Ra , and the U isotope ratios may vary in source rock and soil.

Where Ra is reasonably soluble, on the other hand, the excess contribution of ^{224}Ra mobilized to solution by the physical recoil process relative to dissolution (leaching by chemical weathering) of ^{228}Ra is relatively small. Isotopic ratios for the $^{224}\text{Ra}/^{228}\text{Ra}$ near 1 are expected when large values of both (usually >0.037 Bq/L) are present and represent a condition where Ra isotopes are somewhat soluble (adsorptive distribution coefficient is relatively small). Relatively large concentrations of both isotopes (often near 0.185 Bq/L) are noted in the waters from the CPNA PA (Fig. 3). The waters in the CPNA are noted to be among the most acidic among all the PAs (median and minimum pH, 5.6 and 4.0, respectively) and thereby are in strong contrast with the alkaline chemistry of the PAs from the western USA (median pH range is from 7.2 to 7.9 for water samples from the HPTA, MWAF, MWFT, PCAF, and RGBR PAs, with a maximum of 9.3; Table 1). The solubility of Ra in waters and the isotopic ratios (especially for $^{224}\text{Ra}/^{228}\text{Ra}$) are thus partly related to the varying geochemical conditions.

The $^{228}\text{Ra}/^{226}\text{Ra}$ activity ratios for the water samples can be affected by the ratio of concentrations of the long-lived parents, Th and U, respectively, in the aquifer matrix. The water from unconsolidated to semi-consolidated sands all typically had ^{228}Ra present in higher concentrations than ^{226}Ra , whether they were quartzose coastal sands (CPNA PA), or whether they were arkosic or lithic-fragment-rich fluvial, alluvial and valley-fill sands (RGBR,

PCAF, HPTA, and WMAF PAs). The median $^{228}\text{Ra}/^{226}\text{Ra}$ activity ratios for the water samples from the CPNA PA of 1.32 was the lowest median ratio among these PAs with sand matrix; among the remaining 4 PAs, the median $^{228}\text{Ra}/^{226}\text{Ra}$ activity ratios were 2.85, 3.51, 3.91 and 4.97, respectively (Online Supplemental Table S-4). For 3 of these PAs (PCAF, WMAF and RGBR), in all the samples where concentrations of both Ra isotopes were greater than the SSMDCs, ^{228}Ra concentrations were greater than corresponding concentrations of ^{226}Ra .

Enrichment of ^{226}Ra relative to ^{228}Ra (note it is the $^{226}\text{Ra}/^{228}\text{Ra}$ greater than 1.0 in this case) was noted in waters especially from the carbonate-rock-type aquifer systems, and is a plausible product of the enrichment of U (relative to Th) in carbonate minerals (Sturchio et al., 2001). For the water samples from the MCOO PA, the median ratio of $^{226}\text{Ra}/^{228}\text{Ra}$ was 1.84, the maximum ratio was 5.98, and the ratio of $^{226}\text{Ra}/^{228}\text{Ra}$ in more than 75% of the water samples was greater than 1. Similarly, the ratio of $^{226}\text{Ra}/^{228}\text{Ra}$ in 89% of the water samples collected by Sturchio et al. (2001) from Midcontinent carbonate aquifers was greater than 1.5. The median $^{226}\text{Ra}/^{228}\text{Ra}$ ratio was about 1.0 for water samples in this study from the phosphatic limestones of the FLRD, but large $^{226}\text{Ra}/^{228}\text{Ra}$ ratios were measured (maximum, 3.76). The high solubility of ^{238}U (Langmuir, 1978) relative to ^{232}Th (insoluble; Langmuir and Herman, 1980) is the cause for the widespread distribution, redistribution and enrichment of U relative to background levels in marine carbonate deposits and siliclastic sediment deposits that undergo diagenetic reactions to form sandstone. Uranium can form complexes with organic-matter residues and become enriched relative to background in organic C-rich sands, sandstones, and shales (Swanson, 1962; Turner-Peterson, 1985). The lithified sandstones composing the APMB PA fit this description, for example (Turner-Peterson, 1980), as do perhaps some unconsolidated, semi-consolidated, and consolidated closed basin sediment deposits from the RGBR PA (Turner-Peterson, 1985; Thomas et al., 1993). The concentration of ^{226}Ra was on occasions enriched relative to that of ^{228}Ra in a subset of samples of water from the APMB PA, with maximum $^{226}\text{Ra}/^{228}\text{Ra}$ activity ratio of 3.0. Locally variable U enrichment relative to Th is likely.

The $^{228}\text{Ra}/^{226}\text{Ra}$ isotope activity ratio data for ground water of the USA show ratios that typically are enriched in ^{228}Ra relative to ^{226}Ra in the clastic sand aquifers, and the ratios were comparable to the activity ratio data for these Ra isotopes compiled worldwide from sand and sandstone aquifers by Vengosh et al. (2009); they obtained a median $^{228}\text{Ra}/^{226}\text{Ra}$ isotope activity ratio of 1.6, with ratios from individual samples exceeding 5, and median ratios from a major sandstone aquifer studied of about 2.9. The $^{228}\text{Ra}/^{226}\text{Ra}$ isotope activity ratio results from the sand aquifer systems in this study were also consistent with slight enrichment of ^{228}Ra relative to ^{226}Ra from major estuaries and rivers that drain major parts of the North American continent, including the Atchafalaya, Delaware, Mississippi and Pee Dee Rivers (Elsinger et al., 1982; Elsinger and Moore, 1983; Krest et al., 1999). The exception is the lower Mississippi River (Kraemer and Curwick, 1991) perhaps because of industrial input from phosphatic limestone. The $^{228}\text{Ra}/^{226}\text{Ra}$ isotope activity ratios in streams traversing the Indian subcontinent (Sarin et al., 1990) indicate a pattern similar to that for ground and stream waters of the USA, with dominance of ^{228}Ra relative to ^{226}Ra in sand and sandstone terranes, and conversely, dominance of ^{226}Ra relative to ^{228}Ra in carbonate-rock terranes.

3.5. Relationships among radium, uranium, and gross alpha-particle activity

The gross alpha-particle activities measured by the conventional technique (no specified holding time) corresponded and correlated more strongly with the concentration of U than with that of

^{226}Ra (Table 4; Online Supplemental Tables S-6 and S-7). This result is explained by the widespread occurrence of oxic and neutral to alkaline ground water used for drinking water in the USA (Table 1) in which U is strongly soluble (Hodge et al., 1998; DeSimone, 2009; Jurgens et al., 2009). The U frequently occurs at concentrations that contribute considerable gross alpha-particle activity to the water. There is correspondence between gross alpha-particle activity and high concentrations of ^{226}Ra , but only in a smaller subset of samples than is the case for U (Table 4). The conventional compliance monitoring for gross alpha-particle activity as an indicator for where combined Ra exceeds the MCL as suggested by Hess et al. (1985) may be an inadequate screening test for Ra occurrence except perhaps for the few PAs where U is absent from the water. An adequate application of such a screening scenario might best fit the CPNA PA, where Ra radionuclide concentrations are among the highest and U concentrations are among the lowest among the PAs (Table 3).

The common presence of ^{224}Ra in moderate to high concentrations in waters from the coastal sand aquifer systems of the eastern USA and the occasional presence of ^{224}Ra in high concentrations in waters from the western USA was documented in this study (Fig. 4), with the maximum ^{224}Ra concentration of 0.392 Bq/L (10.6 pCi/L) determined from alluvium in the MWAFA PA (Fig. 3). This particular ^{224}Ra -rich sample did not have a corresponding measurement of gross alpha-particle activity within 72 h after sample collection, however, and the effect of the ^{224}Ra could thus not be determined. The effect of ^{224}Ra concentration on gross alpha-particle activity within 72 h and 30 days after sample collection was considered for 134 samples from the western USA; gross alpha-particle activities declined by a difference that exceeded the precision estimate (pe) in 9 (6.7%) of the samples, with the magnitude of the difference in each greater than 0.074 Bq/L (2.0 pCi/L). All nine of those samples had detectable concentrations of ^{224}Ra , most with concentrations from 0.037 to 0.074 Bq/L, with a maximum of 0.109 Bq/L (2.95 pCi/L). The high initial gross alpha-particle activity within 72 h of sample collection and decline with time resulting from the decay of ^{224}Ra could be observed even in the samples in which U isotopes were predominant (with concentrations exceeding 10 $\mu\text{g/L}$). The moderate to low frequency for substantial gross alpha-particle activity decline observed in ground waters from the western USA in this study was consistent with the moderate to low frequency of elevated ^{224}Ra concentrations observed. Ruberu et al. (2005) in a survey of ground water from California similarly observed only the occasional presence of ^{224}Ra in moderate to high concentrations. The occasional ^{224}Ra occurrence

can affect gross alpha-particle activity in the western USA, however.

4. Discussion

4.1. Importance of geochemistry for occurrence of the higher concentrations of radium in the principal aquifer systems

Concentrations of Ra were found to significantly relate to select geochemical environments and the major overall geochemical characteristics of the ground waters, such as pH, DO and total dissolved solids. The geochemical characteristics varied widely among the PAs, and the variables pH, DO, and total dissolved solids (represented here by the frequently measured surrogate, specific conductance, SC) were broadly representative of the major aspects of ground-water geochemistry (acidity, oxidation–reduction potential, and the amount of mineralization, respectively) by which the geochemical environments (providing controls) of Ra occurrence can be broadly classified. (See Table 1 and Online Supplemental Information for details.) The critical relationships between Ra occurrence and geochemical characteristics of the waters can be understood in the context that the PAs where Ra concentrations in water were highest had among the lowest U and Th contents in the aquifer solids (Table 1), and the conventional measurements of the general amount of radioactivity in the water, such as measurements of gross alpha-particle activity, or the concentrations of ^{222}Rn or U, provided no reliable means for identifying where combined Ra concentrations were routinely elevated (Tables 3 and 4).

4.2. Relationships between concentrations of radium, dissolved oxygen and pH

Concentrations of combined Ra were statistically significantly different among broad groups when waters were classified on the basis of the pH and the DO content, with the highest concentrations among the near neutral to alkaline and anoxic ($\text{pH} > 6$, $\text{DO} < 1 \text{ mg/L}$), acidic and oxidizing ($\text{pH} < 6$, $\text{DO} > 1 \text{ mg/L}$), and acidic and anoxic ($\text{pH} < 6$, $\text{DO} < 1 \text{ mg/L}$) water-chemistry groups (Table 3). The frequency of occurrence of combined Ra in concentrations greater than the MCL was highest (9.7%) among the acidic oxidizing water samples, and concentrations greater than the MCL and 0.037 Bq/L were found to be most common within these three water-chemistry groups. Of the 40 samples in which the com-

Table 4

Number of detections within ranges of gross alpha-particle activities with U and ^{226}Ra concentrations for 757 water samples from 15 principal aquifer systems in the USA, 1998–2004. *Italics* indicate low constituent concentrations that cannot account for the gross alpha-particle activity [1 Bq/L = 27.027 pCi/L; MCL, maximum contaminant level; ND, non detect].

Uranium concentration in $\mu\text{g/L}$		Gross Alpha activities in Bq/L [pCi/L]		
		<0.370 [<10]	0.370–0.555 [10–15]	≥ 0.555 (MCL) [≥ 15 (MCL)]
≥ 30 (MCL)		9	1	17
20–29.99		6	7	7
10–19.99		20	5	6
<10, but detected		411	7	14
ND–<10		218	3	5
Totals		664	23	49
$^{226}\text{Radium}$ concentration in				
Bq/L	pCi/L			
≥ 0.185 (MCL)	≥ 5 (MCL)	–	–	4
0.111–0.185	3–4.99	2	–	1
0.037–0.111	1.0–2.99	30	3	7
0.004–0.037	0.11–0.99	312	18	24
ND–<.004	ND–<.11	334	5	17
Totals		678	26	53

bined-Ra concentration (or in one case, ^{226}Ra concentration alone) exceeded the MCL, waters with either low DO concentration and near-neutral to alkaline conditions (25 of 40, or 62.5%), with low pH and oxic conditions (12 of 40, or 30.0%), or low DO concentration in combination with low pH (2 of 40, or 5.0%) accounted for 39 samples (97.5%) (Online Supplemental Fig. S-2). The one remaining sample with combined Ra concentration greater than the MCL was characterized by “mixed” redox conditions indicating anoxic water was entering the well bore at some productive interval. In similar fashion, concentrations of combined Ra were highly likely to exceed 0.037 Bq/L in waters with low DO concentration (26.6%), low pH (37.2%), or low DO concentration in combination with low pH (50.0%). The near-neutral, neutral and alkaline waters, when oxic, had a low frequency of occurrence of concentrations of combined Ra > 0.037 Bq/L of 14.3% and the MCL of 0.3% (Table 3). The three water-chemistry groups defined by low pH, low DO concentration, or by the combination of the two were found to occur with moderate to high frequency in all of the PAs where the elevated Ra concentrations were present.

The effect of enhanced mobility of Ra in the anoxic type waters is among the most important factors explaining the occurrence of elevated concentrations of Ra in the USA because of the frequent occurrence of anoxic and near-neutral to alkaline type ground water in broad regions of the northeastern, southeastern, and central USA. Of the 15 PAs studied, 6 PAs (CNEY, CPTG, FLRD, GLCL, MCOO, and the MWTF) had the common occurrence of anoxic water, with median DO < 1.1 mg/L for each (Table 1). All the PAs with low DO concentrations were classified by the Tukey–Kramer test as belonging to one of the two higher Ra-concentration groups among the PAs (Table 3). The frequency of occurrence of concentrations of combined Ra > 0.037 Bq/L among samples of water with DO concentration < 1 mg/L from these 6 PAs about equals or mostly exceeds the overall frequency of occurrence in oxic near-neutral, neutral and alkaline waters of 14.3% and the overall national frequency of occurrence of 26.8% except for 1 PA (GLCL) (Online Supplemental Tables S-3). Water samples from the APMB PA were less frequently anoxic than from those other 6 PAs, but combined Ra concentration > the MCL and ≥ 0.037 Bq/L were associated with anoxic samples. The frequency of occurrence of concentrations of combined Ra > 0.037 Bq/L (or in a few cases, of the one measured isotope of Ra with concentration > 0.037 Bq/L) among samples of water with DO concentration < 1 mg/L from these 7 PAs are as follows: the MCOO, 37 of 47 samples (78.7%), APMB, 4 of 6 samples (66.7%), FLRD, 26 of 64 samples (40.6%), CPTG, 17 of 51 samples (33.3%), MWTF, 7 of 24 samples (29.2%), CNEY, 12 of 47 samples (25.5%), and GLCL, 28 of 201 samples (13.9%); but with slightly greater frequency of occurrence in New England of 16.7%. Among the PAs such as the APVR, PCAF, and RGBR, the limited numbers of combined Ra concentrations > 0.037 Bq/L were also found with greater frequency in anoxic waters (DO concentration < 1 mg/L) than in those that were oxic.

Concentrations of combined Ra with respect to DO in a subset of 4 (MCOO, APMB, CNEY, and GLCL of the northeast) of the PAs for which at least one sample contained combined Ra at a concentration > MCL are shown in Fig. 8. The relationship of combined Ra with DO is near hyperbolic indicating that Ra concentrations are most elevated when DO is absent, and conversely Ra is low or absent when DO is abundant. (The hyperbolic relationship is equally evident when the concentrations of ^{226}Ra , the isotope that represents the large bulk of the mass of the Ra in solution, are shown as a function of DO in Online Supplemental Fig. S-3.) Statistically significant negative correlation of concentrations of combined Ra with those of DO was noted among the samples from the APMB, FLRD, and GLCL PAs (Online Supplemental Table S-5).

Concentrations of combined Ra in excess of 0.037 Bq/L and 0.185 Bq/L were found in acidic water samples (pH was less than 6.0) at a frequency of 37.2% and 9.7%, respectively, which is proportionately a greater frequency than in other water types (Table 3). The occurrences of acidic waters were not as widespread as that of anoxic waters, however, and were found especially in PAs in the northeastern, eastern and southeastern USA, especially in those consisting of unconsolidated coastal quartzose sand (Table 1). Elevated concentrations of combined Ra and all 3 individual Ra isotopes are routinely highest in waters with pH < 6 in the CPNA, CPSE, and GLCL (in New England) PAs, with the increase in combined Ra concentrations becoming most notable among the samples for which pH was below 5.5 (Fig. 9; see also Online Supplemental Fig. S-4 for the similar trend for the ^{226}Ra isotope). The frequency of occurrence of concentrations of combined Ra > 0.037 Bq/L is greatest for the samples with the lowest pH, including 22 of 24 samples (91.7%) with pH < 5.0 in the CPNA and in 5 of 6 samples (83.3%) with pH < 5.5 in the GLCL (in New England). The MCL was mostly exceeded in those cases with the most acidic waters. The maximum combined-Ra concentration 0.755 Bq/L (20.4 pCi/L) was associated with strongly acidic water (pH 4.4) in the CPNA (Fig. 9). Statistically significant negative correlation of concentrations of combined Ra with pH was noted for the entire data set and among the samples from the CPNA and CPTG PAs (Online Supplemental Table S-5). Concentrations of combined Ra, ^{228}Ra , and ^{226}Ra show a strong inverse relationship with pH in the acidic oxidizing waters (Online Supplemental Table S-6).

4.3. Relationships among ground-water chemistry, lithology, and radium occurrence

Concentrations of combined Ra were substantially loaded to each of the first three principal components (PCs) for the entire data set defined by principal components analysis (PCA), the range of the absolute values of the loading (r) of combined Ra was 0.128–0.226. These three PCs given in Table 5 represented readily recognizable major components of ground-water geochemistry that related to mineralization (component 1, PC1), oxidation–reduction and DO (component 2, PC2), and acidity (component 3, PC3), respectively. (Listed in Table 5 for the overall data set and also for each PA are the component numbers for which Ra loading was noted, the fraction of variance they explain, and the value of the eigenvector. Loadings of additional constituents are shown as Online Supplemental Tables S-8 and S-9.) Mineralized waters were indicated by positive loadings on PC1 of the values of SC (loading, 0.356), and of the concentrations of Ca, Mg, K, Na, SO_4 and alkalinity (all loadings from 0.272 to 0.316), and to a lesser extent, those of Cl and Ra (loading, 0.128), generally indicating the effects of bedrock weathering. The constituents that loaded on PC2 had concentrations most affected by oxidation or reduction. Strong inverse loading with the concentrations of Fe, Mn and Ra (–0.467, –0.465, and –0.226, respectively) indicated the preferential occurrence of these three constituents in anoxic environments. Oxic environments were indicated by direct loading on PC2 of the concentrations of DO (0.380) and to a lesser extent NO_3 . Acidic waters were indicated by inverse loading on PC3 of the pH (–0.497) and the concentrations of alkalinity (–0.360) with direct loadings of the concentrations of Ra (0.195), Al (0.301), and NO_3 (0.282). The largest of the loading values with respect to combined Ra concentration is the corresponding (direct) relationship with Mn and Fe illustrated by PC2 indicating the strong association of combined Ra with anoxic waters (also reflected by the opposing (inverse) relationship with DO and NO_3). The component PC2 is thus listed most prominently (first) in Table 5. The next largest of these loading values with respect to combined Ra concentration is the inverse relationship with pH (PC3) and is listed second in Table 5.

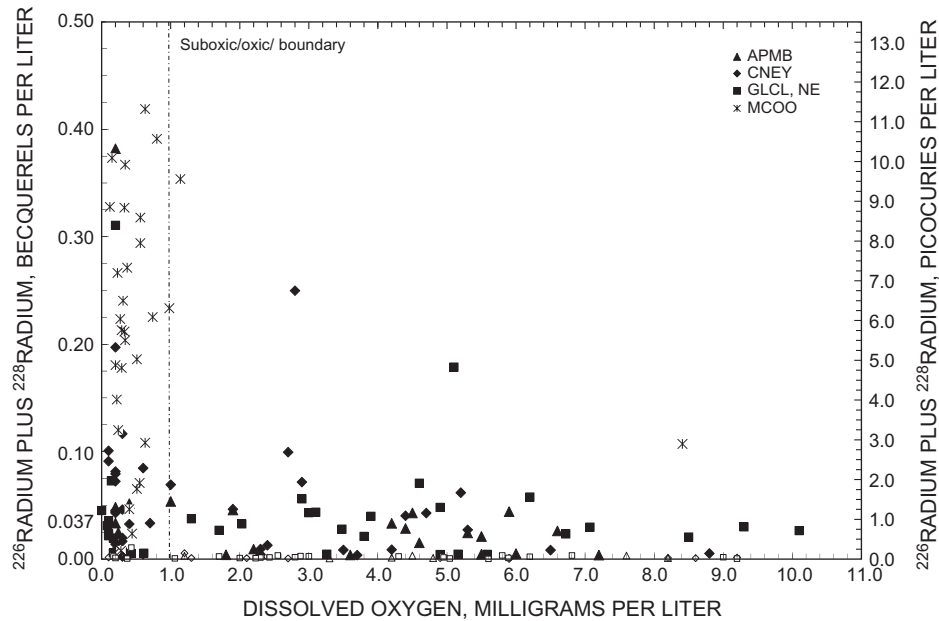


Fig. 8. Relationship of concentrations of ^{226}Ra plus ^{228}Ra and dissolved O_2 for samples from selected principal aquifer systems of the USA, 1999–2005, the Appalachian Piedmont Mesozoic Basins (APMB), the crystalline (granite, metamorphic) rocks of New England (CNEY), the glacial sand and gravel from New England (GLCL, NE), and the Mid-continent and Ozark Plateau Cambro-Ordovician dolomites (MCOO). [Solid symbol, concentration for one or both isotopes greater than or equal to the sample specific minimum detectable concentration (SSMDC) performance indicator; open symbol, concentration for both ^{226}Ra and ^{228}Ra isotopes were less than the SSMDC. All samples contained at least one Ra isotope concentration greater than the respective SSMDC for the MCOO principal aquifer. Relationship of concentrations of ^{226}Ra and dissolved O_2 for samples from the same selected principal aquifer systems, 1993–2005, is shown in [Online Supplemental Fig. S-3.](#)]

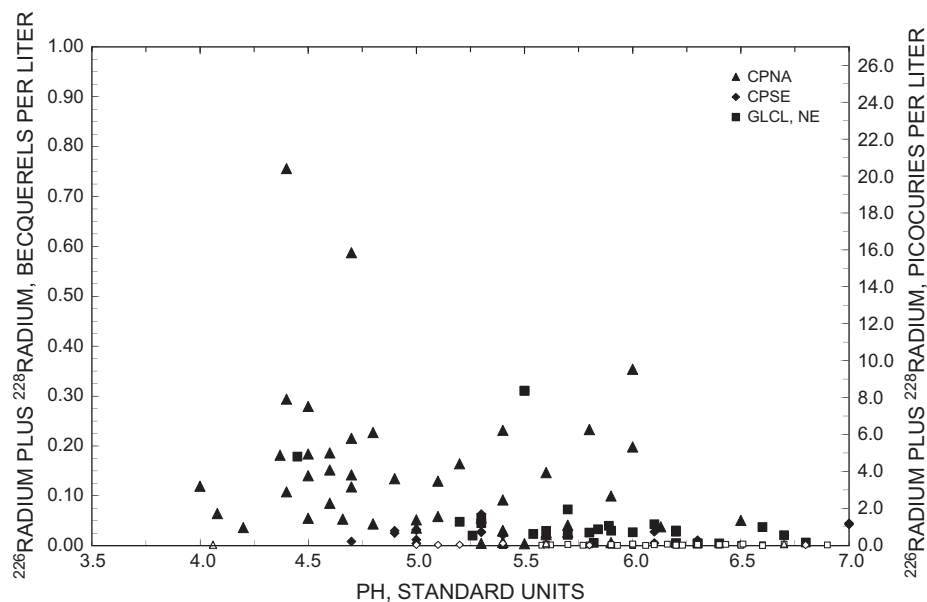


Fig. 9. Relationship of concentrations of ^{226}Ra plus ^{228}Ra with pH for samples from selected acidic principal aquifer systems of the USA, 1998–2004, the Coastal Plain, North Atlantic (CPNA), the glacial sand and gravel from New England (GLCL, NE), and the Coastal Plain, southeastern (CPSE). [Solid symbol, concentration for one or both isotopes greater than or equal to the sample specific minimum detectable concentration (SSMDC) performance indicator; open symbol, concentration for both ^{226}Ra and ^{228}Ra isotopes were less than the SSMDC. Relationship of concentrations of ^{226}Ra with pH for samples from the same selected acidic principal aquifer systems, 1998–2004, is shown in [Online Supplemental Fig. S-4.](#)]

Though not particularly strong, the positive loading for combined Ra with PC1 including with SC and with most major dissolved constituents, especially with concentrations of Ca and Mg, does provide evidence for a “competing ion” effect on Ra occurrence in mineralized waters. The SC was moderately correlated with concentrations of all the Ra isotopes (r , +0.295 for ^{226}Ra ; [Online Supplemental Table S-6](#)) but correlations were somewhat stronger

for divalent cations, Ca, Mg, Ba and Sr (range for r , +0.315–0.385 for ^{226}Ra). Among the anoxic Ra-rich waters, the SC of some were about 1000–3000 $\mu\text{S}/\text{cm}$, that is, moderately mineralized. At the moderate to low salinities of ground water used for drinking water, [Vengosh et al. \(2009\)](#) did not note a globally consistent correlation with generally increasing concentrations of Ra and increasing “mineralization”. It is in more brackish to saline water that this

Table 5

First three principal component (PC) loadings for all water samples from 15 principal aquifer systems (PAs) of the United States collected 1998–2005 for concentrations of ^{226}Ra plus ^{228}Ra (combined Ra) on the basis of 22 selected constituents. Also, PC loadings for each principal aquifer for which concentrations of combined Ra constitute a major component (loading, r , typically greater than [0.20]) and which explains greater than 5% of the variability of the water-quality. [PCN, Principal Component Number. General geochemical group for Ra occurrence from principal components on the basis of correlated constituents: Anoxic, direct with Fe and Mn and indirect with dissolved O_2 (DO) and NO_3 (light shading), Acidic, direct with Al and NO_3 and indirect with pH, alkalinity, and silica (dark shading); Mineralized, direct with specific conductance (SC), Ca, alkalinity, SO_4 , K and other major constituents. **Bold**, loadings of combined Ra and loadings greater than [0.20]; *italic*, loadings less than [0.10]. Loadings for As, U and Se rarely were substantial for those components for which Ra demonstrated substantial loading and loadings for Co were nearly identical to those of Ni; loadings for a larger subset of these constituents are shown in the [Online Supplemental Information](#). PAs in **bold** type are those with at least one combined-Ra concentration greater than or equal to the Maximum Contaminant Level (0.185 becquerels per liter, or 5 picocuries per liter). Excluded from PC analysis were gross measures of radioactivity (gross alpha and beta-particle activity and ^{222}Rn concentration) and the majority of trace elements. Light shading, constituents associated with anoxic conditions; darker shading, constituents associated with acidic conditions.]

General geochemical group for Ra occurrence for Principal Aquifer Systems (from principal components for each aquifer system) ¹																
Constituent	Entire Data Set			Carbonate rocks		Mixed ³	Anoxic and Mineralized					Acidic and Anoxic		Acidic		
	ALL	ALL	ALL	FLRD	MCOO	APVR	APMB	MWFT ⁶	MWFT ⁶	CNEY	HPTA	GLCL	CPTG	CPSE	CPSE	CPNA
$^{226}\text{Ra} + ^{228}\text{Ra}$	-0.226	0.195	0.128	0.222	0.175	0.159	0.218	0.296	0.279	0.258	0.159	0.161	0.164	0.343	-0.208	0.268
DO	0.380	0.205	-0.144	-0.052	-0.108	-0.262	-0.319	0.125	-0.231	-0.210	-0.191	-0.242	-0.180	-0.056	0.360	0.278
Iron	-0.467	<i>-0.054</i>	0.106	0.150	0.231	0.175	0.287	<i>0.055</i>	<i>-0.029</i>	0.175	0.177	0.209	<i>0.086</i>	0.177	<i>0.028</i>	-0.195
Manganese	-0.465	<i>0.070</i>	0.100	0.274	0.218	<i>0.097</i>	0.258	0.192	0.214	0.156	0.237	0.196	0.166	<i>0.097</i>	0.209	<i>-0.019</i>
Nitrate	0.432	0.282	<i>0.018</i>	<i>0.049</i>	<i>-0.081</i>	<i>-0.052</i>	-0.295	0.237	<i>-0.192</i>	<i>0.012</i>	-0.109	<i>-0.096</i>	<i>-0.084</i>	<i>-0.052</i>	0.369	0.353
pH	<i>0.066</i>	-0.497	0.119	-0.283	-0.150	0.295	0.192	-0.328	<i>0.055</i>	<i>0.069</i>	<i>-0.072</i>	<i>0.014</i>	0.247	-0.261	-0.252	-0.207
Alkalinity	<i>0.051</i>	-0.360	0.285	0.132	<i>0.059</i>	0.293	0.336	<i>-0.085</i>	<i>-0.070</i>	0.139	0.217	0.291	0.369	<i>-0.134</i>	<i>-0.122</i>	<i>-0.147</i>
SC	<i>0.016</i>	<i>-0.085</i>	0.356	<i>0.059</i>	0.308	0.350	0.309	0.154	<i>-0.033</i>	0.402	0.142	0.384	0.411	-0.196	<i>0.025</i>	0.116
Calcium	<i>0.080</i>	<i>-0.061</i>	0.316	0.385	0.284	0.314	0.273	0.338	<i>-0.089</i>	0.291	0.232	0.324	0.267	<i>-0.056</i>	0.254	0.133
Magnesium	<i>0.093</i>	<i>-0.029</i>	0.314	0.100	0.284	0.297	0.265	0.320	-0.188	0.298	0.264	0.344	0.266	<i>0.063</i>	0.374	0.160
Sulfate	<i>0.055</i>	<i>0.046</i>	0.301	0.232	0.308	0.257	0.191	0.188	<i>-0.094</i>	0.163	0.291	0.234	0.109	0.171	<i>0.044</i>	0.283
Barium	<i>-0.034</i>	<i>0.058</i>	0.171	0.110	-0.252	0.223	-0.160	<i>0.018</i>	0.331	0.272	-0.151	0.315	0.251	0.163	0.367	0.245
Fraction of variance ⁷	0.136	0.114	0.270	0.239	0.425	0.299	0.259	0.333	0.082	0.208	0.369	0.259	0.218	0.137	0.071	0.204
PCN	2	3	1	1	1	1	1	1	4	1	1	1	2	2	4	2
Eigen vector	2.991	2.509	5.937	5.252	9.357	6.578	5.704	7.327	1.802	4.584	8.121	5.704	4.801	2.606	1.342	4.494

^a Low Ra occurrence and no readily interpretable geochemical relations on the basis of PCA for MWAF, PCAF, RGBR, and BSLT PAs.

^b PCs shown in order of significance with respect to Ra occurrence, not significance with respect to explaining variance for the entire data set.

^c Intermixed Sandstones and Carbonate Rocks.

^d Crystalline (Felsic to Intermediate) Igneous and Metamorphic Rock.

^e Alluvial, or Fluvial sands and gravels.

^f Strong loading for combined Ra with PC1 for MWFT PA but the combination of loadings does not readily fit as representative of anoxic, acidic, or mineralized type waters.

^g Fraction of variance explained by the particular PC.

correlation holds more consistently (Kraemer and Reid, 1984; Sturchio et al., 2001).

The most statistically significant component to which the concentrations of combined Ra loaded significantly (typical values of r , $\geq[0.20-0.40]$) for each PA is given in Table 5 and illustrates the commonality of relationships among ground-water chemistry, and Ra occurrence among the various PAs. The most common factors relating to Ra occurrence individually or in combination, as indicated by the PC that explains the most variance and that also has substantial loading for Ra, are PCs comprised of groupings of constituents relating to the occurrence of anoxic (low DO) waters, with high loadings for the concentrations of Fe and Mn, and with groupings of constituents associated with a moderate degree of mineralization. These relationships cross-cut nearly all lithological types in the PAs. The constituents whose strong loadings related to anoxic waters are displayed at the top in Table 5 and are shaded in light gray. The loading of Ra and constituents commonly associated with anoxic waters onto a single PC was a prominent descriptor of the (variance of the) geochemistry of most of the PAs (as many as 10 of the 15 studied). Concentrations of combined Ra loaded strongly with constituents describing acidic conditions for 2 PAs (quartzose coastal sand aquifer systems). The constituents that represent association with acidic waters are shaded in dark gray in the middle rows of Table 5. The loading for Ca, Mg and Ba, and the corresponding loading of combined Ra was common for most of the PAs; this set of relationships for the PCs is most consistent with the presumed effect of competing ions on increased Ra occurrence.

Concentrations of combined Ra showed loadings directly with those of Fe and Mn, Ca, and SC, and indirectly with DO for the primary component for the APMB, GLCL, CNEY, MCOO, HPTA and APVR PAs. The Ra concentration was loaded onto principal components in the CPTG and MWFT PAs that also included constituents that related to anoxic and mineralized waters, but the components (second and fourth, respectively) were not primary. Radium concentration was directly loaded with concentrations of Fe and Mn in the FLRD PA (Table 5), indicative of Ra occurrence with the “anoxic fraction” of the water. Some to many samples in the CPTG, FLRD and MWFT PAs had the concurrent presence of DO, Mn, and/or Fe – mixed redox indicators, reflective of borehole mixing of water of different types (McMahon and Chapelle, 2008). All but 1 of the 13 highest combined-Ra concentrations (>0.074 Bq/L) in the FLRD PA and all but 5 of the 13 highest concentrations in the CPTG PA were associated with waters with concentration of DO < 1 mg/L, though Ra was also detected in waters of mixed redox category. The mixing of dilute oxic and anoxic/suboxic waters in individual boreholes is common in production wells with high yields in the FLRD PA (Katz et al., 2007). The loading with (and corresponding correlations with) concentrations of Ca and the SC indicate that the competing ion factor likely also has an effect on Ra occurrence in the CPTG and the MWFT PAs.

The association of acidic water type with Ra occurrence was predominant in the eastern coastal USA in the CPNA and CPSE PAs. The components describing the association were not the predominant component in either PA, but were of importance (explained the second greatest amount of variance for each PA). Acidic waters with elevated Ra concentrations were also found in the GLCL PA in New England, though anoxic waters were more common in this PA overall, and the occurrence of Ra was also associated with constituents found in anoxic and acidic waters there. The acidic water associated with elevated Ra occurrence was commonly NO_3 dominated, especially in the CPNA PA (Table 5), and to a lesser extent in the GLCL PA in New England. Septic-tank effluents and agricultural soil amendments are important NO_3 sources there (Szabo et al., 1997; Starns and Brown, 2007), and the nitrification of the septic-tank effluents and soil amendments

has been shown to decrease pH in quartzose sands (Robertson et al., 1998; Szabo et al., 2010). In the NO_3 -dominated waters, primarily from the areas of quartzose sediment, concentrations of all isotopes of Ra correlated strongly and inversely with concentrations of carbonate alkalinity, Ca and silica, and with pH (Online Supplemental Table S-7).

It is not coincident that geochemical environment, more so than general lithology or bedrock radioactivity, best describes the occurrence of Ra, that is, most frequent in anoxic or acidic waters in PAs in the USA. Environmental conditions must be such that the tendency of Ra toward adsorption, especially onto Fe- and Mn-oxides and oxyhydroxides, is overcome. In anoxic geochemical environment where DO is consumed and the waters are Fe- and Mn-reducing, the Fe- and Mn-oxyhydroxide coatings are thermodynamically unstable and are absent, or have little abundance; or, if some are present, they, along with clay minerals, are coated with reduced divalent Fe and Mn cations that are strongly adsorbed (Roden and Zachara, 1996; Silvester et al., 2005). The few remaining adsorption sites quickly become saturated and the sorption of other divalent cations is prevented. The sorptive properties of the aquifer material may be less than what might be possible in an oxic environment where Fe- and Mn-oxyhydroxides are abundant (reductive degradation of sorption capacity). The competing ions likely also have a notable effect on Ra occurrence especially in anoxic environments if the sorptive capacity is somewhat diminished. The additional major factor limiting Ra adsorption in the PAs is the pH of the ground water; the variable surface charge of the aquifer matrix is controlled mostly by a mixture of Fe, Mn and Al oxyhydroxides (point of zero charges about pH 7, 6 and 5, respectively; Stumm and Morgan, 1981), and as the pH approaches these values, Ra is less likely to be adsorbed. The H^+ cation itself, present at relatively high concentrations in acidic waters, competes effectively with divalent cations for sorption sites, including with Ca and Mg (Appelo, 1994), and by analogy, with Ra. Concentrations of Mn correlated with those of all three Ra isotopes and those of Fe with two, ^{224}Ra and ^{226}Ra , respectively, in acidic and oxic waters (range of r , $+0.196-0.337$; Online Supplemental Table S-6), Ra mobility likely corresponds with the instability of the surfaces of the oxides.

4.4. Compositional variability and affects on radium concentration for the more mineralized waters

Compositional variability among the aquifer materials and of recharge, and the variability in water residence time has substantial effects on the actual water composition, pH, and the amount of DO consumed, and thus the amount of Mn, Fe or Ra liberated to solution. The radionuclides of U, Th and Ra, and similarly, the chemical constituents, Fe, Mn, S and organic C may differ in their distribution in the solid matrix, thereby strongly affecting patterns of weathering, the initiation of redox reactions such as Mn, Fe and SO_4 reduction, and the formation and distribution of secondary minerals critical to Ra sorption and also recoil. Water from a limestone aquifer may have lower concentrations of Fe or Mn than water from a glacial sand and gravel aquifer under similar Fe-reducing conditions. Concentrations of Fe in samples from the GLCL PA were as high as 29.9 mg/L. Concentrations of Ra were generally higher in waters from the limestone aquifer systems than in the glacial aquifers (Table 3) indicating that perhaps a greater proportion of the total adsorption sites are unavailable (removed, or not formed initially, or saturated) for the limestone aquifers with ongoing Fe and Mn reduction and dissolution than for the glacial aquifers.

Interplay of a variety of geochemical mechanisms may affect the Ra concentrations as water composition evolves and TDS increases. Bicarbonate was most commonly the predominant anion

among the sampled waters, but among those that were more mineralized, high concentrations of SO_4 and Ca were present as well, and the SO_4 -dominated water type was commonly encountered (sampled). Many samples of SO_4 -dominated waters did not have detectable concentrations of Ra isotopes. The SO_4 -dominated water type, however, also had combined-Ra concentrations greater than the MCL with high frequency of occurrence – 12.76% (12 of 94 samples) – significantly higher than from HCO_3 -dominated water types (Table 3). The overall concentration trend for the SO_4 -dominated water type showed that ^{226}Ra , Ba and SO_4 concentrations were inversely correlated (Online Supplemental Table S-7).

The geochemistry and geology of the Ra-poor and Ra-rich samples from the SO_4 -dominated waters are examined in turn. The waters containing the elevated concentrations of Ra and dominated by SO_4 were primarily anoxic as indicated by the low concentrations of DO and by high concentrations of Fe (Fig. 10). Concentrations of Ra isotopes, especially those of ^{226}Ra , correlated strongly with concentrations of Fe in SO_4 -dominated and in HCO_3 -dominated waters (r , +0.521 and +0.397, respectively; Online Supplemental Table S-7). On the other hand, the Ra-poor and SO_4 -rich waters were oxidizing as was indicated by the high DO and low Fe concentrations (Fig. 10). Of the 38 samples of near-neutral to alkaline SO_4 -dominated waters with concentration of DO > 1.1 mg/L, none contained combined Ra in excess of the MCL and the concentrations rarely exceeded 0.037 Bq/L. The inverse trend among Ba and SO_4 concentrations (Fig. 11) implies the possibility that barite precipitate may form, or at least that excess SO_4 minimizes Ba solubility. Calculation of the saturation states of the SO_4 -dominated water samples with respect to barite indicated that they were uniformly at saturation with respect to barite (97.8% had positive saturation index (SI), Fig. 11). About half (48.2%) of the HCO_3 -dominated waters were at saturation with respect to barite.

The generally alkaline and oxic SO_4 -dominated water type samples (high SC and high SO_4 with concentrations that in some samples exceeded 1000 mg/L, but low in Ra) were mostly from the arid western USA, from the MWF, PCAF and RGR PAs (Table 1). Evapotranspiration is likely to increase the TDS considerably there.

The formation of barite precipitate is possible if a steady source of Ba to solution is available, which the considerable weathering of the immature alluvial and basin-fill sediments is likely to supply (Reynolds et al., 2003), in the oxic environment, the formation of Fe- and Mn-oxyhydroxides results from the weathering of Fe- and Mn-bearing minerals. Many of the alluvial-fan and fluvial unconsolidated sand deposits of the PAs in the western USA do not contain electron donors (organic C) at sufficiently high concentrations to consume available DO and establish an anoxic environment (McMahon et al., 2004; McMahon and Chapelle, 2008). For 25 SO_4 -dominated samples that were saturated with respect to barite and Ra radionuclide concentrations were <the SSMDC, the concentration of Fe was most typically about 10 $\mu\text{g/L}$ or less and exceeded 100 $\mu\text{g/L}$ in only 7 (28%) (Fig. 10). Adsorption of Ra is likely, foremost rapidly onto abundant Fe- and Mn-oxyhydroxides (Krishnaswami et al., 1982). The possible rapid co-precipitation of Ra with barite may operate in conjunction with the sorptive processes to limit the Ra concentrations. Barite formation as a sink for Ra has been documented at mine-waste sites in the western USA (Martin and Akber, 1999).

Samples with high concentrations of SO_4 and of Ra that commonly exceeded the MCL were anoxic in character and were most often from the MCOO PA, and occasionally from the FLRD PA. The materials comprising these PAs contain electron donors (organic C, sulfide minerals) and beds with low permeability matrix that form effective confining units, and anoxic geochemical settings are common (McMahon and Chapelle, 2008). For the 12 SO_4 -dominated samples that were saturated with respect to barite and yet had concentrations of combined Ra that were \geq the MCL, the concentrations of DO were ≤ 1.1 mg/L and the concentration of Fe exceeded 100 $\mu\text{g/L}$ in 10 (83.3%) (Fig. 10). In many of the SO_4 -dominated waters, little Ba is present in solution (typically less than 10^{-7} moles/L; Fig. 11). With little Ba present, it is possible that barite micro-crystals do not nucleate readily to allow formation of even minor amounts of barite precipitate, or the barite precipitation rates may be very slow. The Ra supply to the ground water, in contrast to Ba, is not only a function of weathering, but also is

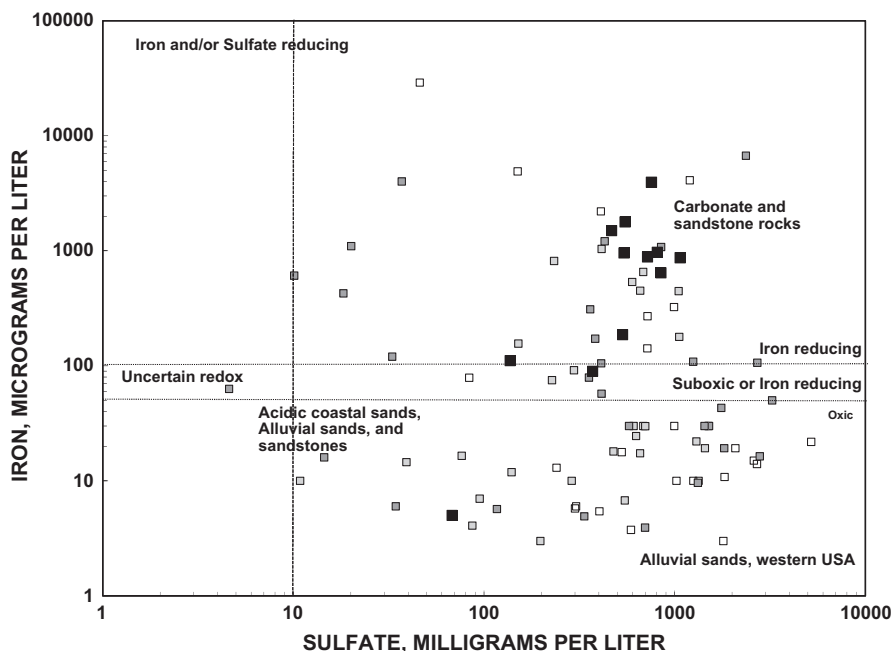


Fig. 10. Relationships between concentrations of SO_4 and Fe in water samples in which the SO_4 anion is predominant from 15 principal aquifer systems of the USA, 1993–2005, with the range of concentrations of combined Ra (^{226}Ra plus ^{228}Ra) indicated. [Concentrations of combined Ra: open, small symbol, less than (<) sample-specific minimum detectable concentration; light gray, small symbol, quantifiable concentration < 0.037 Bq/L; dark gray, small symbol, greater than or equal to 0.037 Bq/L but < 0.185 Bq/L; large, solid black symbol, ≥ 0.185 Bq/L. 1 Bq/L = 27.027 pCi/L.]

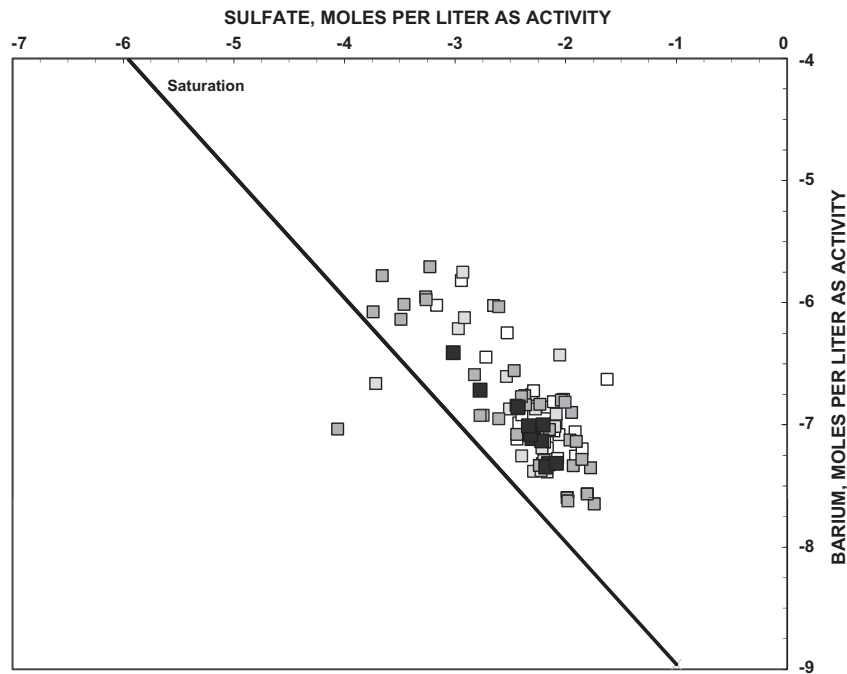


Fig. 11. Relationships between concentrations of SO_4 and Ba in samples in which the SO_4 anion is predominant from 15 principal aquifer systems of the USA, 1993–2005, with the range of concentrations of combined Ra (^{226}Ra plus ^{228}Ra) indicated. [Diagonal line is the line of saturation for water with respect to barite using a value for barite solubility product at saturation of $10^{-9.97}$. Concentrations of combined Ra: open, small symbol, less than (<) sample-specific minimum detectable concentration; light gray, small symbol, quantifiable concentration < 0.037 Bq/L; dark gray, small symbol, greater than or equal to 0.037 Bq/L but < 0.185 Bq/L; large, solid black symbol, ≥ 0.185 Bq/L. 1 Bq/L = 27.027 pCi/L.]

a function of alpha recoil from mineral grains or surfaces (Fleischer, 1980; Reynolds et al., 2003). The relative amount of Ra in comparison to the Ba may increase as Ra is released from both weathering and recoil processes, and in the absence of sinks that may rapidly uptake Ra, the Ra released by alpha recoil may become a critical Ra source. The Ra/Ba molar ratio in the water will increase with residence time. The increase in concentrations of Ra and in the molar Ra/Ba ratio is notable in carbonate-rock type aquifers because sorptive oxides and clays are often low in the aquifer matrix to begin with, and in the anoxic environments, the relative Ra adsorption coefficient is likely to remain low (Krishnaswami et al., 1982). Slow barite precipitation in these circumstances is likely an inefficient sink for Ra. Grundl and Cape (2006) advanced a similar hypothesis for samples they analyzed from along groundwater flowpaths from the MCOO PA.

Additional geochemical mechanisms may contribute to providing the conditions for occurrence of elevated Ra concentrations in SO_4 -rich anoxic waters. A decrease in Ra partitioning into any barite that does form may be likely, especially in Ca-rich waters where barite precipitation itself is limited in amount and is kinetically slow (Sturchio et al., 2001; Eikenberg et al., 2001; Arndt, 2010). The presence of elevated Sr concentrations may limit Ra uptake in barite (Ceccarello et al., 2004), and so may increasing temperatures (Langmuir and Melchoir, 1985), a factor for anoxic waters at depth. Concentrations of Ca ranged from 80 to 280 mg/L and those of Sr ranged from 1200 to 7440 $\mu\text{g/L}$ in these samples. Celestite, the sulfate salt of Sr, is capable of taking up Ra, but is slightly more soluble than barite. Concentrations of Sr correlated strongly and significantly positively with concentrations of ^{226}Ra and combined Ra in all water types, including where SO_4 is the predominant anion (r , +0.256; Online Supplemental Table S-7), and in 9 of 15 PAs including the MCOO (Online Supplemental Table S-5). Therefore, it is unlikely that co-precipitation of Ra with celestite is a control on limiting Ra concentrations in these ground waters used for drinking. Sulfate-reducing conditions in some producing

zones at depth in the thick MCOO PA (Gilkeson and Cowart, 1987) may limit barite precipitation or may enhance barite dissolution and thereby insure Ba and Ra solubility at particular depth intervals. Waters from zones high in SO_4 may mix with waters from zones high in Ra and low in SO_4 , and may thereby affect the Ra content of the collected water sample. Indicators of mixed redox conditions (McMahon and Chapelle, 2008) were common from the GLCL and MWFT PAs, and (parts of) the CPTG, MCOO and MWAF PAs, implying mixing along sharp concentration gradients.

5. Implications of understanding geochemistry of radium occurrence

Results from this study detail how Ra occurrence can vary in wells from different geologic regions or PAs in the USA on the basis of different geochemical environments. The broad generalized assessment can be made that aquifer materials with low sorptive capacity such as limestones or mature (quartzose) sands in combination with geochemical properties that minimize adsorption efficiency including acidic, anoxic/suboxic, and mineralized conditions correspond to provide the highest likelihood of Ra occurrence (Tables 3 and 5). Most commonly, when the underlying bedrock/sediment is characterized by high organic-C content or high degrees of confinement with little influx of DO-rich water, contact between the water and the sediment material leads to consumption of electrons, onset of anoxic conditions, and reductive dissolution of Fe and Mn that limits potential Ra sorption to reactive oxyhydroxides of these metals, with ensuing relative increase in Ra mobility. The lesser relative amounts of adsorption of Ra likely leads to the increase in Ra concentration even where Ra, U and Th are not abundant in the aquifer matrix and concentrations of U and ^{222}Rn in the waters are low (Table 3).

A limitation of this study is the degree of uncertainty at the local scale given aquifer-wide variability of physical and geochemical factors that may mobilize Ra. Geochemical variability may be large locally as a result of depth differences, for example. The sampled well types and well depths were not distributed evenly among the PAs (Table 1) precluding detailed assessment of effects of such local variability. The Ra occurrence nationwide is broadly controlled by geochemical properties (the frequent presence of elevated concentrations of Ra in reducing waters), but is not directly, simply, or uniquely defined by the occurrence pattern of any single surrogate constituent (such as high Fe; see Online Supplemental Table S-5) but depends on multiple geochemical factors. A single nationwide Ra occurrence model does not fit because of the multiple geochemical environments for Ra occurrence (mobilization). Factors related to geology and climate affect, to some degree, the acidity, redox potential, degree of mineralization, and composition of ground waters, as well as their potential residence time, and each of these factors can exert local control on sorption properties and thereby also affect the occurrence pattern of the isotopes of Ra.

The information broadly detailing Ra occurrence and typically associated geochemical environments can be particularly useful to private homeowners with domestic wells, because these water systems generally are not monitored regularly for Ra (DeSimone, 2009), unlike public-supply wells that are monitored under the Safe Drinking Water Act (USEPA, 2000a; Focazio et al., 2001). More than 40 million people in the USA consume water from these private wells that are not regulated or monitored and could pose a source of exposure. The Ra-occurrence data and associated geochemical data collected from large-scale regional studies such as this one (and perhaps data that is measured locally in the public-supply wells), could be applied with an understanding of the broad geochemical conditions (anoxic/suboxic, acidic, mineralized) in which Ra may be elevated to provide assistance to private-well owners in identifying where the risks are highest and can guide the prioritization for testing (actual data collection) from private wells in these areas. The random measurement of only the gross alpha-particle activity of the water samples without knowledge of the broader context of the geochemical environments may not provide enough information to assess Ra occurrence and exposure to it because the amount of alpha radioactivity emission is controlled more often by the occurrence of U than of Ra (Table 4). Concentrations of Ba, Sr, Fe and Mn consistently correlated with concentrations of all the Ra isotopes in nearly all the PAs (typically in 9 of the 15) and geochemical conditions (Table 5; Online Supplemental Table S-5), and among the samples, concentrations of Ra correlated directly, whereas concentrations of U correlated inversely, with concentrations of Fe (Table 5; Online Supplemental Tables S-6 and S-7). Thus, the concentrations of these constituents are of interest because, especially when coupled with measurement of the gross alpha-particle activity in particular geochemical environments, they might provide an indication of the general potential that elevated levels of Ra are present when the actual Ra concentrations have not been determined.

The usefulness of the implementation of these findings is illustrated in the testing of domestic wells in the CPNA PA in New Jersey. Guidelines for New Jersey's Private Well Testing Act (New Jersey Register, 2002) require testing and analysis for gross alpha-particle activity in water from domestic wells because a local study demonstrated the frequently occurring presence of elevated concentrations of Ra were associated with elevated gross alpha-particle radioactivity in the strongly acidic waters (Szabo et al., 2005), whereas U concentrations were low in that environment. The knowledge gained of the geochemical environment allowed the well-water testing program to be optimized within the specific aquifer system by focusing on the quick and inexpensive gross al-

pha-particle activity analysis. The findings from the larger-scale study reported here confirm the inverse correlation of concentrations of combined Ra with pH for the CPNA PA (Fig. 9 and Table 5; Online Supplemental Tables S-5 and S-6) and imply that the optimized testing program could be applied on the regional scale for the aquifer system. The Ra, when occurrence is identified, can readily be remediated (lowered or removed) by homeowners with a well-maintained water softener (cation exchange) system (Lucas, 1987; Szabo et al., 2010). Continued public education and testing of domestic wells is advisable (DeSimone, 2009; Treyens, 2009), particularly in those PAs and in those geochemical conditions in which relatively high drinking-water occurrence frequencies for Ra were identified in this study.

6. Conclusions

Broad trends in Ra occurrence within the USA are delineated in the context of the geological and geochemical framework provided in this assessment that is the first to not only characterize the occurrence of the three major isotopes of Ra throughout much of the USA using data collected in a consistent manner, but also to assess their occurrence with respect to geochemical environment. Seven principal aquifer systems (PAs) of the 15 studied were identified in which the exceedences of the US Environmental Protection Agency maximum contaminant level of 0.185 Bq/L (5 pCi/L) for combined Ra (^{226}Ra plus ^{228}Ra) occurred in 39 (4.02%) of 971 samples for which both ^{226}Ra and ^{228}Ra were determined, and in 40 (3.15%) of 1266 samples in which at least one of these isotopes were determined. The Ra occurrence is broadly controlled by the geochemical properties of Ra, primarily sorption, desorption, and exchange, and possibly co-precipitation with barite in the most SO_4 -rich and oxic regions. When the underlying bedrock or sediment comprising an aquifer system has characteristics (high organic C, hydrologic confinement) that leads to rapid consumption of oxic species, or is composed of materials that have poor acid-neutralizing or sorptive capacity (extremely quartzose sands or carbonate rocks), relative increase in Ra mobility (lesser amount of adsorption) is likely even if Ra is not abundant in the bedrock or sediment. Concentrations of combined Ra greater than the MCL were most commonplace in the MCOO and the CPNA PAs because of favorable geochemical conditions (anoxic mineralized or acidic waters, respectively) that enhanced Ra mobility. The presence of anoxic geochemical conditions were related to the occurrence of Ra concentrations that exceeded the MCL in one or more samples in the APMB, CNEY, FLRD, CPTG, and GLCL PAs, and were related to occurrence of lesser but detectable concentrations in the MWFT, APVR and HPTA PAs, as was a combination of acidic and anoxic conditions in the CPSE PA. In each PA with these broad geochemical conditions, other indicators of radioactivity and geochemical environment such as gross alpha-particle activity in association with concentrations of Fe, Mn, Ba and Sr are of interest because they provide indirect information of the possible presence of elevated concentrations of Ra, though specific occurrence patterns vary locally.

Acknowledgments

Members of the US Environmental Protection Agency (USEPA) Radionuclide Rule Assessment Team, led by David Huber, were instrumental in providing support and discussion regarding Ra occurrence information and implications for water utilities; further assistance and insight from USEPA was provided by Miguel del Toral, Francine St. Denis, Dan Mackney, Marcel Belaval, Samuel Hernandez, and Keara Moore. Barker Hamill, New Jersey Department of Environmental Protection, obtained perspective from, and

provided information to, the Drinking-Water Administrators of various states and to public supply utility management teams regarding health risk from ^{224}Ra in drinking water, and has been a ceaseless advocate for testing water supplies, including private wells. Michael Yurewicz, Wayne Lapham, and William Wilbur of the US Geological Survey (USGS) National Water Quality Assessment (NAWQA) Program provided crucial liaison and technical support. Ann H. Mullin of the USGS National Water Quality Laboratory and David McCurdy of Duke Engineering Services helped coordinate the laboratory analyses, especially the alpha-spectrometric analyses for determination of ^{224}Ra concentrations. Richard Bell assisted with use of the Oracle NAWQA database information system. USGS colleagues Michael Focazio and George Bennett provided helpful comments on an early version of the manuscript, and Gary Rowe, John Wilson, Tracy Hancock, and Neil Dubrovsky provided additional discussions and insight. The authors thank colleagues from USGS Water Science Centers for collecting samples for Ra analysis. Use of trade names is for identification purposes only, and does not constitute endorsement by the United States government. Additional information regarding this and other USGS studies regarding the occurrence of Ra can be obtained on the world-wide-web at <http://water.usgs.gov/nawqa/trace/radium>.

Appendix A. Supplementary data

Supplementary data associated with this article can be found, in the online version, at [doi:10.1016/j.apgeochem.2011.11.002](https://doi.org/10.1016/j.apgeochem.2011.11.002).

References

- Ames, L.L., McGarrath, J.E., Walker, B.A., 1983a. Sorption of trace constituents from aqueous solutions onto secondary minerals II. Radium. *Clays Clay Miner.* 31, 335–342.
- Ames, L.L., McGarrath, J.E., Walker, B.A., Salter, F., 1983b. Uranium and radium sorption on amorphous ferric oxyhydroxide. *Chem. Geol.* 40, 135–148.
- Appelo, C.A.J., 1994. Cation and proton exchange, pH variations, and carbonate reactions in a freshening aquifer. *Water Resour. Res.* 30, 2793–2805.
- Arndt, M.F., 2010. Evaluation of Gross Alpha and Uranium Measurements for MCL Compliance. Water Research Foundation, Denver, CO.
- Arndt, M.F., West, L.E., 2008. An experimental analysis of the contribution of factors affecting gross alpha-particle activity with an emphasis on ^{224}Ra and ^{226}Ra and progeny to the gross alpha-particle activity of water samples. *Health Phys.* 94, 459–470.
- Arnold, T.L., Warner, K.L., Groschen, G.E., Caldwell, J.P., Kalkhoff, S.J., 2008. Hydrochemical Regions of the Glacial Aquifer System, Northern United States, and their Environmental and Water-quality Characteristics. US Geol. Surv. Water-Resour. Invest. Rep. 2008-5015. <<http://pubs.usgs.gov/sir/2008/5015/>>.
- ASTM (American Society for Testing and Materials), 1999. Measurement of radioactivity. In: American Society for Testing and Materials Standards, v. 11.02, Philadelphia, PA.
- Ayotte, J.D., Flanagan, S.M., Morrow, W.S., 2007. Occurrence of uranium and ^{222}Rn in Glacial and Bedrock Aquifers in the Northern United States, 1993–2003. US Geol. Surv. Sci. Invest. Rep. 2007-5037. <<http://pubs.usgs.gov/sir/2007/5037/>>.
- Back, W., 1966. Hydrochemical Facies and Ground-water Flow Patterns in the Northern Part of the Atlantic Coastal Plain. US Geol. Surv. Prof. Paper 498-A.
- Benes, P., Strejc, P., Lukavec, Z., 1984. Interaction of radium with freshwater sediments and their mineral components. 1. Ferric-hydroxide and quartz. *J. Radioanal. Nucl. Chem.* 82, 275–285.
- Bolton, D.W., 2000. Occurrence and distribution of radium, gross alpha-particle activity, and gross beta-particle activity in ground water in the Magothy Formation and Potomac Group aquifers, upper Chesapeake Bay area, Maryland. Maryland Geol. Surv. Report of Investigations No. 70.
- Ceccarello, S., Black, S., Read, D., Hodson, M.E., 2004. Industrial radioactive barite scale: suppression of radium uptake by introduction of competing ion. *Miner. Eng.* 17, 323–330.
- Cech, I.M., Howard, M.P., Mayerson, A., Lemma, M., 1987. Pattern of distribution of radium-226 in drinking water of Texas. *Water Resour. Res.* 23, 1987–1995.
- Cothern, R.C., Jarvis, A.N., Whittaker, E.L., Battist, L., 1984. Radioactivity in environmental samples: calibration standards measurement methods, quality assurance, and data analysis. *Environ. Int.* 10, 109–116.
- Currie, L.A., 1968. Limits for qualitative detection and quantitative determination: application to radiochemistry. *Anal. Chem.* 20, 586–593.
- Desimone, L.A., 2009. Quality of water from domestic wells in principal aquifers of the United States, 1991–2004. US Geol. Surv. Sci. Invest. Rep. 2008-5227. <<http://pubs.usgs.gov/sir/2008/5227/>>.
- Duval, J.S., Riggle, F.E., 1999. Profiles of Gamma-ray and Magnetic data from Aerial Surveys over the Conterminous United States. US Geol. Surv. Digital Data Series – 0031 (release 2).
- Eikenberg, J., Tricca, A., Vezzu, G., Bajo, S., Ruethi, M., Surbeck, H., 2001. Determination of ^{228}Ra , ^{226}Ra , and ^{224}Ra in natural water via adsorption on MnO_2 -coated discs. *J. Environ. Radioact.* 54, 109–131.
- Elsinger, R.J., Moore, W.S., 1983. ^{224}Ra , ^{228}Ra , and ^{226}Ra in Winyah Bay and Delaware Bay. *Earth Planet. Sci. Lett.* 64, 430–436.
- Elsinger, R.J., King, T., Moore, W.S., 1982. Radium-224 in natural waters measured by gamma-ray spectrometry. *Anal. Chim. Acta* 144, 277–281.
- Evans, R.D., 1933. Radium poisoning: a review of present knowledge. *Am. J. Public Health* 23, 1017–1023.
- Faires, L.M., 1993. Methods of Analysis by the US Geological Survey National Water Quality Laboratory – Determination of Metals in Water by Inductively Coupled Plasma-mass Spectrometry. US Geol. Surv. Open-File Rep. 92-634. <<http://usgs.gov/of/1992/0634/>>.
- Fishman, M.J., Friedman, L.C., 1989. Methods for Determination of Inorganic Substances in Water and Fluvial Sediments. Techniques of Water-Resources Investigations of the US Geological Survey, Book 5 (Chapter A1). <<http://pubs.usgs.gov/twri/twri5-a1/>>.
- Fleischer, R.L., 1980. Isotopic disequilibrium of uranium: alpha-recoil damage and preferential solution effects. *Science* 207, 979–981.
- Focazio, M.J., Szabo, Z., Kraemer, T.F., Mullin, A.H., Barringer, T.H., dePaul, V.T., 2001. Occurrence of Selected Radionuclides in Ground Water used for Drinking Water in the United States: A Reconnaissance Survey, 1998–99. US Geol. Surv. Water-Resour. Invest. Rep. 00-4273. <<http://pubs.usgs.gov/wri/wri004273/>>.
- Gilkeson, R.H., Cowart, J.B., 1987. Radium, radon, and uranium isotopes in ground water from Cambrian–Ordovician sandstone aquifers in Illinois. In: Graves, B. (Ed.), *Radon in Ground Water – Hydrogeologic Impact and Indoor Air Contamination*. Lewis Publishers, Inc., Chelsea, MI, pp. 403–422.
- Grundl, T., Cape, M., 2006. Geochemical factors controlling radium activity in a sandstone aquifer. *Ground Water* 44, 518–527.
- Helsel, D.R., Hirsch, R.M., 1992. *Statistical Methods in Water Resources*. Elsevier, New York.
- Herczeg, A.L., Simpson, H.J., Anderson, R.F., Trier, R.M., Mathieu, G.G., Deck, B.L., 1988. Uranium and radium mobility in groundwaters and brines within the Delaware Basin, Southeastern New Mexico, USA. *Chem. Geol.* 72, 181–196.
- Hess, C.T., Michel, J., Horton, T.R., Prichard, H.M., Coniglio, W.A., 1985. The occurrence of radioactivity in public water supplies in the United States. *Health Phys.* 48, 553–586.
- Hodge, V.F., Stetzenbach, K.J., Johannesson, K.H., 1998. Similarities in the chemical composition of carbonate ground waters and seawater. *Environ. Sci. Technol.* 32, 2481–2486.
- Jurgens, B.C., Fram, M.S., Belitz, K., Burow, K.R., Landon, M.K., 2009. Effects of groundwater development on uranium: Central Valley, California, USA. *Ground Water* 47, 1–16.
- Katz, B.G., Crandall, C.A., Metz, A., McBride, W.S., Berndt, M.P., 2007. Chemical Characteristics, Water Sources and Pathways, and Age Distribution of Ground Water in the Contributing Recharge Area of a Public-Supply Well near Tampa, Florida, 2002–05. US Geol. Surv. Sci. Invest. Rep. 2007-5139. <<http://pubs.usgs.gov/sir/2007/5139/pdf/sir2007-5139.pdf>>.
- Kaufmann, R.F., Eadie, G.G., Russell, C.R., 1976. Effects of uranium mining and milling on ground water in the Grants Mineral Belt, New Mexico. *Ground Water* 14, 16–25.
- Kim, G., Burnett, W.C., Dulaiova, H., Swarzenski, P.W., Moore, W.S., 2001. Measurement of ^{224}Ra and ^{226}Ra activities in natural waters using a radon-in-air monitor. *Environ. Sci. Technol.* 35, 4680–4683.
- King, T., Michel, J., Moore, W.S., 1982. Ground-water geochemistry of ^{228}Ra , ^{226}Ra , and ^{222}Rn . *Geochim. Cosmochim. Acta* 46, 1173–1182.
- Korner, L.A., Rose, A.W., 1977. Rn in Streams and Ground Waters of Pennsylvania as a Guide to Uranium Deposits. US Energy Research and Development Assoc. Open-File Report GJBX-60 (77), Grand Junction, CO.
- Koterba, M.T., Wilde, F.D., Lapham, W.W., 1995. Ground-water Data-collection Protocols and Procedures for the National Water-Quality Assessment Program: Collection and Documentation of Water-quality Samples and Related Data. US Geol. Surv. Open-File Rep. 95-399. <<http://pubs.usgs.gov/of/1995/ofr-95-399/pdf/of95-399.pdf>>.
- Kraemer, T.F., Curwick, B., 1991. Radium isotopes in the lower Mississippi River. *J. Geophys. Res.* 96, 2797–2806.
- Kraemer, T.F., Reid, D.F., 1984. The occurrence and behavior of radium in saline formation water of the US Gulf Coast Region. *Chem. Geol.* 2, 153–174.
- Krest, J.M., Moore, W.S., Rama, 1999. ^{226}Ra and ^{228}Ra in the mixing zones of the Mississippi and Atchafalaya Rivers: indicators of ground water input. *Mar. Chem.* 64, 139–152.
- Kriege, L.B., Hahne, R.M.A., 1992. ^{226}Ra and ^{228}Ra in Iowa drinking water. *Health Phys.* 43, 543–559.
- Krieger, H.L., Whittaker, E.L., 1980. Prescribed Procedures for Measurement of Radioactivity in Drinking Water. US Environmental Protection Agency Manual EPA-600/4-80-032.
- Krishnaswami, S., Graustein, W.C., Turekian, K.K., Dowd, J.F., 1982. Radium, thorium, and radioactive isotopes in ground waters: application to the in situ determination of adsorption–desorption rate constants and retardation factors. *Water Resour. Res.* 18, 1633–1645.
- Landa, E.R., Phillips, E.J.P., Lovely, D.R., 1991. Release of ^{226}Ra from uranium mill tailings by microbial Fe(III) reduction. *Appl. Geochem.* 6, 647–652.

- Langmuir, D., 1978. Uranium solution–mineral equilibria at low temperatures with applications to sedimentary ore deposits. *Geochim. Cosmochim. Acta* 42, 547–569.
- Langmuir, D., Herman, J., 1980. The mobility of Th in natural waters at low temperatures. *Geochim. Cosmochim. Acta* 44, 1753–1766.
- Langmuir, D., Melchoir, D., 1985. The geochemistry of Ca, Sr, Ba and Ra sulfates in some deep brines from the Palo Duro Basin, Texas. *Geochim. Cosmochim. Acta* 49, 2423–2432.
- Langmuir, D., Riese, A.C., 1985. The thermodynamic properties of radium. *Geochim. Cosmochim. Acta* 49, 1593–1601.
- Lapham, W.W., Hamilton, A., Myers, D.N., 2005. National Water Quality Assessment Program–Cycle II Regional Assessment of Aquifers. US Geol. Surv. Fact Sheet 2005-3013. <<http://pubs.usgs.gov/fs/2005/3013/pdf/PASforWeb.pdf>>.
- Longtin, J.P., 1988. Occurrence of radon, radium and uranium in groundwater. J. Am. Water Works Assoc. Spring, 84–93.
- Lucas, H.F., 1987. Radium removal by a home water softener. *J. Environ. Radioact.* 5, 359–362.
- Martin, P., Akber, R.A., 1999. Radium isotopes as indicators of adsorption–desorption interactions and barite formation in groundwater. *J. Environ. Radioact.* 46, 271–286.
- Mays, C.W., Rowland, R.E., Stehney, A.F., 1985. Cancer risk from the lifetime intake of Ra and U isotopes. *Health Phys.* 48, 635–647.
- McCurdy, D.E., Garbarino, J.R., Mullin, A.H., 2008. Interpreting and Reporting Radiological Water-quality Data. US Geol. Surv. Techniques and Methods, Book 5 (Chapter B6). <<http://pubs.usgs.gov/tm/05b06/>>.
- McMahon, P.B., Chapelle, F.H., 2008. Redox processes and water quality of selected principal aquifer systems. *Ground Water* 46, 259–271.
- McMahon, P.B., Böhlke, J.K., Christenson, S.C., 2004. Geochemistry, radiocarbon ages, and paleorecharge conditions along a transect in the Central High Plains aquifer, southwestern Kansas, USA. *Appl. Geochem.* 19, 1655–1686.
- Michel, J., Cothorn, C.R., 1986. Predicting the occurrence of ^{226}Ra in ground water. *Health Phys.* 51, 715–721.
- Miller, R.L., Sutcliffe Jr., H., 1985. Occurrence of Natural Radium-226 Radioactivity in Ground Water of Sarasota County, Florida. US Geol. Surv. Water-Resour. Invest. Rep. 84-4237.
- Moore, W.S., Reid, D., 1973. Extraction of radium from natural waters using manganese-impregnated acrylic fibers. *Deep Sea Res.* 23, 647–651.
- Morvan, K., Andres, Y., Mokili, B., Abbe, J.C., 2001. Determination of radium-226 in aqueous solutions by alpha-spectrometry. *Anal. Chem.* 73, 4218–4224.
- Nathwani, J.S., Phillips, C.R., 1979. Adsorption of ^{226}Ra by soils in the presence of Ca^{2+} ions: Specific adsorption (II). *Chemosphere* 8, 293–299.
- New Jersey Register, 2002. Water Supply Administration 2002. The Private Testing Act Rules, adopted new rules. New Jersey: Administrative Code, Title 7, Chapter 9B. *New Jersey Register* 34 (18), 3236–3264.
- Nour, S., El-Sharkaway, A., Burnett, W.C., Horwitz, E.P., 2004. Radium-228 determination of natural waters via concentration on manganese dioxide and separation using Diphonix ion exchange resin. *Appl. Radiat. Isotopes* 61, 1173–1178.
- Osmond, J.K., Cowart, J.B., 1976. The theory and uses of natural uranium isotopic variations in hydrology. *Atomic Energy Rev.* 14, 621–679.
- Parkhurst, D.L., Appelo, C.A.J., 1999. User's guide to PHREEQC (version 2): a computer program for speciation, batch-reaction, one-dimensional transport, and inverse geochemical calculations US. Geol. Surv. Water-Resour. Invest. Rep. 99-4259.
- Parsa, B., 1998. Contribution of short-lived radionuclides to alpha-particle radioactivity in drinking water and their impact on the Safe Drinking Water Act Regulations. *Radioact. Radiochem.* 9, 41–50.
- Pritchard, H.M., Gesell, T.F., 1977. Rapid measurements of Rn-222 concentrations in water with a commercial liquid scintillation counter. *Health Phys.* 33, 577–581.
- Reynolds, B.C., Wasserburg, G.J., Baskaran, M., 2003. The transport of U- and Th-series nuclides in sandy confined aquifers. *Geochim. Cosmochim. Acta* 67, 1955–1972.
- Robertson, W.D., Schiff, S.L., Ptacek, C.J., 1998. Review of phosphate mobility and persistence in 10 septic system plumes. *Ground Water* 36, 1000–1010.
- Roden, E.F., Zachara, J.M., 1996. Microbial reduction of crystalline iron(III) oxides: influence of oxide surface area and potential for cell growth. *Environ. Sci. Technol.* 30, 1618–1628.
- Ruberu, S.R., Liu, Y.-G., Perera, S.K., 2005. Occurrence of ^{224}Ra , ^{226}Ra , ^{228}Ra , gross alpha, and uranium in California ground water. *Health Phys.* 89, 667–678.
- Sarin, M.M., Krishnaswami, S., Somayajulu, B.L.K., Moore, W.S., 1990. Chemistry of uranium, thorium, and radium isotopes in the Ganga-Brahmaputra river system: weathering processes and fluxes to the Bay of Bengal. *Geochim. Cosmochim. Acta* 54, 1387–1396.
- Scott, R.C., Barker, F.B., 1962. Data on Uranium and Radium in Ground Water in the United States 1954 to 1957. US Geol. Surv. Prof. Paper 426.
- Senior, L.A., Vogel, K.L., 1995. Radium and Radon in Ground Water in the Chickies Quartzite, Southeastern Pennsylvania. US Geol. Surv. Water-Resour. Invest. Rep. 92-4088. <<http://pubs.usgs.gov/wri/1992/4088/>>.
- Sill, C.W., 1987. Determination of radium-226 in ores, nuclear wastes, and environmental samples by high-resolution alpha spectrometry. *Nucl. Chem. Waste Manage.* 7, 239–254.
- Sill, C.W., Olson, D.G., 1970. Sources and prevention of recoil contamination of solid-state alpha detectors. *Anal. Chem.* 42, 1596–1607.
- Sill, C.W., Williams, R.L., 1981. Preparation of actinides for alpha-spectrometry without electrodeposition. *Anal. Chem.* 53, 412–415.
- Sill, C.W., Hindman, F.D., Anderson, J.L., 1979. Simultaneous determination of alpha-emitting radionuclides of radium through californium in large environmental and biological samples. *Anal. Chem.* 51, 1307–1314.
- Silvester, E., Charlet, L., Tournassat, C., Gehin, A., Grenèche, J.M., Liger, E., 2005. Redox potential measurements and Mossbauer spectrometry of FeII adsorbed onto FeIII (oxyhydr)oxides. *Geochim. Cosmochim. Acta* 69, 4801–4815.
- Sloto, R.A., 2000. Naturally Occurring Radionuclides in Ground Water of Southeastern Pennsylvania. US Geol. Surv. Fact Sheet 012-00. <<http://pa.water.usgs.gov/reports/fs012-00.html>>.
- Starns, J.J., Brown, C.J., 2007. Simulations of Ground-water Flow and Residence time Near Woodbury, Connecticut. US Geol. Surv. Sci. Invest. Rep. 2007-5210. <<http://pubs.usgs.gov/sir/2007/5210/>>.
- Stumm, W., Morgan, J.J., 1981. *Aquatic Chemistry*. Wiley, New York.
- Sturchio, N.C., Böhlke, J.K., Markum, F.J., 1993. Radium isotope geochemistry of thermal waters, Yellowstone National Park, Wyoming. *Geochim. Cosmochim. Acta* 57, 1203–1214.
- Sturchio, N.C., Banner, J.L., Binz, C.M., Heraty, L.B., Musgrove, M., 2001. Radium geochemistry of ground waters in Paleozoic carbonate aquifers, midcontinent USA. *Appl. Geochem.* 16, 109–122.
- Swanson, V.E., 1962. *Geology and Geochemistry of Uranium in Marine Black Shales, A Review*. US Geol. Surv. Prof. Paper 356-C.
- Szabo, Z., Zapecza, O.S., 1991. Geologic and geochemical factors controlling uranium, radium-226, and radon-222 in ground water, Newark Basin, New Jersey. In: Gundersen, L.C.S., Wanty, R.B. (Eds.), *Field Studies of Radon in Rocks, Soils, and Water*. US Geol. Surv. Bull. 1971, 243–266.
- Szabo, Z., Rice, D.E., MacLeod, C.L., Barringer, T.H., 1997. Relation of Distribution of Radium, Nitrate, and Pesticides to Agricultural Land Use and Depth, Kirkwood–Cohansey Aquifer System, New Jersey Coastal Plain, 1990–91. US Geol. Surv. Water Resour. Invest. Rep. 96-4165A. <<http://pubs.usgs.gov/wri/1996/4165a/>>.
- Szabo, Z., dePaul, V.T., Kraemer, T.F., Parsa, B., 2005. Occurrence of Radium-224 and Comparison to that of Radium-226 and Radium-228 in Water from the Unconfined Kirkwood–Cohansey Aquifer System, Southern New Jersey. US Geol. Surv. Sci. Invest. Rep. 2004-5224. <<http://pubs.usgs.gov/sir/2004/5224/>>.
- Szabo, Z., Jacobsen, E., Kraemer, T.F., Parsa, B., 2010. Environmental fate of Ra in cation-exchange regeneration brine waste disposed to septic tanks, New Jersey Coastal Plain, USA: migration to the water table. *J. Environ. Radioact.* 101, 33–44.
- Tanner, A.B., 1964. Physical and chemical controls on distribution of radium-226 and radon-222 in ground water near Great Salt Lake, Utah. In: Adams, J.A.S., Lowder, W.M. (Eds.), *The Natural Radiation Environment*. Chicago University Press, Chicago, IL, pp. 161–190.
- Thomas, J.M., Welch, A.H., Lico, M.S., Hughes, J.L., Whitney, R., 1993. Radionuclides in ground water of the Carson River Basin, western Nevada and eastern California, USA. *Appl. Geochem.* 8, 447–471.
- Treyens, C., 2009. A winning strategy. *Water Well J.*, 38–40. April.
- Tricca, A., Wasserburg, G.J., Porcelli, D., Baskaran, M., 2001. The transport of U- and Th-series nuclides in a sandy unconfined aquifer. *Geochim. Cosmochim. Acta* 65, 1187–1210.
- Troyer, G.L., Jones, R.A., Jensen, L., 1991. The utility of reporting negative counting values. *Radioact. Radiochem.* 2, 48–56.
- Turner, R.C., Radley, J.M., Mayneord, W.V., 1961. Naturally occurring alpha-activity of drinking waters. *Nature* 189, 348–352.
- Turner-Peterson, C.E., 1980. Sedimentology and uranium mineralization in the Triassic–Jurassic Newark Basin, Pennsylvania and New Jersey. In: Turner-Peterson, C.E. (Ed.), *Uranium in Sedimentary Rocks – Application of the Facies Concept to Exploration*. Society Economic Paleontologists Mineralogists, Rocky Mountain Section, Short Course Notes, Denver, CO, pp. 149–175.
- Turner-Peterson, C.E., 1985. Lacustrine-humate model for primary uranium ore deposits, Grants uranium region, New Mexico. *Am. Assoc. Petrol. Geol.* 69, 1999–2020.
- US Environmental Protection Agency, 1976. Drinking water regulations; radionuclides. *Federal Register*, 41, 28402.
- US Environmental Protection Agency, 1999. Federal Guidance Report No. 13, Cancer risk coefficients for environmental exposure to radionuclides. EPA 402-R-99-001, Washington, DC.
- US Environmental Protection Agency, 2000a. National Primary Drinking Water Regulations; Radionuclides; Final rule, 40CFR parts 141 and 142. *Federal Register* 65, No. 236. <http://www.access.gpo.gov/nara/cfr/waisidx_02/40cfr141_02.html>.
- US Environmental Protection Agency, 2000b. National Primary Drinking Water Regulations; Radionuclides; Notice of Data Availability; Proposed Rule, 40 CFR Parts 141 and 142. EPA 815-2-00-003, pp. 21576–21628.
- US Geological Survey, 2005. Principal aquifers of the 48 conterminous United States, Hawaii, Puerto Rico, and the US Virgin Islands. US Geological Survey National Atlas. <www.nationalatlas.gov/>.
- Vengosh, A., Hirschfeld, D., Vinson, D., Dwyer, G., Raanan, H., Rimawi, O., Al-Zouri, A., Akkawi, E., Marie, A., Haquin, G., Zaarur, S., Ganor, J., 2009. High naturally occurring radioactivity in fossil groundwater from the Middle East. *Environ. Sci. Technol.* 43, 1769–1775.
- Warner, K.L., Arnold, T.L., 2005. Framework for regional synthesis of water-quality data for the glacial aquifer system in the United States. US Geol. Surv. Sci. Invest. Report 2005-5223. <<http://pubs.usgs.gov/sir/2005/5223/>>.
- Zapecza, O.S., Szabo, Z., 1987. Natural Radioactivity in Ground Water – A Review. US Geological Survey National Water Summary 1986. Ground-Water Quality: Hydrologic Conditions and Events, US Geol. Surv. Water Supply Paper 2325, pp. 50–57.